

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Kingbright](#)  
[AT2520SE9ZS-350MA](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Kingbright

## 2.5X2.0mm SURFACE MOUNT LED LAMP

Part Number: AT2520SE9ZS-350MA

Reddish-Orange



**ATTENTION**  
 OBSERVE PRECAUTIONS  
 FOR HANDLING  
 ELECTROSTATIC  
 DISCHARGE  
 SENSITIVE  
 DEVICES

### Features

- Dimension: 2.5mmx 2.0mm x 0.8mm.
- Low thermal resistance.
- Ceramic package with silicone resin.
- Small package with high efficiency.
- Surface mount technology.
- ESD protection.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 2a.
- Soldering methods: IR reflow soldering.
- RoHS compliant.

### Application Note

Static electricity and surge damage the LEDs.


It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

### Typical Applications

- PDA's
- Room lighting
- Architectural lighting
- Decorative/pathway lighting
- Front panel backlight
- Exterior automotive lighting:  
(brake lights, turn lights, backlighting)

### Package Dimensions

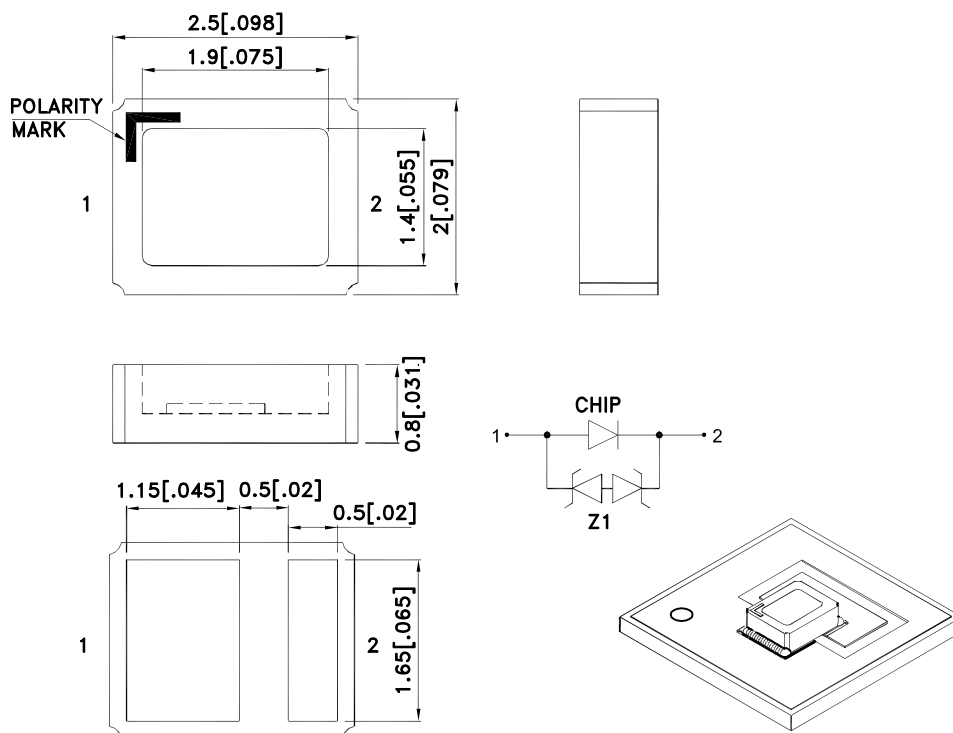

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.




# Kingbright

## Handling Precautions



Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.




3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



4.1. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.

4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.

4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as H<sub>2</sub>S might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

# Kingbright

## Selection Guide

Part No.	Dice	luminous Intensity [2] Iv(mcd)@ 350mA		Φv (lm) [2] @ 350mA	Viewing Angle [1]
		Min.	Typ.	Typ.	2 θ 1/2
AT2520SE9ZS-350MA	Reddish-Orange (AlGaInP)	8000	10500	23	130 °

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Value	Unit
DC Forward Current [1]	IF	350	mA
Peak Forward Current [2]	IFM	500	mA
Power dissipation	PD	1.05	W
Reverse Voltage	VR	5	V
Operating Temperature	Top	-40 To +100	°C
Storage Temperature	Tstg	-40 To +120	°C
Junction temperature[1]	TJ	120	°C
Thermal resistance [1] (Junction/ambient)	Rth j-a	95	°C/W
Thermal resistance [1] (Junction/solder point)	Rth j-s	30	°C/W
Electrostatic Discharge Threshold (HBM)		8000	V

Notes:

1. Results from mounting on metal core PCB, mounted on pc board-metal core PCB is recommend for lowest thermal resistance.
2. 1/10 Duty Cycle, 0.1ms Pulse Width.

## Electrical / Optical Characteristics at TA = 25°C







Parameter	Symbol	Value	Unit
Forward Voltage IF = 350mA [Min.]	VF [2]	2.0	V
Forward Voltage IF = 350mA [Typ.]		2.5	
Forward Voltage IF = 350mA [Max.]		3.0	
Allowable Reverse Current [Max.]	IR	85	mA
Wavelength at peak emission IF = 350mA [Typ.]	λ peak	635	nm
Dominant Wavelength IF = 350mA [Typ.]	λ dom [1]	623	nm
Spectral bandwidth at 50% Φ REL MAX IF = 350mA [Typ.]	Δλ	22	nm
Temperature coefficient of λ peak IF = 350mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TC λ peak	0.1	nm/°C
Temperature coefficient of λ dom IF = 350mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TC λ dom	0.08	nm/°C
Temperature coefficient of VF IF = 350mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TCV	-3.0	mV/°C

Notes:




1. Wavelength : +/- 1nm.
2. Forward Voltage : +/- 0.1V.

# Kingbright

## AT2520SE9ZS-350MA

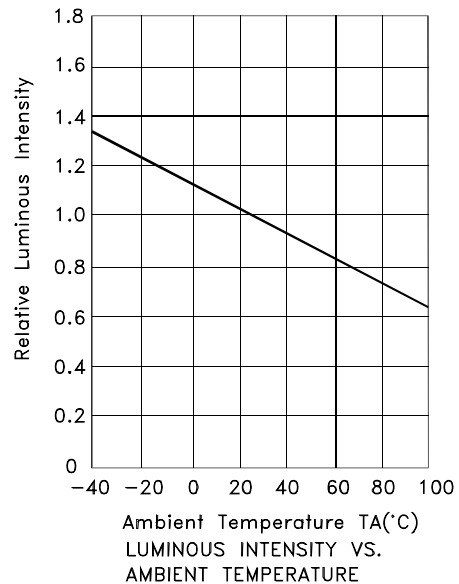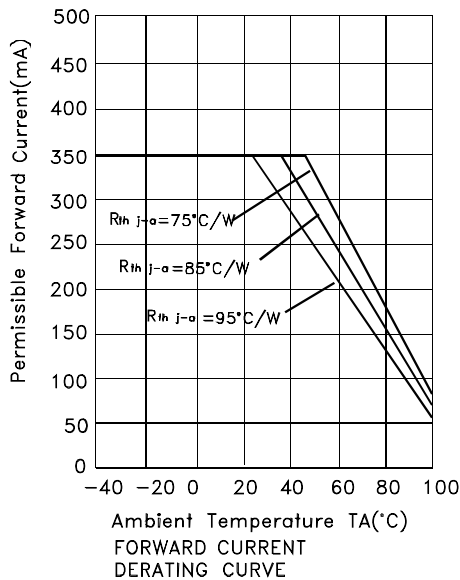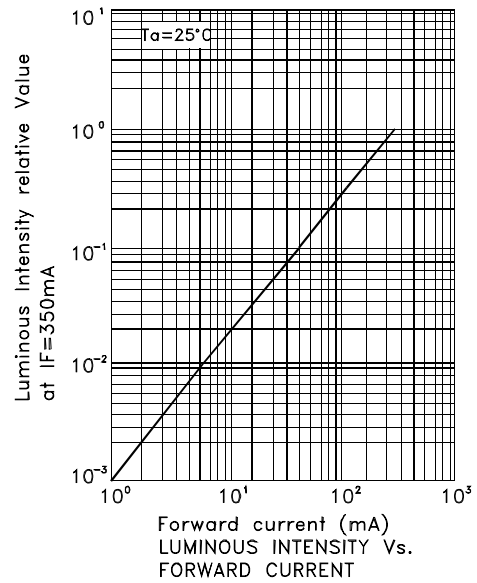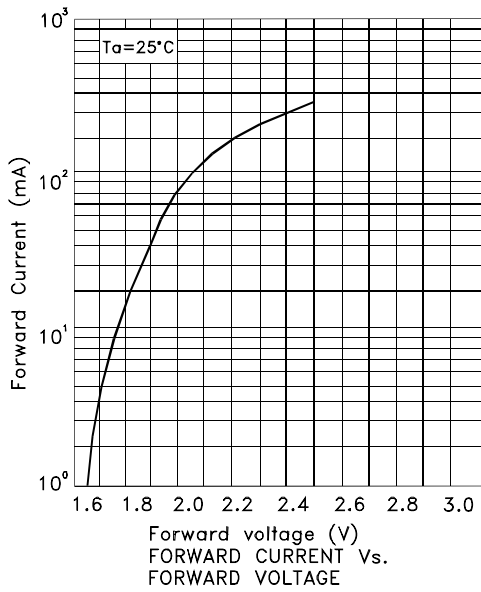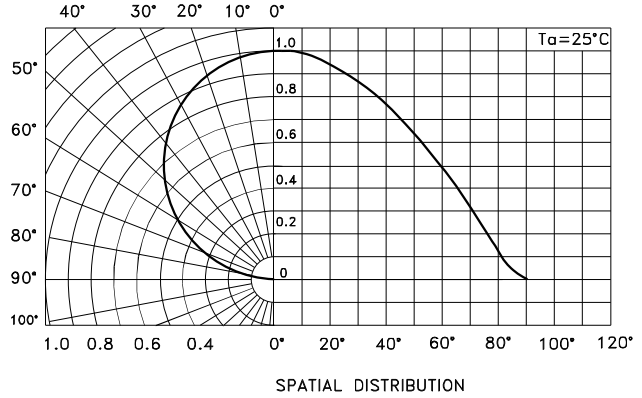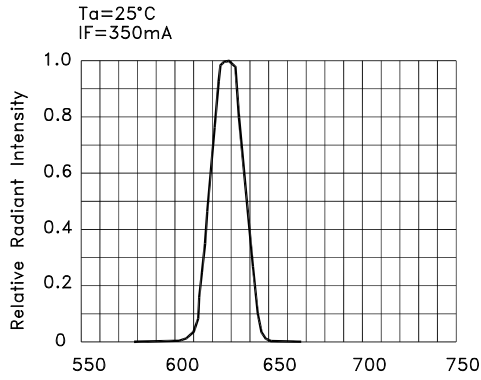

# Kingbright

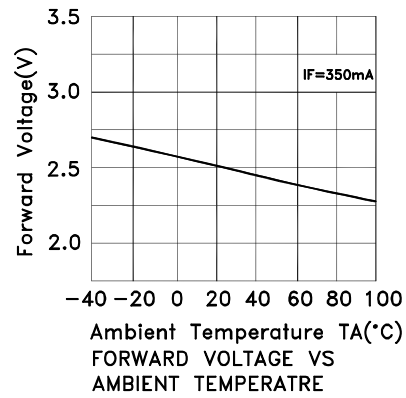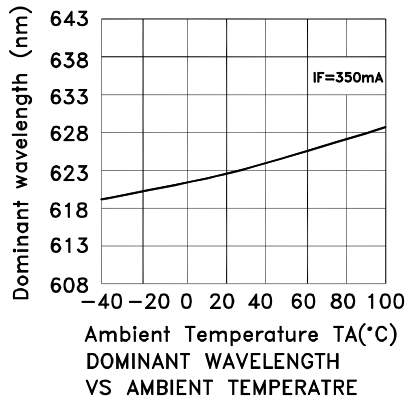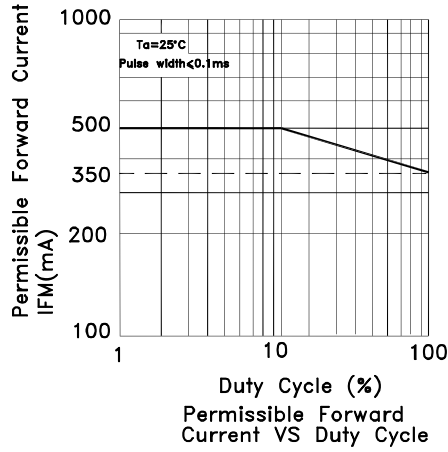


# Kingbright

## AT2520SE9ZS-350MA


Reflow soldering is recommended and the soldering profile is shown below.  
 Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

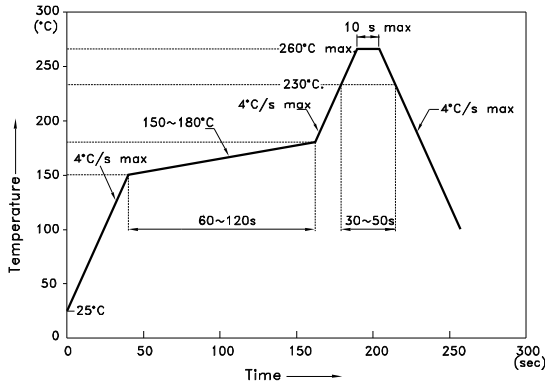


- NOTES:
1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
  2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
  3. Number of reflow process shall be 2 times or less.

### Reel Dimension

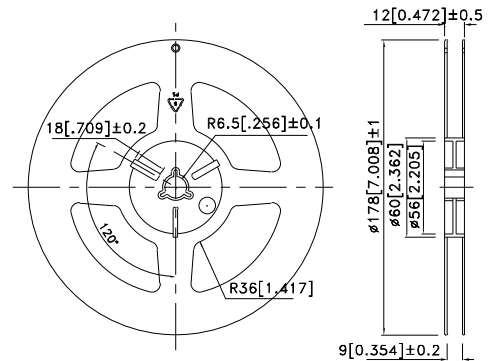


### Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

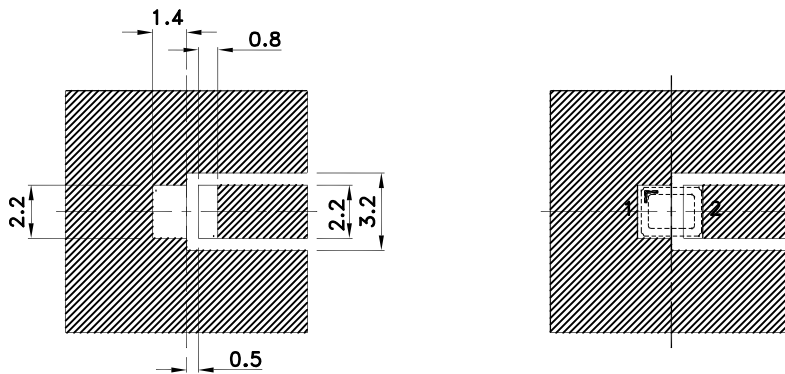

Solder resist



### Tape Specifications (Units : mm)

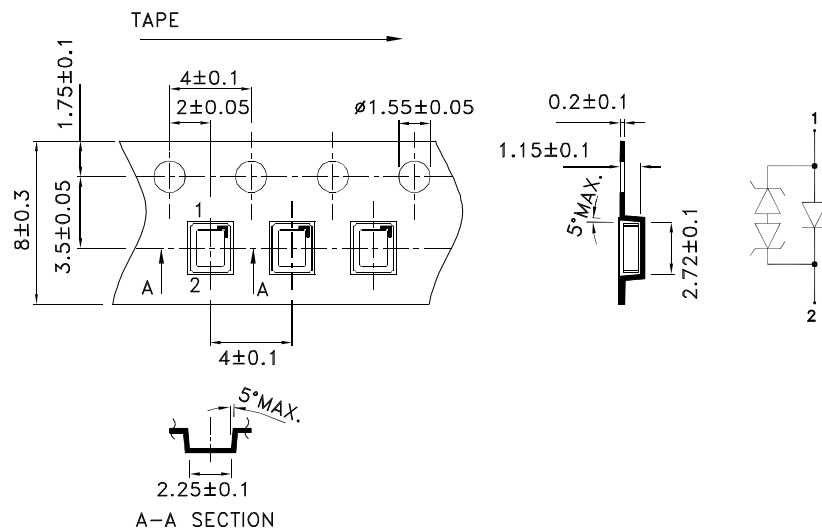

# Kingbright

## PACKING & LABEL SPECIFICATIONS

## AT2520SE9ZS-350MA

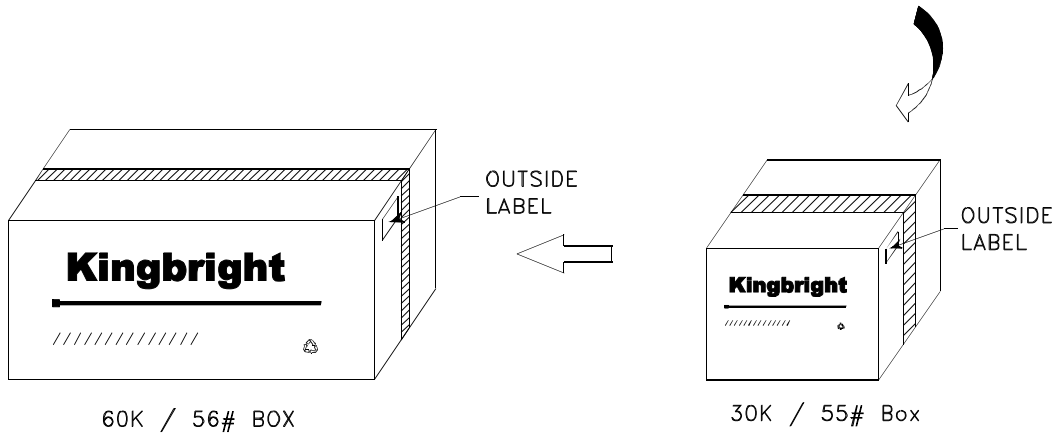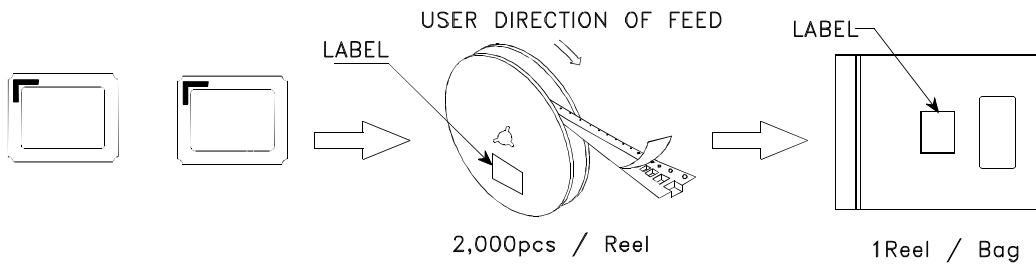

# Kingbright

---

P/N/O: AT2520xxx

---


QTY: 2,000 pcs      Q.C. Q C  
xx-xx-xxxx  
PASSED

S/N: XXXX

CODE: XXX

---

LOT NO:



xx

RoHS Compliant