

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Hammond Manufacturing](#)
[1760H](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

1760H

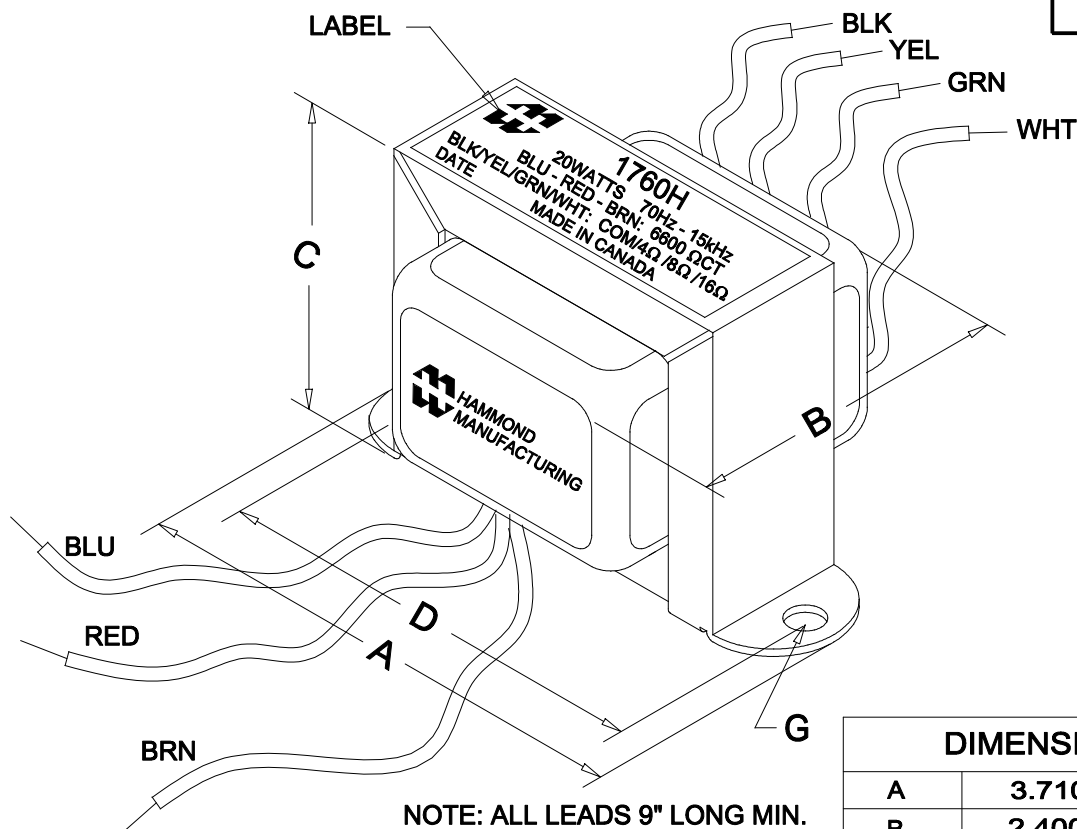

DIMENSIONS:

A	3.710" ±0.063
B	2.400" ±0.125
C	2.308" ±0.063
D	3.130" ±0.063
G	0.187" ±0.015

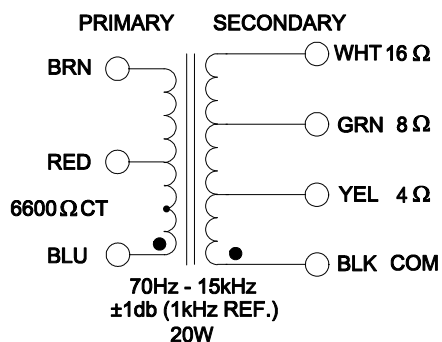

ELECTRICAL DATA:

Turns ratio:	4 ohm (40.62:1) , 8 ohm (28.72:1) , 16 ohm (20.31:1)
Inductance	@ 250V, 60Hz =>94.74H (Open circuit)
DCR	@ 20°C, BLU - BRN = 347.8 Ω ±20%
	@ 20°C, BLK - YEL = 0.686 Ω ±20%
	@ 20°C, BLK - GRN = 1.157 Ω ±20%
	@ 20°C, BLK - GRN = 0.803 Ω ±20%
FREQ. RESP	@ 20W, 70Hz - 15kHz = BLU - BRN ±1dB (1kHz Ref.)
Pri. Impedance	6600 Ω (363.3V)
Sec. Impedance	4/8/16 Ω (8.944V/12.65V/17.89V)
Power	20 WATTS



**HAMMOND
ELECTRONICS**

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE

1760H

1760H

			DR BY B.Pervaiz
0	08/08/13	Released	D.H. DATE 08/25/09
NO	DATE	REVISION	DIM IN(X)MM()