

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3102E28-11PWF80](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

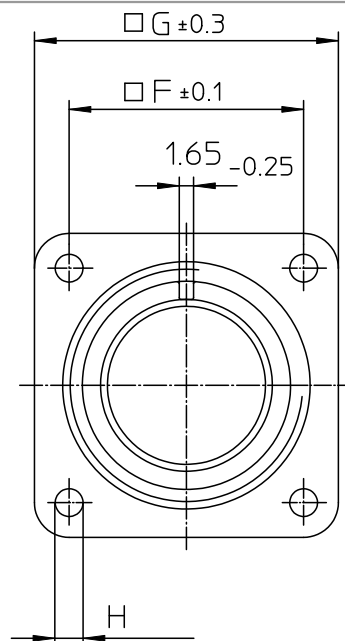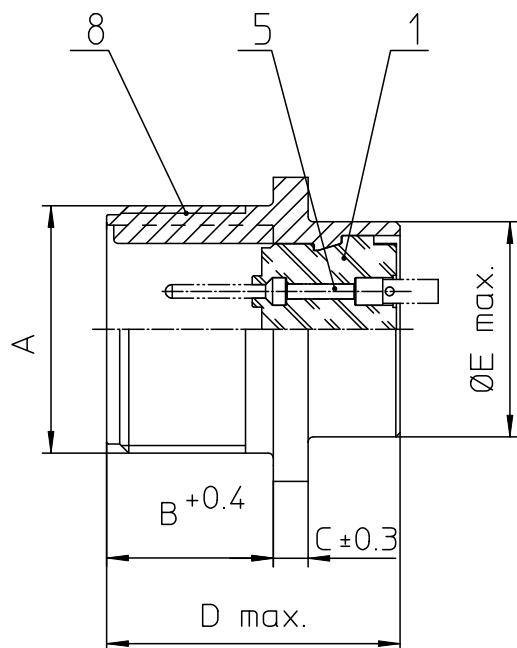

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 1 3/4-18NS-2A     |
| B   | 20.6              |
| C   | 4                 |
| D   | 34.2              |
| E   | 41.2              |
| F   | 39.7              |
| G   | 50.8              |
| H   | 3.7               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |



|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |
| Material Specification:                                                                            |
| Shell Material: Aluminium alloy                                                                    |
| Shell Plating: Olive drab chromate coating over cadmium plating                                    |
| Insulator Material: Neoprene                                                                       |
| Contact Material: Copper alloy                                                                     |
| Contact Plating: Hard silver                                                                       |

|                                                                                                                                                                                                   |                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                 | drawing for<br>CUSTOMER                                                                          |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GMBH<br/>D-71364 Vöhringen/Germany</small> | description CA3102E28-11PW-F80<br>Box mounting receptacle<br><br>AWG Crimp / Pin / Layout: 28-11 |
| <small>© All rights reserved. Reproduction or use in any form without prior written permission of ITT Cannon</small>                                                                              | page 1/1<br>revision 377.3, Jul 16                                                               |