

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Comair Rotron](#)
[19031101A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SPECIFICATIONS



Model Number: WT12B3
Part Number: 19031101A

March 29, 2005

Mechanical Drawing:

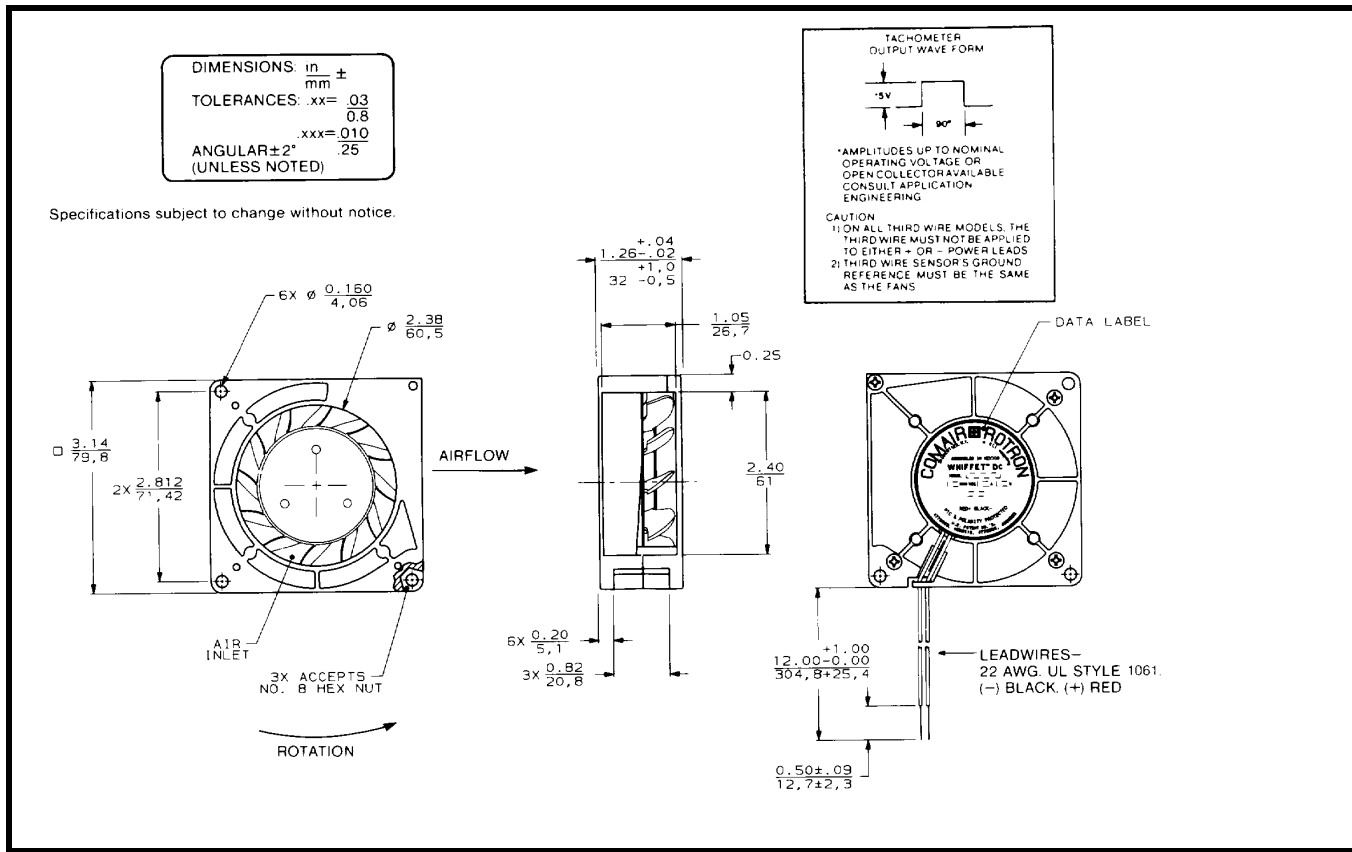

Motor:

Nominal Voltage = 12 vdc
Operating Voltage Range = 6 - 14 vdc
Nominal Running Current = 0.420 amps
Max. Locked Rotor Current = 1.12 amps
Running Power = 5.0 watts
Average Speed = 4050 rpm
Bearings = Ball
Air Flow = 15 cfm
Acoustic = 51.4 dBA

Construction:

Venturi: Plastic, Black, UL 94V-0
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 80,000 hours at 25°C.

Additional Features:

Brushless DC motor
Locked Rotor Protection
Polarity Protected
Automatic Restart Capability
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22 AWG, UL 1061
Red = Power (+)
Black = Return (-)

Agency Approvals:

UL, cUL, CE