

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132332](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	07/16/01	INITIAL RELEASE

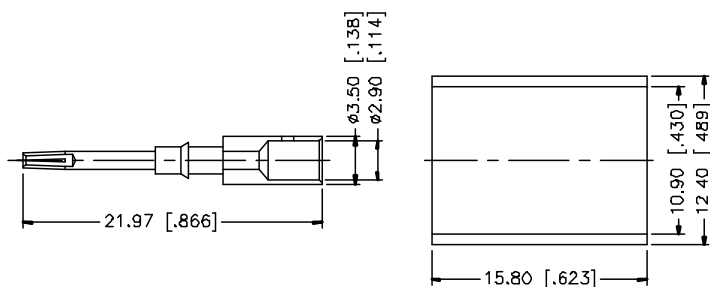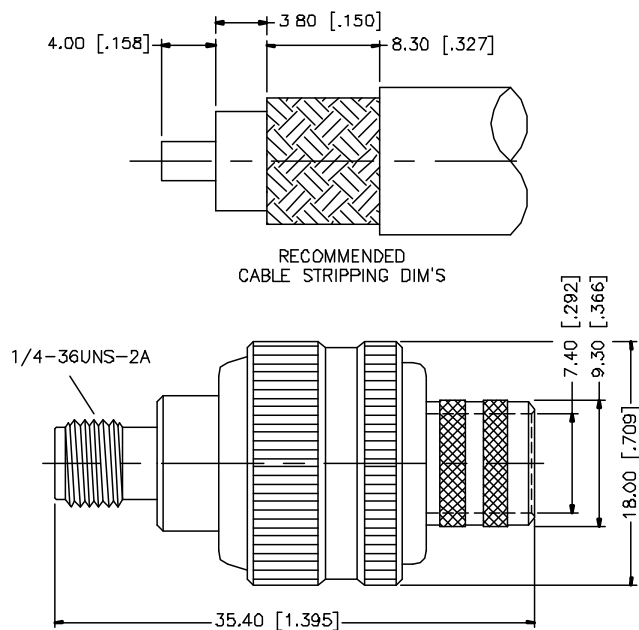

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.					07/16/01	
2	INSULATOR	TEFLON	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:- 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	CHECKED		TITLE SMA CRIMP JACK (FOR BELDEN 9913, 9914, LMR-400)					
3	CONTACT PIN	BRASS	GOLD		ISSUED							
4	FERRULE	COPPER	GOLD				SIZE	FSCM NO.	DWG. NO	REV		
5							A	99001	132332.DWG	NC		
6												
7												
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	132332	SHEET	1 OF 1