| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|---|---|---|---|---|
| 1 | 50-00430 | Connector, USB AB mini receptacle | 1 | |
| 2 | 50-00428 | Connector, USB A micro male | 1 | |
| 3 | 30-00099 | Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white | 1 | |
| 4 | 24-00059 | Overmold, PVC, white | 1 | |
| 5 | 24-00064 | Overmold, PVC, white | 1 | |
| 6 | Label 773 | Adhesive, flag, 15x65 mm | 1 | |

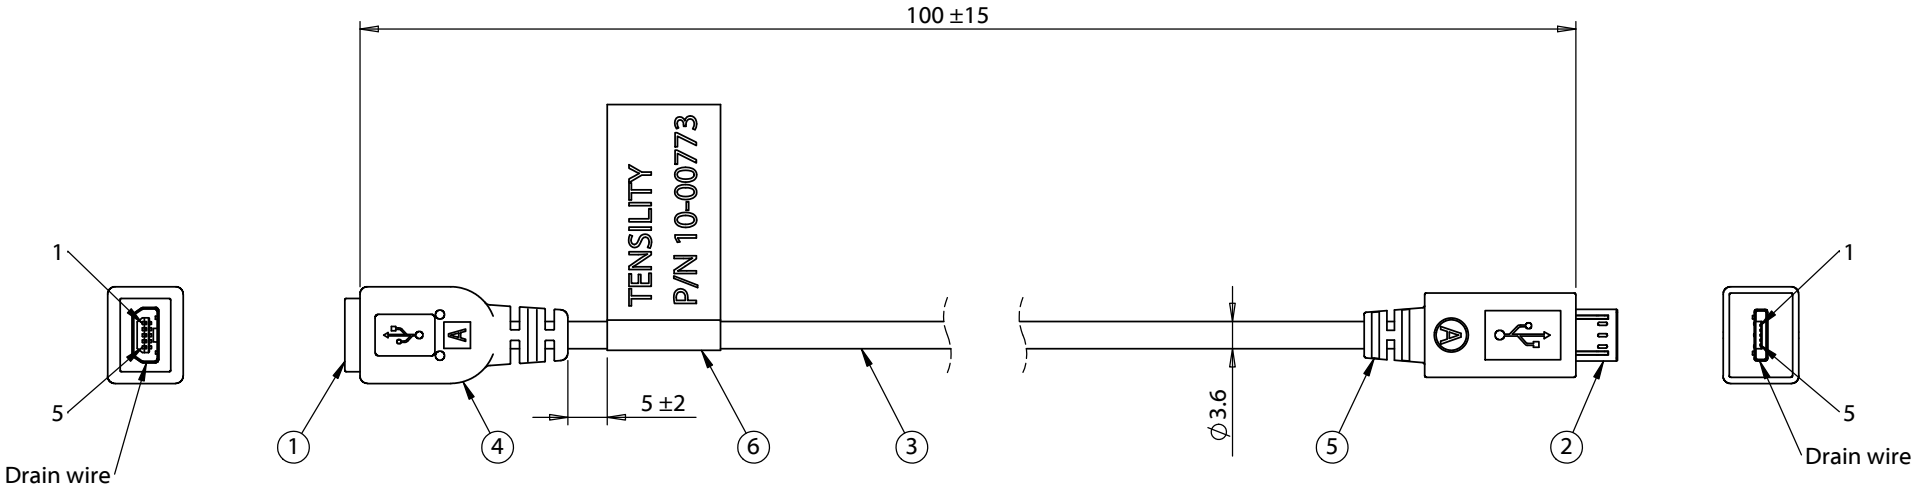


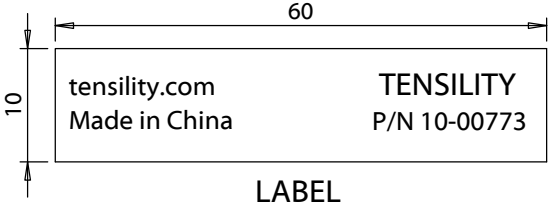


LABEL

**Notes:**
Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

| Wiring diagram | | |
|---|---|---|
| 50-00430 | Wire Color | 50-00428 |
| 1 | Red | 1 |
| 2 | White | 2 |
| 3 | Green | 3 |
| 5 | Black | 4 & 5 |
| Shell | Drain & Shield | Shell |

| Revision: | Date: | Description: |
|---|---|---|
| A | 9/21/2011 | Initial release |
| A1 | 1/29/2014 | Corrected shield type |
| | | |
| | | |
| | | |

Prepared: GL 2016.04.29 14:39:19 -07'00'

Verified: LA

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 100 mm, mini USB A receptacle to USB micro A male, 28 AWG, 30-00099 wire, white


TENSILITY

*tel* 1.541.323.3228 *800* 877.670.7118
*fax* 1.541.323.4202 *web* tensility.com


Size: A

Part number: 10-00773

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1