

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[750-10010-00300](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

UNIT:mm


4

3


2

1

3000±50

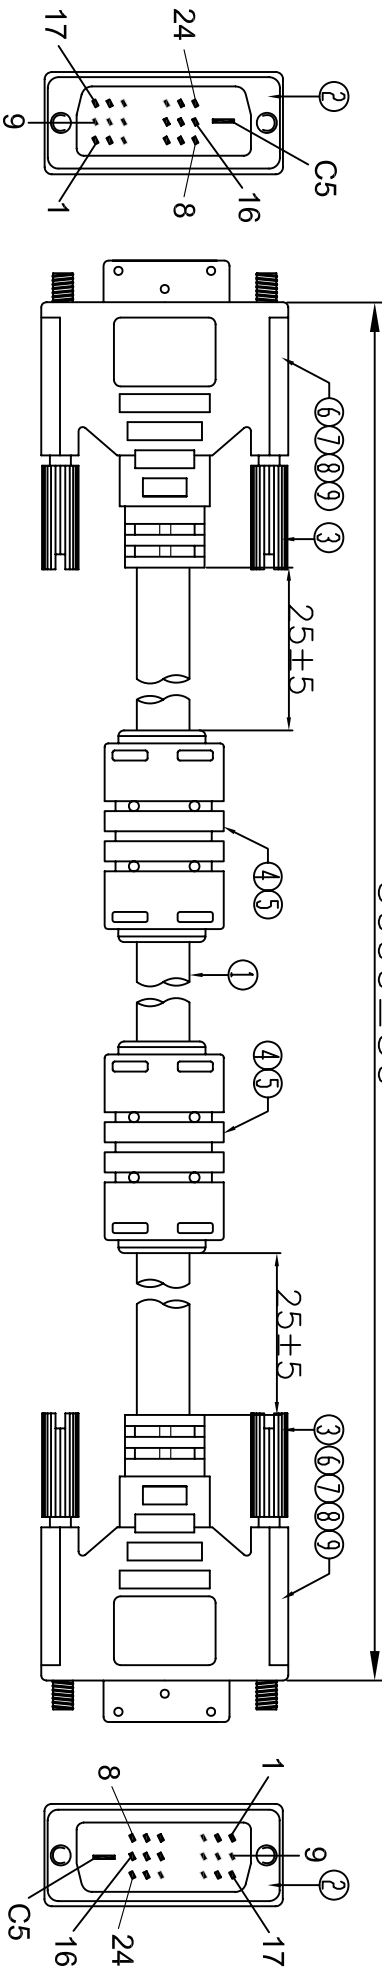


P1



Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:2 ohm max.
3.Insulation Resistance:10M ohm min.
4.Hi-Pot:300V DC/10ms
5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

P2



B

⑧	TUBE	8	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm
		8	HEAT SHRINK TUBE BLACK OD1.0mm L=15mm
		2	HEAT SHRINK TUBE BLACK OD0.8mm L=25mm

⑦	Copper	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
	IN JACKET	6g	CLEAR PE(NM-15)

⑥	OUT JACKET	30g	WHITE(EC-005) PVC 50P(WM-17)
⑤	OUT JACKET	20g	BLACK PVC 45P (CH-002)

④	FERRITE	2	Core:RH17.5*10.6*28.5mm
③	SCREW	4	SCREW #4*40UNS Ø2.8*1.32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS

②	CONN	2	DVI MALE 18+1 INSULATION BLACK,SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(28AWG/1P+DW+AL/MY)*4C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BLACK OD:7.0±0.15mm L=3000±20/-0mm.

NO.	NAME	Q'TY	SPECIFICATION
-----	------	------	---------------

CNC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	750-10010-00300
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	



4

3

2

1