

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Martel Electronics](#)

[DPM950](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DPM 950

3½ Digit LCD Module

Very low current consumption results in a long battery life and makes the DPM 950 ideal for portable equipment. For low light viewing, a long life LED backlight is fitted. The meter is housed in a robust carrier which can be bolted in place or panel mounted using the bezel, window and clips provided.

- 19mm (0.75") Digit Height
- IDC Interface
- Auto-zero
- Auto-polarity
- 200mV d.c. Full Scale Reading (F.S.R.)
- LED Backlight
- Single Rail Version
- Alarm Annunciator



SCALING

Two resistors Ra and Rb may be fitted in order to alter the full scale reading (F.S.R.) of the meter - see table. The meter will need re-calibration.

Required F.S.R.	Ra	Rb
2V Note	910k	100k
20V Note	1M	10k
200V Note	1M	1k
2kV Note	1M	100R
200µA	LINK	1k
2mA	LINK	100R
20mA	LINK	10R
200mA	LINK	1R

NOTE

Ensure that Link 10 is open if fitting Ra.

Standard Meter Single Rail Version		Stock Number DPM 950 DPM 950S		
Specification		Min.	Typ.	Max.
Accuracy (overall error) **		0.05	0.1	% (± 1 count)
Linearity			± 1	count
Sample rate		3		samples/sec
Operating temperature range		0	50	°C
Temperature stability		100		ppm/°C
Supply voltage (V+ to V-)	DPM 950	7.5	9	14
	DPM 950S	3.5	5	6.5
Supply current	DPM 950	150		µA
(not including backlight)	DPM 950S	500		
Backlight current *		50		mA
Input leakage current (Vin = 0V)		1	10	pA




* Supply voltage 5V nom.

** To ensure maximum accuracy, re-calibrate periodically.



CONNECTOR SOURCING GUIDE

METHOD Cable Mounting IDC Supplied With Product

DIMENSIONS All dimensions in mm (inches)

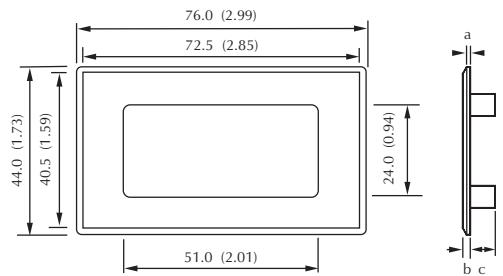

Panel cut-out 72 x 40 (2.83 x 1.57)
Maximum panel thickness 3mm (0.12).

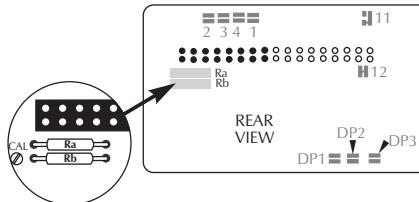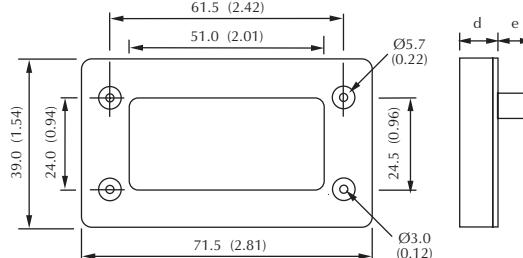

ON BOARD
SOLDER LINKS
SCALING RESISTORS

PIN FUNCTIONS

1. LP- Negative power supply to LED backlighting.
 2. LP+ Positive power supply to LED backlighting.
 3. V- Negative power supply connection.
 4. V+ Positive power supply connection.
 5. -5V Output from negative rail generator circuit. This output is an inversion of V+ (DPM 950S only).
 6. TEST Connect to V+ to display all segments except DPs. It should not be operated for more than a few seconds as the D.C. voltage applied to the LCD may 'burn' the display. This pin is normally at 5V below V+ and is the ground for the digital section of the meter. It can be used to power external logic up to a maximum of 1mA.
 7. IN LO Negative measuring differential input. Analogue inputs must be no closer than 1V to either positive or negative supply. The negative supply of the DPM 950S is generated internally and mirrors the positive supply voltage.
 8. IN HI Positive measuring differential input.
 9. COM Ground for the analogue section of the A/D converter, it is actively held at approximately 2.8V below V+ and must not be allowed to sink excessive current (>100 μ A) by, for instance, connecting to a higher voltage.
 11. REFL0 Negative input for reference voltage. Can be connected to COM via link 3.
 12. REFH1 Positive input for reference voltage. Connected via link 1 to internal reference.
 13. XDP Annunciator Drive Waveform, this is an inversion of the backplane.
 14. DP1 199.9
 15. DP2 19.99 Connect to V+ to display required Decimal Point or short corresponding DP link.
 16. DP3 1.999
 18 & 32. BP LCD backplane drive waveform.
 23. REF- Negative output from internal reference.
 24. REF+ Positive output from internal reference.
 25. LO BAT Used to control the low battery annunciator externally, cut link 12 and take to V+ to turn on annunciator. The annunciator turn on point can also be set by adjusting the BAT potentiometer (R10), in which case do not connect to this pin and leave link 12 intact.
 26. REF BG Output from internal bandgap reference. (Factory fitted option.)
 27. Δ Alarm annunciator, cut link ALM and take to XDP to display.
 28. : Colon annunciator, cut link COL and take to XDP to display.
 29. - Polarity annunciator, connected via link 11 to polarity output of IC1. Cut link 11 and either take to XDP to display or make other side of link 11 to hold off.
 30. POL Polarity output of IC1.
 31. CLK May be used to override the internal oscillator and control the sample rate. Link 14 must then be made.


Only Pins 1-16 are fitted, these functions are available but a connector is not provided.

SAFETY


To comply with the Low Voltage Directive (LVD 93/68/EEC), input voltages to the module's pins must not exceed 60Vdc. If voltages to the measuring inputs do exceed 60Vdc, then fit scaling resistors externally to the module. The user must ensure that the incorporation of the DPM into the user's equipment conforms to the relevant sections of BS EN 61010 (Safety Requirements for Electrical Equipment for Measuring, Control and Laboratory Use).

VARIOUS OPERATING MODES


ON-BOARD LINKS: In order to quickly and easily change operating modes for different applications, the meter has several on-board links. They are designed to be easily opened (cut) or shorted (soldered). Do not connect more than one meter to the same power supply if the meters cannot use the same signal ground. Taking any input beyond the power supply rails will damage the meter.



Check Links 2 & 3 are SHORTED.
Measuring a floating voltage source of 200mV full scale.




Check Links 2 & 3 are SHORTED.
Measuring current. Supply MUST be isolated.




Check Link 3 is SHORTED.

Split rail supply (DPM 950)




Check Links 1 & 4 are OPEN.
Measuring a single ended input referenced to supply (DPM 950S).
Reading = 1000 V₁/V₂
50mV < V₂ < 200mV V₁ < 2V₂



Check Link 3 is SHORTED.

Measuring the ratio of two voltages.



Check Link 3 is SHORTED.
Measuring 4-20mA to read 0-999 (supply MUST be isolated).