

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)

[0040062013](#)




For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:
 1. THIS GROUND CLIP CRIMPS TO #14- #18 AWG WIRE WITH .031(.79) THICK INSULATION, SEE CHART, AND IS INTENDED FOR USE ONLY AS A SECONDARY GROUND.

MATERIAL:
 STEEL, STAINLESS, TYPE 301,
 .020(.51) THICK.

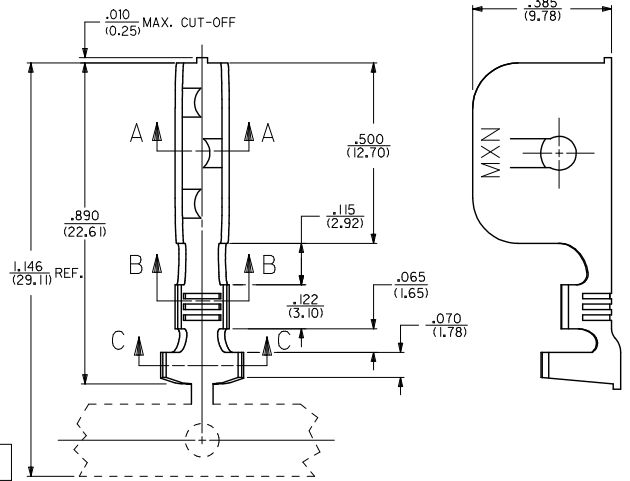

040-06-2015	42172-BB1	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	14 AWG	(2) #16 AWG
040-06-2014	42172-AA1	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	14 AWG	
050-29-1597	42172-H1	.035/(0.89)	.17/(4.3)	.045/(1.14)-.060/(1.52)	18-16 AWG	(2) #18 AWG OR (1) #18 & (1) #16
040-06-2017	42172-F1	.015/(0.38)	.15/(3.8)	.020/(0.51)-.030/(0.76)	18-16 AWG	
040-06-2013	42172-C1	.050/(1.27)	.17/(4.3)	.060/(1.52)-.075/(1.91)	18-16 AWG	
040-06-2005	42172-B1	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	18-16 AWG	
040-06-2003	42172-A1	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
040-06-2024	42172-G1	.004/(0.10)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
PART NO.	ENG. NO.	DIM. "D"	DIM. "E"	PANEL THICKNESS RANGE	WIRE GAGE	DOUBLE WIRE COMBINATION

MOVE DIM E REC NO: UCP2015-5495 DRAWN: JOMIT 2015/06/23 CHKD: KATIPER 2015/06/23 APPROV: SMITH 2015/06/30	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± .014 0 PLACE ± ±	DIMENSION STYLE IN/MM	SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		MATERIAL NO. SEE CHART	DOCUMENT NO. SD-42172-**	SHEET NO. 1 OF 1			
		ANGULAR ± 1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					