

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0561218628](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

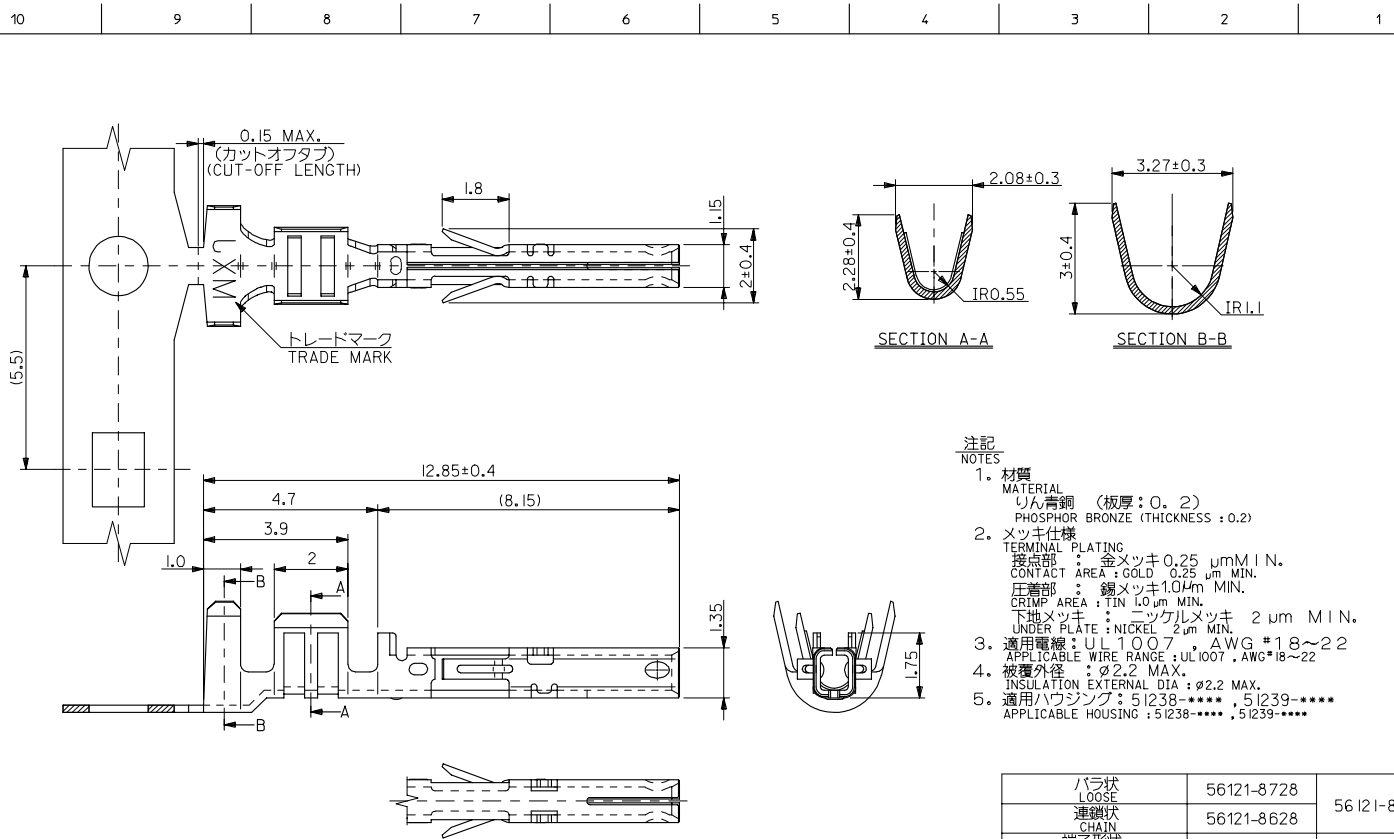

注記
NOTES

- 材質
りん青銅 (板厚: 0.2)
PHOSPHOR BRONZE (THICKNESS: 0.2)
- メッキ仕様
TERMINAL PLATING
接点部: 金メッキ 0.25 μ m MIN.
CONTACT AREA: GOLD 0.25 μ m MIN.
圧着部: 銅メッキ 1.0 μ m MIN.
CRIMP AREA: TIN 1.0 μ m MIN.
下地メッキ: ニッケルメッキ 2 μ m MIN.
UNDER PLATE: NICKEL 2 μ m MIN.
- 適用電線: UL1007, AWG #18~22
APPLICABLE WIRE RANGE: UL1007, AWG #18~22
- 被覆外径: ϕ 2.2 MAX.
INSULATION EXTERNAL DIA: ϕ 2.2 MAX.
- 適用ハウジング: 51238-****, 51239-****
APPLICABLE HOUSING: 51238-****, 51239-****

バラ状 LOOSE	56121-8728	56121-8***
連鎖状 CHAIN	56121-8628	
端子形状 TERMINAL CONFIGURATION	MATERIAL NO.	MODEL NO.
GENERAL TOLERANCES (UNLESS SPECIFIED)	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
10 UNDER ± 0.2	DRAWN BY Y. AOYAGI	DATE 2005/02/28
10 OVER 30 UNDER ± 0.25	CHECKED BY M. TANAKA	DATE 2005/02/28
30 OVER ± 0.3	APPROVED BY N. UKITA	DATE 2005/02/28
ANGULAR $\pm 3^\circ$	MATERIAL NO.	DOCUMENT NO.
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	SD-56121-004
SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	