

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[0877620024](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

10 9 8 7 6 5 4 3 2 1

PART NUMBERS	CKT SIZE	PEG	VOID POSITION	DIMENSION			PACKAGING TYPE
				A	B	C	
87762-0024	12	YES	----	11.90	10.00	8.00	WITHOUT CAP IN TUBE
87762-0025	12	YES	----	11.90	10.00	8.00	WITH CAP IN TUBE
87762-0600	06	NO	----	5.90	4.00	-	WITHOUT CAP IN TRAY



NOTES:




- MATERIAL:
HOUSING: NYLON, GLASS-FILLED, UL94V-0,
COLOR: BLACK
PIN: COPPER ALLOY, SQ. 0.5mm
- PLATING FINISH:
15μm MIN GOLD PLATE IN SELECTED AREA AND
75μm MIN TIN ON SOLDER TAIL OVER
50μm MIN NICKEL UNDERPLATE OVERALL.

⚠️ COPLANARITY IS TO BE MEASURED BY RESTING THE SOLDER TAIL ON A GAUGE SURFACE

⚠️ CAP TO BE LOCATED AS CENTRAL OF PART AS POSSIBLE

- TUBE LENGTH : 560mm REF.
- THE ABOVE BKTS SHOWN IS FOR ILLUSTRATION ONLY.
- PACKAGING TYPE: PLS REFER TO TABLE
- PRODUCT SPEC PS-87761-100 APPLIES
- WAFER TO BE FLAT WITHIN 0.003mm/mm
- RECOMMENDED PCB THICKNESS IS 1.60mm

11.PACKAGING SPECIFICATION:
TUBE: PK-89990-474
TRAY: PK-89990-487

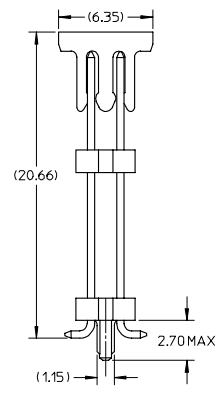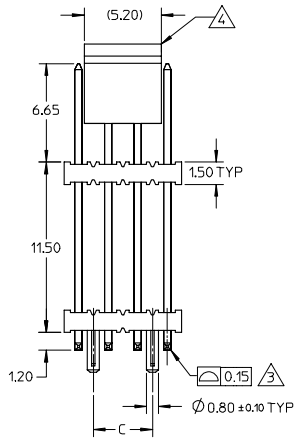

QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	mm	INCH	MM ONLY	NTS	METRIC	
	4 PLACES ± ---	± ---	DRAWN BY	DATE	TITLE	SALES DRAWING MGRID, 2MM PITCH, HEADER DUAL ROW, D/W W PEG, SMT MOLEX INCORPORATED
	3 PLACES ± ---	± ---	KCHO	2004/08/16		
2 PLACES ± 0.20	± ---	CHECKED BY	DATE			
1 PLACE ± ---	± ---	PTL IM	2004/08/17			
ANGULAR ± 3 °		APPROVED BY	DATE			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SLOW	2004/08/18	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
		SEE TABLE			SD-87762-058	1 OF 1

10 9 8 7 6 5 4 3 2 1