

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2261054](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## SKBI 32/D

Order No.: 2261054



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

Plug-in card block, Nominal current: 4 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 32, Connection type: Screw connection, Color: green

Commercial data	
EAN	4017918053826
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.186 KG
Catalog page information	Page 523 (CC-2009)

### Product notes

WEEE/RoHS-compliant since:  
06/08/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

Dimensions / positions	
Length	43 mm
Height	138 mm
Width	112 mm
Pitch	5.08 mm

SKBI 32/D Order No.: 2261054

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

Number of positions	32
Hole diameter	4.2 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

**Technical data**

Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Stripping length	8 mm

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

**Certificates / Approvals**



Certification GOST

**Accessories**

Item	Designation	Description
2261009	SF-SKBI 31/32	Snap foot, for horizontal or vertical mounting of the SKBI plug-in card blocks, on the NS 35/7.5 DIN rail


**Assembly**

SKBI 32/D Order No.: 2261054

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

## Diagrams/Drawings


Dimensioned drawing

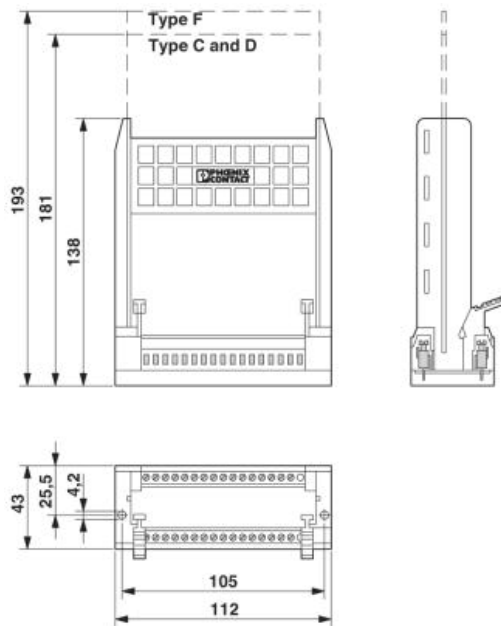

SKBI 32/D Order No.: 2261054

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

Schematic diagram

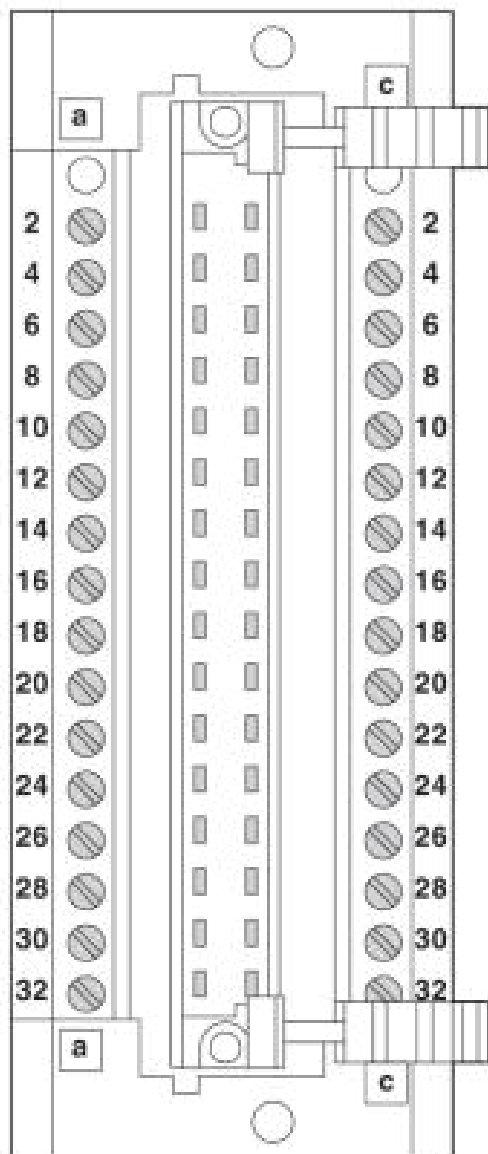

SKBI 32/D Order No.: 2261054

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;