

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Molex Connector Corporation](#)

[1201140064](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	MATERIAL CABLE	CABLE COLOR
1201140062	BTY801N-FBE-10	32.81' +12.50' -0 [10.0M +317.5 -0]	PVC	YELLOW
1201140063	BTY801N-FBE-20	65.62' +24.50' -0 [20.0M +622.3 -0]	PVC	YELLOW
1201140064	BTY801N-FBP-05	16.40' +6.50' -0 [5.0M +165.1 -0]	PUR, HIGH FLEX	BLACK

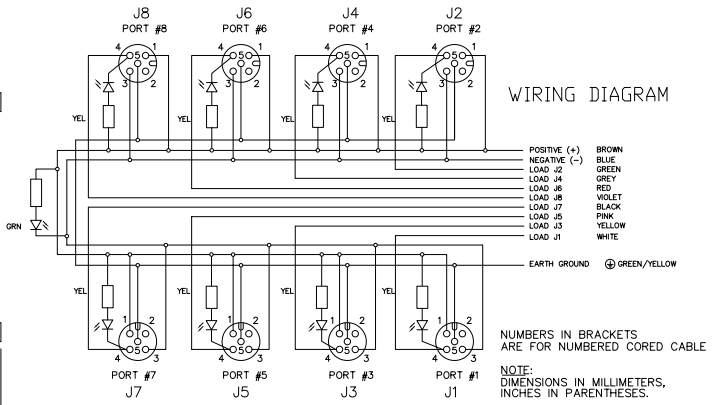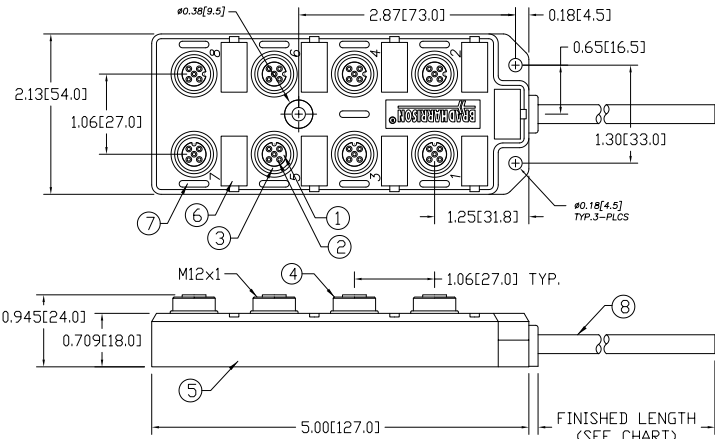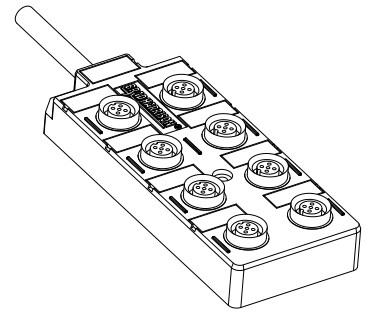

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR
8	CABLE, 18AWG, 3 CONDUCTOR, 22AWG, 8 CONDUCTOR, 300V	SEE TABLE	SEE TABLE

<b>ADD 2 PINS TO TABLE</b> EC NO: WEL2010-0441 DRAWN: BRAUCH 2010/03/17 CHKD: FP APPR: FPACHER 2010/03/19 DESCRIPTION: MICRO-CHANGE MPIS 8 PORT TOP MOUNT NPN #18/3 + #22/8 CABLE REV: 1	<b>QUALITY SYMBOL</b> ▽=0 ▽=0	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b> 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±--- 1 PLACE ±0.3 ±.01 ANGULAR ±---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE: IN/MM SCALE: NTS DESIGN UNITS: METRIC THIRD ANGLE PROJECTION	DRAWN BY: BBRAUCH 2010/03/17 CHECKED BY: FP 2010/03/17 APPROVED BY: FPACHER 2010/03/18 MATERIAL NO.: SEE CHART SIZE: C	TITLE: MICRO-CHANGE MPIS 8 PORT TOP MOUNT NPN #18/3 + #22/8 CABLE MOLEX INCORPORATED DOCUMENT NO.: SD-120114-061 SHEET NO.: 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				