

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bourns Inc.](#)
[TISP7038L1DR-S](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

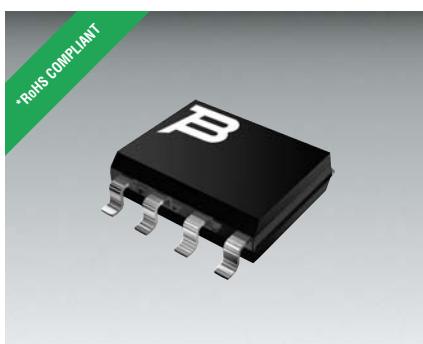
TISP7015L1, TISP7038L1
TRIPLE ELEMENT THYRISTOR OVERVOLTAGE PROTECTORS
TISP70xxL1 (VLV) Overvoltage Protectors
**Three Terminal Very Low Voltage (VLV) Protection
Ion-Implanted Breakdown Region**

Device	V _{DRM} V	V _(BO) V
'7015L1	8	15
'7038L1	28	38

Protection for Signal, Data and Control Lines

- ISDN
- T1/E1
- Ethernet
- RS232 & RS485

Low Capacitance


- '7015L1 24 pF typ.
- '7038L1 17 pF typ.

Rated for International Surge Wave Shapes


Voltage Waveshape	Standard	I _{PPSM} A
2/10	GR-1089-CORE	200
1.2/50	IEC 61000-4-5	100
10/700	TIA/EIA-IS-968 ITU-T K.20/45/21	50
10/1000	GR-1089-CORE	30

IEC 61000-4-2 Immunity Ratings

Contact	6 kV
Air	8 kV

D Package (Top View)


NC - No internal connection

Device Symbol

UL Recognized Components
Description

The TISP70xxL1 series are 3-point overvoltage protectors designed for protecting against metallic (transverse mode) and simultaneous longitudinal (common mode) impulses. Each terminal pair has the same voltage limiting values and surge current capability.

These devices are designed to limit overvoltages between signal, data and control port conductors, connected to terminals T1 and T2, and a protective ground, G. Each terminal pair has a symmetrical voltage-triggered bidirectional thyristor characteristic (Figure 1). Overvoltages are initially clipped by breakdown clamping until the voltage rises to the breakdown level, which causes the device to crowbar into a low-voltage on state. This low-voltage on state causes the current resulting from the overvoltage to be safely diverted through the device. The device holding current will normally be higher than the available short circuit d.c. system current, causing the protector to switch off as the diverted current subsides.

How To Order

Device	Package	Carrier	Order As
TISP7015L1	D (8-pin, Small-outline)	R (Embossed Tape Reeled)	TISP7015L1DR-S
TISP7038L1	D (8-pin, Small-outline)	R (Embossed Tape Reeled)	TISP7038L1DR-S

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex

JULY 2000 – REVISED JULY 2008

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

TISP70xxL1 (VLV) Overvoltage Protectors



The TISP70xxL1 is guaranteed to withstand the listed international ESD (ElectroStatic Discharge), and lightning impulses in both polarities. Terminals marked NC do not have any internal connections and may be left floating or tied to some circuit point. The TISP7038L1 is a functional replacement for the TPN3021.

Absolute Maximum Ratings, $T_J = 25^\circ\text{C}$ (Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive peak off-state voltage TISP7015L1 TISP7038L1	V_{DRM}	± 8 ± 28	V
Non-repetitive peak on-state pulse current (see Notes 1 and 2) 2/10 (Telcordia GR-1089-CORE, 2/10 voltage wave shape) 1/20 (ITU-T K.22, 1.2/50 voltage wave shape, also VDE0878) 8/20 (IEC 61000-4-5, Figure 12 generator, 1.2/50 voltage wave shape) 10/160 (TIA/EIA-IS-968 (formally FCC Part 68), 10/160 voltage wave shape) 5/310 (ITU-T K.20/21, 10/700 voltage wave shape, also IEC 61000-4-5 and VDE0433) 10/560 (TIA/EIA-IS-968 (formally FCC Part 68), 10/560 voltage wave shape) 10/1000 (Telcordia GR-1089-CORE, 10/1000 voltage wave shape)	I_{PPSM}	200	A
		100	
		100	
		75	
		50	
		40	
		30	
Non-repetitive peak on-state current (see Note 1) 16.7 ms (60 Hz) full sine wave 20 ms (50 Hz) full sine wave 0.2 s 50 Hz/60 Hz a.c. 2.0 s 50 Hz/60 Hz a.c.	I_{TSM}	9	A
		8	
		3	
		1.5	
Junction temperature	T_J	-40 to +150	°C
Storage temperature range	T_{stg}	-65 to +150	°C

NOTES: 1. Initially the TISP70xxL1 must be in thermal equilibrium at the specified TA. The surge may be repeated after the TISP70xxL1 returns to its initial conditions.
 2. These non-repetitive rated currents are peak values of either polarity.

EMC Immunity Test Ratings, $T_A = 25^\circ\text{C}$ (Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Level 3 open-circuit voltage, IEC 61000-4-2, 2001-4, ESD generator, also ITU-T K.20 contact discharge air discharge	$V_{\text{O/C}}$	6 8	kV

Electrical Characteristics, $T_J = 25^\circ\text{C}$ (Unless Otherwise Noted)

Parameter	Test Conditions	Min	Typ	Max	Unit
I_{DRM} Repetitive peak off-state current	$V_D = \pm V_{\text{DRM}}$			± 4	μA
$V_{\text{(BO)}}$ Breakover voltage	$dv/dt = \pm 250 \text{ V/ms}$, $R_{\text{SOURCE}} = 300 \Omega$ TISP7015L1 TISP7038L1			± 15 ± 38	V
$I_{\text{(BO)}}$ Breakover current	$dv/dt = \pm 250 \text{ V/ms}$, $R_{\text{SOURCE}} = 300 \Omega$			± 300	mA
I_H Holding current	$IT = \pm 5 \text{ A}$, $di/dt = \pm 30 \text{ mA/ms}$	± 30			mA

TISP70xxL1 (VLV) Overvoltage Protectors



Electrical Characteristics, $T_J = 25^\circ\text{C}$ (Unless Otherwise Noted) (Continued)

Parameter	Test Conditions	Min	Typ	Max	Unit
C_{KA} Off-state capacitance	$f = 1 \text{ MHz}$, $V_d = 1 \text{ V rms}$, $V_D = 0$ (see Note 3)	TISP7015L1 TISP7038L1	24 17		pF

NOTE 3: Value for any terminal pair, three-terminal guarded measurement with zero voltage bias on the unmeasured terminal.

Thermal Characteristics

Parameter	Test Conditions	Min	Typ	Max	Unit
$R_{\Theta JA}$ Junction to free air thermal resistance	$P_{tot} = 0.8 \text{ W}$, $T_A = 25^\circ\text{C}$, 5 cm^2 , FR4 PCB			170	°C/W

TISP70xxL1 (VLV) OvervoltageProtectors

BOURNS®

Parameter Measurement Information

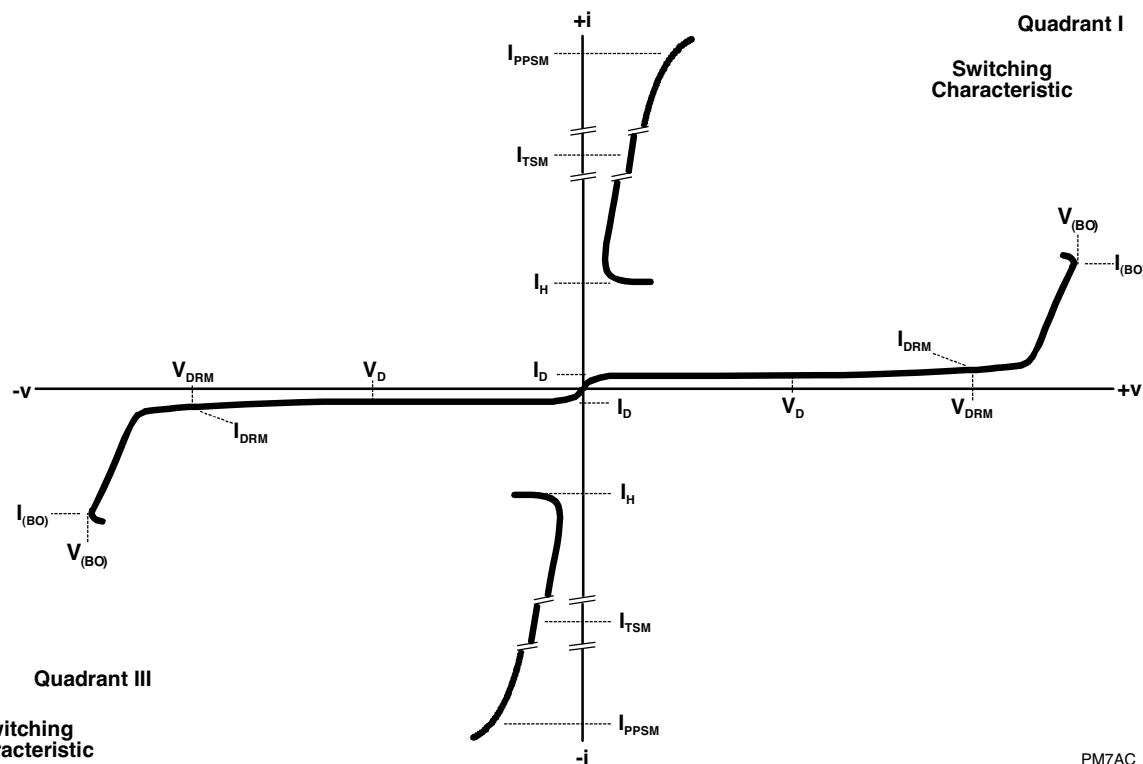


Figure 1. Voltage-Current Characteristic for any Terminal Pair

TISP70xxL1 (VLV) Overvoltage Protectors

BOURN[®]

Typical Characteristics

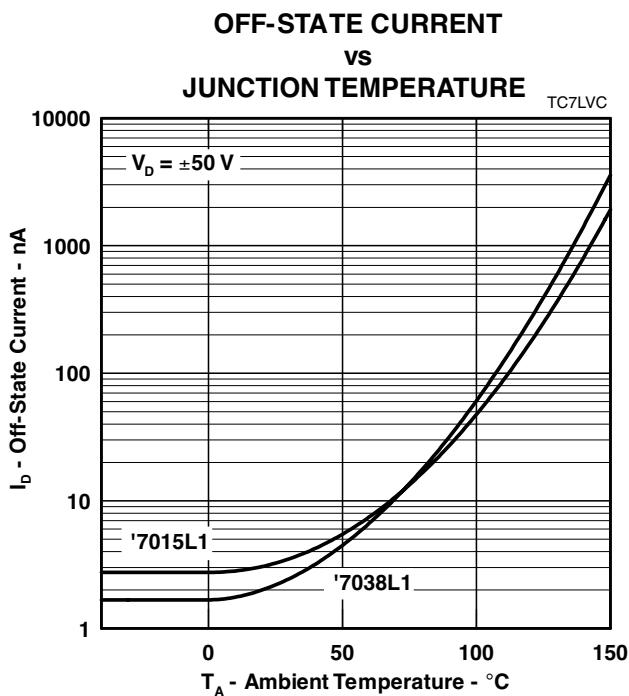


Figure 2.

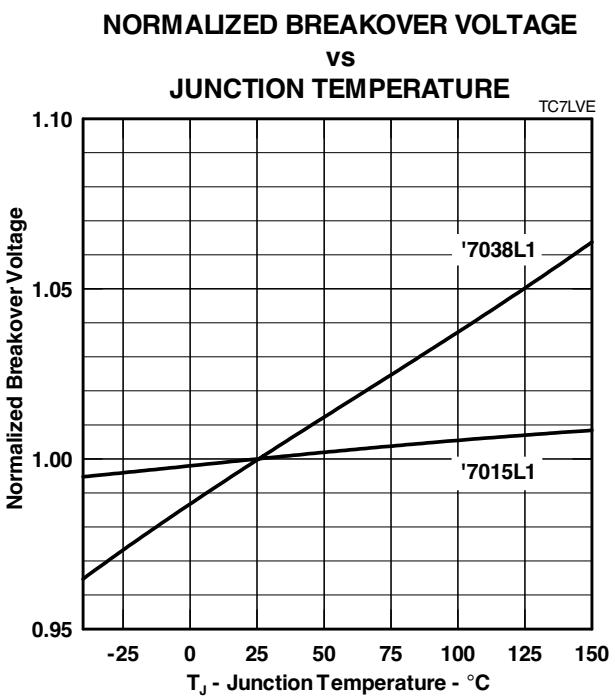


Figure 3.

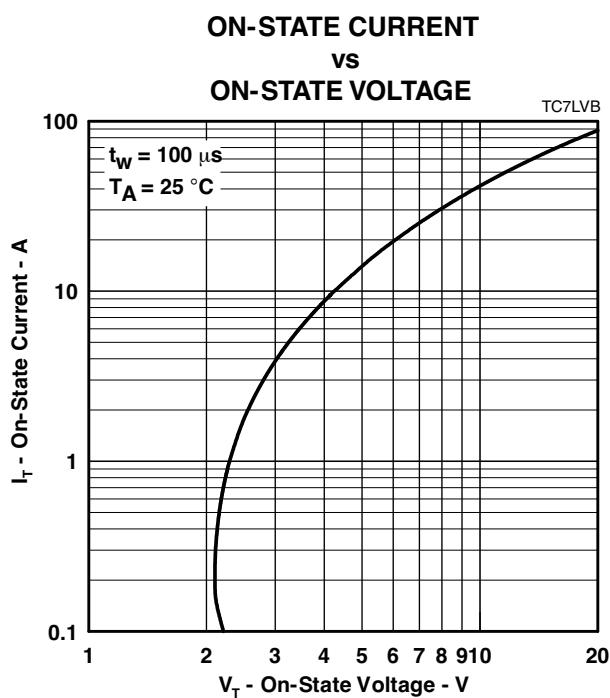


Figure 4.

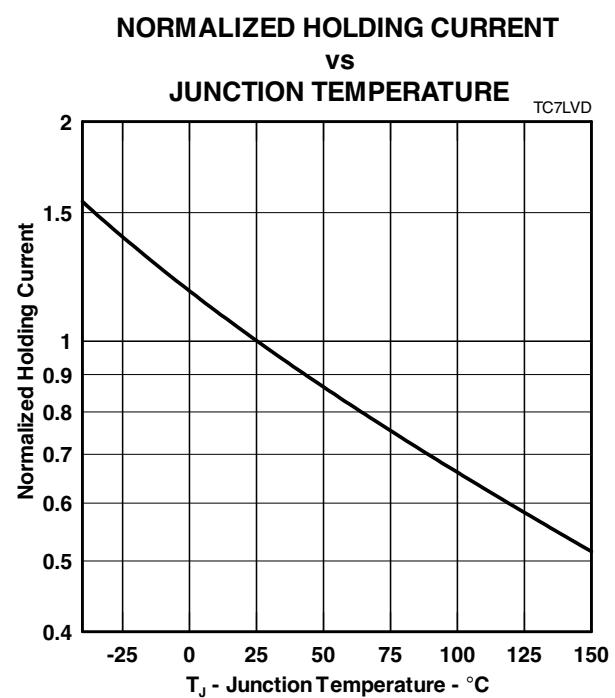
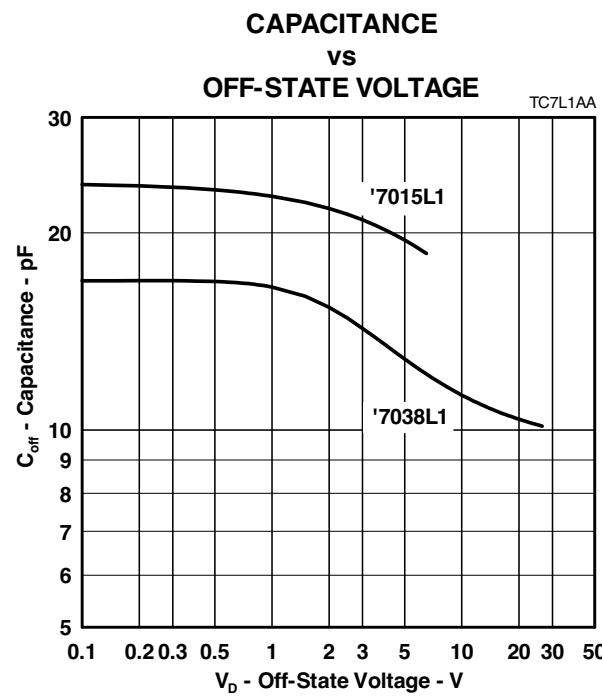


Figure 5.

TISP70xxL1 (VLV) Overvoltage Protectors**BOURN'S®****Typical Characteristics****Figure 6.**

TISP70xxL1 (VLV) Overvoltage Protectors

BOURNS®

Rating and Thermal Information

NON-REPETITIVE PEAK ON-STATE CURRENT vs CURRENT DURATION

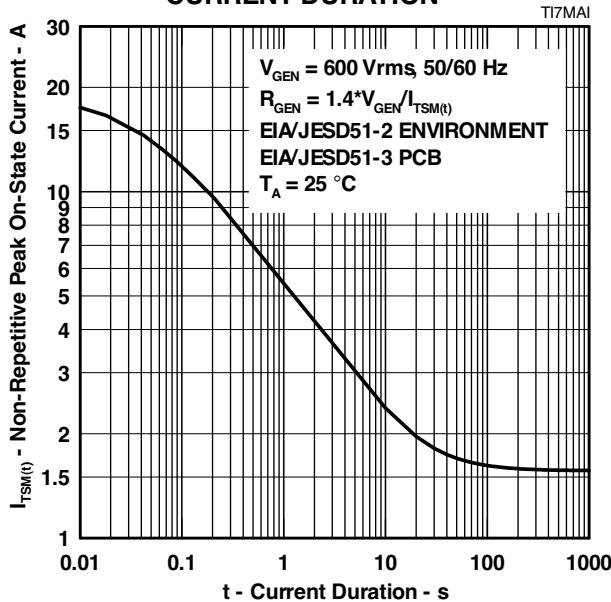


Figure 7.

V_{DRM} DERATING FACTOR

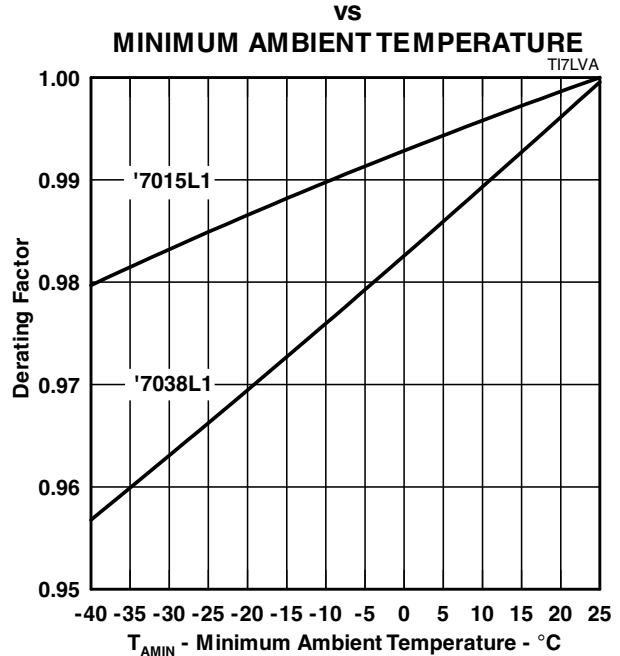


Figure 8.

TISP70xxL1 (VLV) Overvoltage Protectors**BOURNS®****MECHANICAL DATA****Device Symbolization Code**

Devices will be coded as below.

Device	Symbolization Code
TISP7015L1DR-S	7015L1
TISP7038L1DR-S	7038L1