

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[RR3112DBLKBLKNAF0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



SHEET 1 OF 1

| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | OFF    | ON     |
| 2-1               | OPEN   | 2-3    |

"A" DOT MARKING  
WHITE




ACTUATOR COLOR:  
BLACK

RECOMMENDED PANEL MOUNTING



HOUSING COLOR:  
BLACK

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE:  $x.x = \pm 0.4$   
 $x.xx = \pm 0.25$
  3. TERM. NOS. FOR REF. ONLY
  - ▲ 4. RATING: 10A 250VAC  
16A 125VAC
  5. CONTACT RESISTANCE: 50mOHM MAX.
  6. INSULATION RESISTANCE: DC 500V 100M OHM MIN.
  7. DIELECTRIC STRENGTH: AC 1500V 1 MIN
  8. OPERATING TEMPERATURE: 0°C to 65°C
  9. ▲ DENOTE CRITICAL PARAMETER
  10. 2002/95/EC (ROHS) COMPLIANT.

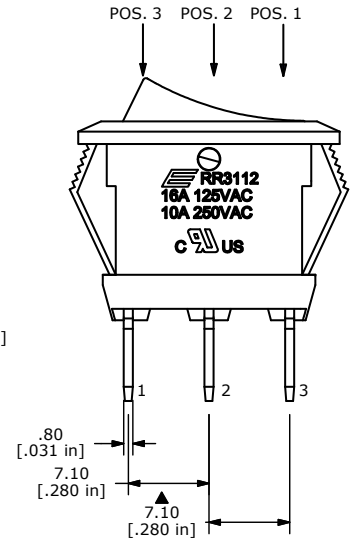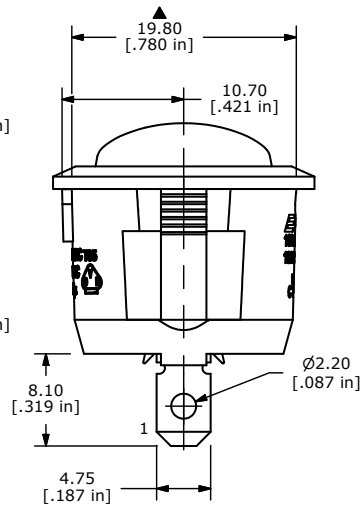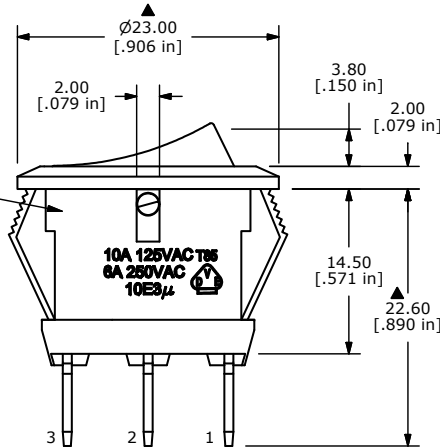

TITLE RR3112DBLKBLKNAF0

|     |        |                        |        |     |
|-----|--------|------------------------|--------|-----|
| A   | 20083  | RELEASE FOR PRODUCTION | 8/9/11 | BGL |
| REV | PCR NO | DESCRIPTION            | DATE   | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|       |     |      |          |    |     |     |         |     |   |
|-------|-----|------|----------|----|-----|-----|---------|-----|---|
| SCALE | 2:1 | DATE | 8/9/2011 | DR | BGL | DWG | F130431 | REV | A |
|-------|-----|------|----------|----|-----|-----|---------|-----|---|