

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Molex Connector Corporation](#)
[22-43-8070](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

NOTES:

1. MATERIAL : HEADER: POLYESTER, GLASS FILLED.
PIN : BRASS
2. FINISH:
.000100/(0.00254) MIN. TIN OVER
.000050/(0.00127) MIN. NICKEL UNDERPLATE.
3. PARTS CONFORM TO PRODUCT SPECIFICATION PS-42219-0001.
4. PACKAGING: SEE LEGEND.
5. KINK DIRECTION:
2 THROUGH 7 CKTS: ADJACENT PINS KINKED IN
OPPOSING DIRECTIONS.
8 THROUGH 15 CKTS: TWO END PINS ON EACH END
KINKED IN THE SAME DIRECTION.
CENTER PINS WITHOUT KINKS.
6. PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC
SPEC PS-45499-002.

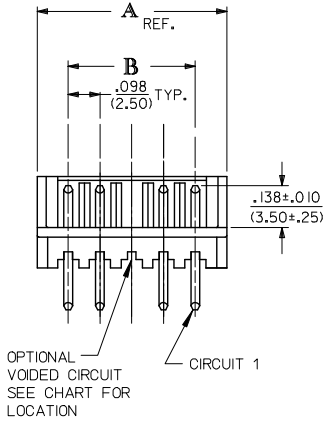

A-42267-N*-***
NO OF CKTS
HOUSING NO.
VOID LOCATION
PACKAGING METHOD
BLANK = BULK PACK PER PK-42249-0001



PCB HOLE LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062/(1.57)

ADD BULK PK SPEC	DESCRIPTION
EC NO: UCP2013-2919	
DRWN:MKIPPER 2013/01/17	
CHKD:ANDERSON 2013/01/17	
APPR:FSMITH 2013/01/29	
Q3	REV


QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.36	± ---
0 PLACE	±	±
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		


DIMENSION STYLE IN/MM	
DRAWN BY	DATE
GUZIK	01/17/89
CHECKED BY	DATE
EDGLEY	01/17/89
APPROVED BY	DATE
LENZ	01/17/89
MATERIAL NO.	
SEE CHART	
SIZE	A

SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE 2.5 MM HEADER ASSEMBLY		
molex		
DOCUMENT NO. SDA-42267-*		SHEET NO. 1 OF 4
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		


NO. OF CKTS.	KINK LOCATION	DIM. A	DIM. B
2	1,2,	.292/(7.42)	.098/(2.50)
3	1,2,3	.391/(9.92)	.197/(5.00)
4	1,2,3,4	.489/(12.42)	.295/(7.50)
5	1,2,3,4,5	.587/(14.92)	.394/(10.00)
6	1,2,3,4,5,6	.685/(17.40)	.492/(12.50)
7	1,2,3,4,5,6,7	.783/(19.90)	.591/(15.00)
8	1,2,7,8	.882/(22.40)	.689/(17.50)
9	1,2,8,9	.980/(24.90)	.787/(20.00)
10	1,2,9,10	1.079/(27.40)	.886/(22.50)
11	1,2,10,11	1.177/(29.90)	.984/(25.00)
12	1,2,11,12	1.276/(32.40)	1.083/(27.50)
13	1,2,12,13	1.374/(34.90)	1.181/(30.00)
14	1,2,13,14	1.472/(37.40)	1.280/(32.50)
15	1,2,14,15	1.571/(39.90)	1.378/(35.00)



TEMPLATE FILENAME: PRODUCT_SPEC(SIZE_A)(V.1).DOC



TEMPLATE FILENAME: PRODUCT_SPEC(SIZE_A)(V.1).DOC



TEMPLATE FILENAME: PRODUCT_SPEC(SIZE_A)(V.1).DOC