



Distributor of NorComp : Excellent Integrated System Limited

Datasheet of 477-009-202-001 - D-Sub Connector Receptacle, Female Sockets 9 Position Free Hanging (In-Line) Solder Cup

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)





[477-009-202-001](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: **CABLE MOUNT FILTERED D-SUB CONNECTOR**

| | A | B | C |
|----|---------------|---------------|---------------|
| 9 | 1.204 30.6 | .984 25.0 | .480 12.20 |
| 15 | 1.535 39.0 | 1.312 33.3 | .480 12.20 |
| 25 | 2.078 52.8 | 1.850 47.0 | .480 12.20 |
| 37 | 2.724 69.2 | 2.50 63.5 | .480 12.20 |

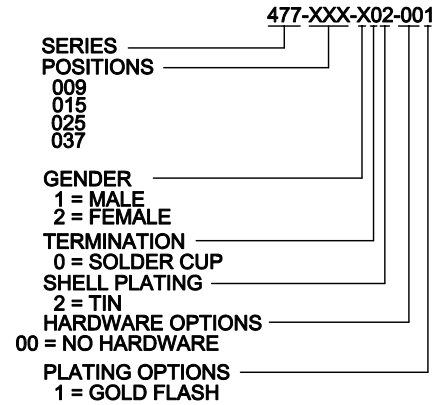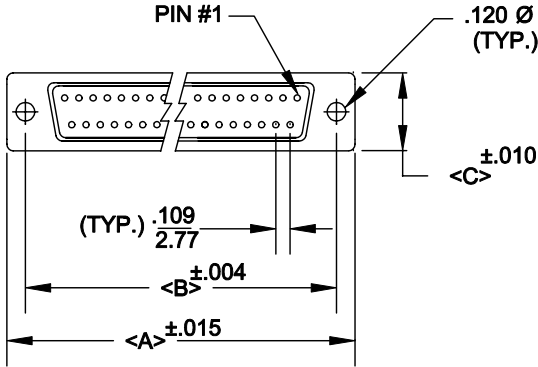

SPECIFICATIONS:

MATERIALS:

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED PBTP
- GLASS-FIBER REINFORCED

ELECTRICALS:

- INDIVIDUAL CAPACITOR VALUE = 1000 pF
- OTHER VALUES AVAILABLE: CONSULT FACTORY
- CURRENT RATING: 5 AMPS
- CONTACT RESISTANCE: <10 mOHMS
- INSULTOR RESISTANCE: 1000 OHMS
- VOLTAGE: 1 KV / AC
- TEMPERATURE: -55°C TO +125°C

| | | | |
|--|---|---|-------------------------------|
| | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN: WAYNE ROBBINS CHECKED: | DATE: 9-01-98 DATE: |
| | SCALE: 1:1 SHEET 1 OF 1 REV 2 | DWG NO. 477-XXX-202-001 | |

NorComp