



Distributor of FCI: Excellent Integrated System Limited

Datasheet of DAM15S600 - D-Sub Connector Receptacle, Female Sockets 15 Position
Through Hole Wire Wrap

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[DAM15S600](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

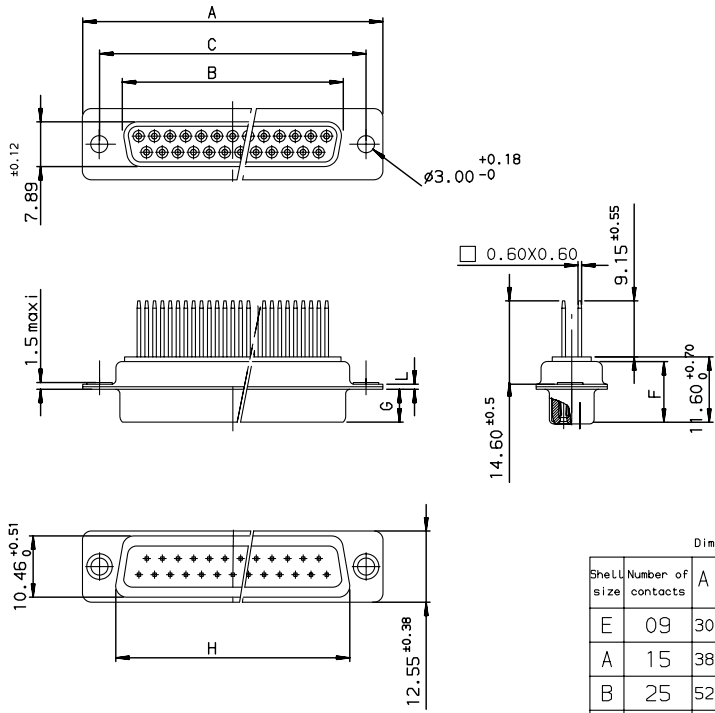

ELECTRICAL DATA

- I max 7.5A
- Contact resistance $\leq 7.3m\Omega$
- Insulation resistance >5000M Ω
- TEST VOLTAGE
- contact/contact >1000V
- contact/ground >1200V

MECHANICAL DATA

- Mechanical endurance >500
- Material shell steel, cadmium plated
- Material insulator glass filled thermoplastic UL94V0
- Material contacts sockets : phosphore bronze
- sockets : gold over nickel
- Finish on termination end bright Tin -Lead over nickel

ENVIRONMENTAL DATA

- Climatic category -55/125/56

Dimensions are in millimeters

Shell size	Number of contacts	A $+0.76_0$	B $+0.25_0$	C ± 0.12	F $+0.51_0$	G $+0.25_0$	H $+0.51_0$	L $+0.22$	Part number
E	09	30.43	16.21	24.99	10.64	6.05	19.02	0.80	DEM09S600
A	15	38.76	24.54	33.32	10.64	6.05	27.25	0.80	DAM15S600
B	25	52.65	38.25	47.04	10.64	6.05	41.02	0.80	DBM25S600
C	37	68.94	54.71	63.50	10.64	6.05	57.45	0.80	DCM37S600

Copyright FCI

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	JARRY	2000/05/31	ANGULAR	0.X	± 0.1
Eng	JARRY	2000/05/31	LINEAR	0.XX	± 0.1
Chr	LEGARE	2000/05/31	0.XX	0.XXX	± 0.1
Appr	LEGARE	2000/05/31	Product family		SUB
FCI logo				SOCKETS CONNECTORS SUB D	
WITH WIRE WRAP				C01-8637-0503	
catalog no				CUSTOMER sheet 1 of 1	

REV F - 2006-04-17