

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies](#)
[TLP150R-96S12FJ](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

POWER

TLP150 Series Single Output

Data Sheet

Total Power: 150 Watt
Input Voltage: 85 - 264 Vac
of Outputs: Single



SPECIAL FEATURES

- 150 W on main channel with only 200 LFM
- Low profile fits 1U applications
- Active PFC and EN61000-3-2 compliant
- Integrated Or-ing diode
- Active current sharing
- Integrated control and monitoring features
- Overcurrent, overvoltage and overtemperature protection
- Compliance to EN55022-B conducted noise standard
- 12 V fan output
- 5 V standby output (optional)
- RoHS compliant
- Two year warranty

SAFETY

- TUV EN60950-1/IEC60950-1
- UL60950-1/CSA22.2 No.60950-1

Electrical Specifications

Output		
Adjustment range		± 10%
Total regulation (line and load)	Main output Auxiliary outputs Fan output	± 3% ± 5% ± 10%
Turn-on delay	@120 Vac input	2.0 s max.
Transient response	Main output 25% to 75% step at 0.5 A/μs	5% max. dev., 1 ms max. recovery to 1%
Temperature coefficient		±0.02%/°C
Overvoltage protection	Main outputs	125% ± 5%
Short circuit protection	Current limited	Continuous
Minimum output current	Singles	0 A
Fan voltage output	See Note 9	12 V @ 0.5 A
Standby output	See Note 9	5 V @ 1.0 A
Input		
Input voltage range	Universal input	85 - 264 Vac
Input frequency range		47 - 63 Hz
Input surge current	264 Vac (cold start)	40 A max.
Safety ground leakage current	264 Vac, 50 Hz	1 mA
Input current	100 Vac @ 250 W 120 Vac @ 250 W 230 Vac @ 250 W	2.5 A rms 1.8 A rms 0.8 A rms
Input fuse	UL/IEC127	T 3.15 A, 250 Vac

LPS100-M Series Data Sheet
EMC Characteristics

Conducted emissions	EN55022, FCC part 15	Level B
Harmonic current correction	EN61000-3-2	Compliant
ESD air	EN61000-4-2	Level 3
ESD contact	EN61000-4-2	Level 3
Fast transients	EN61000-4-4	Level 4
Surge	EN61000-4-5	Level 3
Conducted immunity	EN61000-4-6	Level 3

General Specifications

Hold-up time	85 Vac @ 60 Hz	20 ms @ 150 W
Efficiency	115 Vac @ 150 W 230 Vac @ 150 W	81% typ. 84% typ.
Isolation voltage	Input/output Input/chassis	3000 Vac 1500 Vac
Safety approvals (see note 6)	UL/cUL UL60950-1/CSA22.2 No. 60950-1 VDE EN60950-1/IEC60950-1	
Weight	260g (9.2 oz)	
MTBF (@25 °C)	Telcordia SR-332 MIL-HDBK-217F	900,000 hours min. 350,000 hours min.

Environmental Specifications

Thermal performance	Operating ambient, (See derating curve)	0 °C to +70 °C
	Non-operating	-40 °C to +85 °C
	0 °C to 50 °C ambient, 200 LFM forced air	150 W
	0 °C to 50 °C ambient, convection cooled	100 W
	50 °C to 70 °C ambient,	Derate linearly to 50% load
Relative humidity	Non-condensing	5 - 95% RH
Altitude	Operating	10,000 feet max.
	Non-operating	30,000 feet max.
Vibration (See Note 7)	5 - 500 Hz	2.4 G rms peak
Shock	per MIL-STD-810E	516.4 Part IV

TLP150 Series Data Sheet

Ordering Information

Output Voltage	Output Currents			Ripple ⁽³⁾	Total Regulation	Model Numbers ^(8, 10)
	Min	Max (free air) ^(1, 4)	Max (forced air) ^(2, 4)			
12 V	0 A	8.4 A	12.5 A	120 mV	± 3.0%	TLP150R-96S12J
24 V	0 A	4.2 A	6.3 A	240 mV	± 3.0%	TLP150R-96S24J
36 V	0 A	2.7 A	4.2 A	360 mV	± 3.0%	TLP150R-96S36J
48 V	0 A	2.1 A	3.2 A	480 mV	± 3.0%	TLP150R-96S48J

Notes

- Free air convection. Maximum continuous output power not to exceed 100W. Refer to Figure 1 for the derating curve.
- 200 LFM forced air cooling from the ac input side. Maximum continuous output power not to exceed 150 W.
- Figure is peak-to-peak for room temperature rating. Output noise measurements are made across a 20 MHz bandwidth using a 6 inch twisted pair, terminated with a 10 µF tantalum capacitor and a 0.1 µF ceramic capacitor.
- CAUTION: Allow a minimum of 1 second after disconnecting line power when making thermal measurements. For optimum reliability no part of the heatsink should exceed 115 °C and no semi-conductor case temperature should exceed 120 °C.
- No external filtering required during conducted emissions testing but some applications may require additional filtering to achieve system compliance. Compliance with radiated EMI specifications may require mounting in a suitable enclosure.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- Three orthogonal axes, random vibration 10 minutes for each axes, 2.4 G
- Replace the 'J' at the end of the model number with 'FJ' when the optional standby output and/or remote ON/OFF control is required e.g. TLP150R-96S12FJ.
- 12 V (fan) present when main output is present. An optional 5 Vsb (standby) output is available whenever ac input is present, regardless of remote ON/OFF signal status.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant.
- NOTICE: Some models do not support all options. Please contact your local Artesyn Embedded Technologies representative or use the on-line model number search tool at www.artesyn.com/power.
- Power good signal required 100 mA load on the main output (check with engineering on all models).
- This product is a Component Power Supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and System Integrators, including through Distribution Channels. It is not intended for sale to End Users.

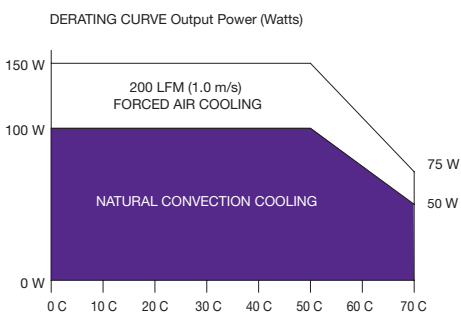


Figure 1: Derating Curve

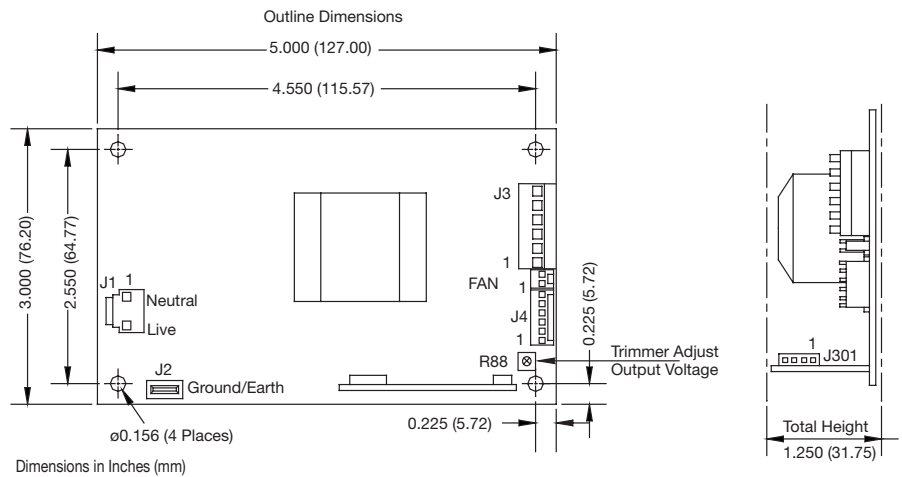


Figure 2: Mechanical Drawing

TLP150 Series Data Sheet
Connector and Mating Connector Types

Connector	Type	Mating Connector Type
J1	Molex 09-65-2038 (5273 series) void pin 2 or equivalent	Molex 09-52-4034 (5239 series) or equivalent with Molex 08-52-0072 (2478 series) or equivalent crimp terminals
J2	AMP 63849-1 or equivalent (6.35 mm straight)	AMP 2-520263-4 or equivalent (straight spade for 22-18 AWG wire)
J3	Molex 09-65-2068 (5273 series) or equivalent	Molex 09-52-4064 (5239 series) or equivalent with Molex 08-52-0072 (2478 series) or equivalent crimp terminals
J4	Molex 22-23-2061(6373 series) or equivalent	Molex 22-01-3067 (2695 series) or equivalent with Molex 08-50-0113 (2759 series) or equivalent crimp terminals
J301 (Optional)	Leoco 2421P04H000 (2421 series) or equivalent	Leoco 2420S04000 (2420 series) or equivalent with Leoco 2453TPB00V1 (2453T series) or equivalent crimp terminals or JST EHR-4 (EH series) or equivalent with JST SEH-001T-P0.6 (EH series) or equivalent crimp terminals
Fan	Molex 22-23-2021(6373 series) or equivalent	Molex 22-01-3027 (2695 series) or equivalent with Molex 08-50-0113 (2759 series) or equivalent crimp terminals

Pin Connections
J1 Pin Connections

Pin 1	Neutral
Pin 2	Live

J2 Tab Connections

Tab	Ground/Earth
------------	--------------

Pin Connections
J3 Pin Connections

Pin 1	RTN	Main Return
Pin 2	RTN	Main Return
Pin 3	RTN	Main Return
Pin 4	Vo	+Main Output
Pin 5	Vo	+Main Output
Pin 6	Vo	+Main Output

Pin Connections
J4 Pin Connections

Pin 1	-S	-Vo Remote Sense
Pin 2	DC OK	DC Power Good Signal
Pin 3	PW OK	Power Good*
Pin 4	LS	Load Share Signal
Pin 5	+S	+Vo Remote Sense
Pin 6	SGND	Signal Common

J301 Pin Connections (Optional)

Pin 1	5 Vsn	Standby Voltage
Pin 2	SGND	Signal Common
Pin 3	Reserved	Do Not Connect
Pin 4	PS OFF	Remote ON/OFF Signal

Fan Pin Connections

Pin 1	+ 12 V	Fan Voltage
Pin 2	+SGND	Return

WORLDWIDE OFFICES
Americas

 2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

 Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

 14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333


www.artesyn.com

 Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

 For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com