



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[031-80905](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

- NOTES:
- MATERIALS AND FINISHES:**
 A. OUTER CONTACT - PHOSPHOR BRONZE, NICKEL PLATING (.0001" THICK)
 B. FRONT BODY - ZINC ALLOY, NICKEL PLATING (.00015" THICK)
 C. CRIMP CONTACT - BRASS, GOLD PLATING (.00003" THICK)
 D. INSULATOR - PTFE
 - ELECTRICAL:**
 A. IMPEDANCE: 75 OHM
 B. FREQUENCY RANGE: DC - 3 GHz
 C. VSWR(RETURNS LOSS): 1.10 UP TO 2 GHz(-26.44 dB), 1.16 UP TO 3 GHz(-22.61 dB)
 D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
 E. WORKING VOLTAGE: 500 VAC PEAK
 - MECHANICAL:**
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -40° C TO +85° C
 - PACKAGING:**
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED "AMPHENOL, 31-80905, AND DATE CODE"
 - FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS SEE AMPHENOL SPEC 349-50756.
 FERRULE TO BE CRIMPED WITH A .178 HEX DIE.
 CONTACT TO BE CRIMPED WITH A .042 SQUARE DIE
 OR A 8 PT CRIMPER AMPHENOL NUMBER 227-11200

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	8/17/06	46206	GSA
B	SEE SHEET 1	12/8/06	46362	GSA
C	NOTE 5 '8 PT CRIMPER AMPHENOL NUMBER CTL-11200'	8/6/07	86681	TC
D	227-11200 WAS CTL-11200\RD-DM110704011	15-Jul-11	48649	DH
E	STAMP WAS CHANGED/ RD-DM110825011	07-Sep-11	48757	SCOTT

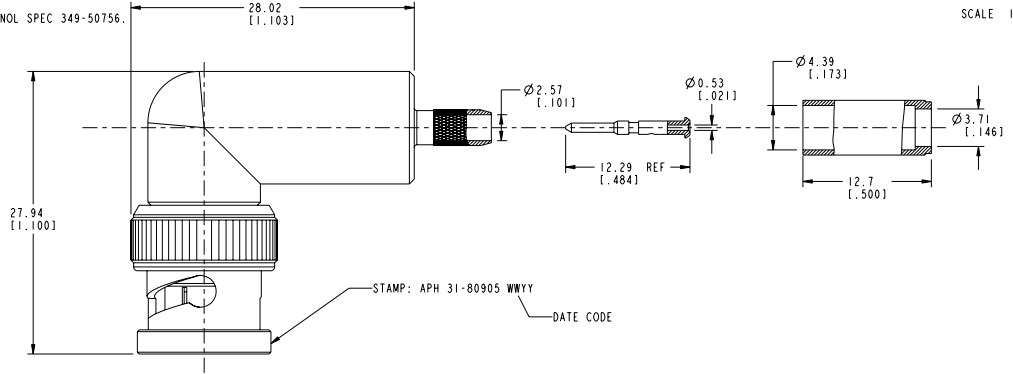

RECOMMENDED CABLE STRIPPING DIMENSIONS

SCALE 3.000

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE	Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com
	SEE NOTE	I. XU	26-Aug-11		
	REFERENCE	ENGINEER	DATE	SCALE: 2.8:1.0 SHEET 2 OF 2	DRAWING NO. 31-80905
	CONFIGURATION LEVEL: □□□□	G. ANTONINI	29-Mar-05	DWG SIZE B REV E	ITEM NO. 31-80905
FINISH	APPROVED	DATE	CAD FILE	PART NO. 31-80905	
	D. HU	05-Sep-11			