

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Amphenol Pcd](#)  
[TJM122604](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

TJM122604

REV	ECN	APP'D
-	5814	ET 4-13-06

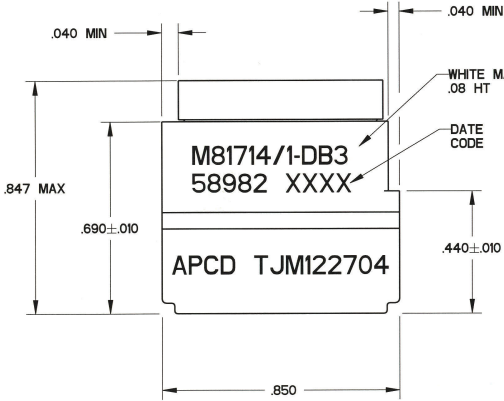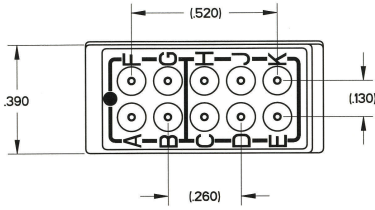

- NOTES:  
 1. PERFORMANCE:  
 A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/1  
 B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.  
 C) DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.  
 D) OPERATING TEMPERATURE: -65 C TO 200 C.  
 E) CURRENT RATING: 5 AMPS  
 F) VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8  
 2. MATERIALS:  
 A) HOUSING - POLYETHERIMIDE, COLOR: BLACK.  
 B) GROMMET - SILICONE ELASTOMER, COLOR: BLUE  
 C) INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED  
 D) CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED				MARKING		CLASS
	PINS		PLUGS		APCD QPL NO.	ML NO	
TJM122604	-	-	-	-	-	-	-
TJM122704	11	M39029/1-100	CNP068000	2	CNA032401	TJM122704	M81714/1-DB3

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING		TITLE <b>TERMINAL JUNCTION          MODULE          SZ 22 FEEDBACK, DB3</b>		REV -
			ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA		SIZE <b>B</b>	

TJM122604

TJM122604