



Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Pcd](#)
[TJSE20709](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV	ECN	APP'D
-	4080	JT 8/29/00
A	-	AP 2/7/01

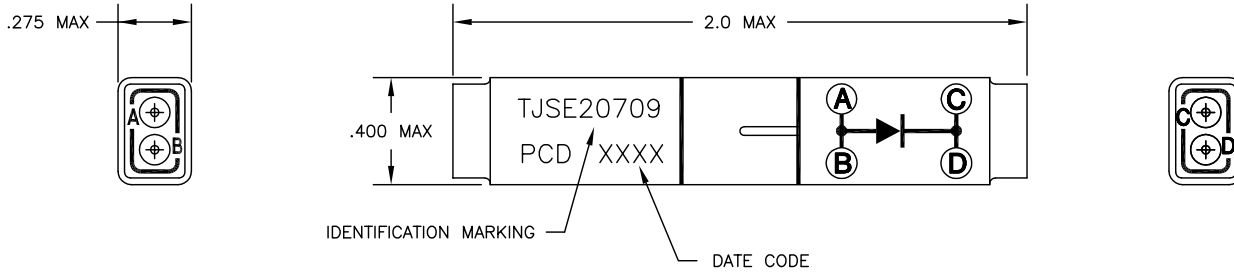

NOTES:

- MATERIALS-
 INSULATOR BODY: POLYETHERIMIDE PER MIL-P-46184
 SEALING GROMMET: SILICONE RUBBER PER ZZ-R-765
 INTERNAL CONTACTS: COPPER ALLOY, GOLD PLATE PER MIL-C-45204
 RETAINER CLIPS: BERYLLIUM COPPER
 DIODE: JANTX1N5622
- PART REQUIRES SIZE 16/20 PIN CONTACTS, M39029/1-101, SUPPLIED WITH DIRECT SHIPMENT
- PART MEETS ENVIRONMENTAL AND ELECTRICAL REQUIREMENTS PER MIL-T-81714 (SUBJECT TO LIMITATIONS OF INTERNAL DIODES)-
 TEMPERATURE: -65°C TO 200°C
 INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C
 DIELECTRIC WITHSTANDING VOLTAGE: 1500Vrms AT SEA LEVEL
 200Vrms AT 100,000 FT ALTITUDE
 CONTACT CURRENT RATING: 7.5 AMPS
 VIBRATION AND SHOCK: MIL-T-81714, PARAGRAPH 3.5.8 & 3.5.9

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	SPECIFICATION DRAWING			<i>TITLE</i> WIRE SPLICE, DOUBLE ELECTRONIC, 1N5622 DIODE SIZE 20, BUSSED	
			<i>ENGR</i> A. PATRIE 8/21/00				
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		<i>CHKD</i> A. PATRIE		SIZE A	DWG NO. TJSE20709	REV A
			<i>APPD</i> J. TON		CODE: 58982	SCALE: 2/1	SHEET 1 OF 1