

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[0016020085](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




SEE NOTE 7

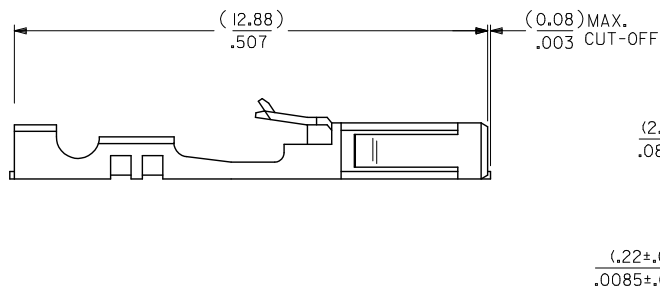

16-02-0085

INTERLEAF PAPER

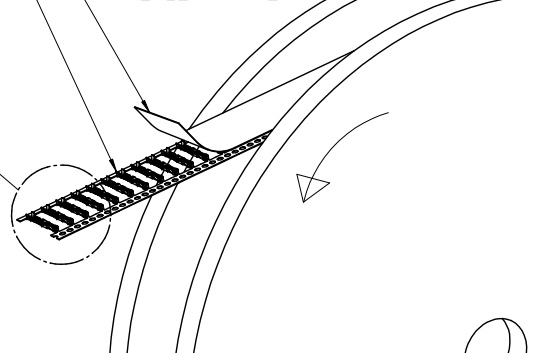

NOTES:

1. TERMINAL TO BE USED IN HOUSING 70066-**** AND 70450-****.
2. REFER TO PRODUCT SPECIFICATION PS-70058.
3. REFER TO MOLEX OPERATIONS AND SERVICE MANUAL FOR CRIMP DETAILS.
4. TERMINAL TO BE USED WITH $(0.64) \pm .025$ SQUARE PINS.
5. TERMINAL TO BE USED WITH 32-36 AWG STRANDED WIRE WITH $(0.64) \pm .025$ MAXIMUM DIAMETER INSULATION.
6. TERMINALS SUPPLIED IN REEL FORM.
7. CRIMP SIZE INDICATOR B=32-36 AWG

PLATING:

- .000030 MINIMUM GOLD PLATE IN SELECT AREA,
- .000075 MINIMUM TIN PLATE IN SELECT AREA,
- OVER NICKEL PLATE OVERALL.

REEL UNWIND DIR EC NO: UCP2013-5345 DRAWN BY: RWHIPPLE 2013/06/11 CHKD: MORGAN 2013-6/11 APPR: SMILLER 2013/07/09	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 10:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
		▽=0		mm	INCH	DRAWN BY RWHIPPLE	DATE 2013/06/11	TITLE TERMINAL - BOX/CRIMP FOR 32-36 AWG ON A REEL	
		▽=0	4 PLACES ± .005			CHECKED BY JAS	DATE 1988/02/03	molex	
		▽=0	3 PLACES ± .005			APPROVED BY SMILLER	DATE 2013/07/09		
			2 PLACES ± 0.13 ± .01			MATERIAL NO. 16-02-0085			DOCUMENT NO. SD-70058-0017
			1 PLACE ± 0.25 ± .01			SHEET NO. 1 OF 1			
			0 PLACE ± .005 ± .01			ANGULAR ± 1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	