## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Wurth Electronics Inc 7448040515

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>





## **Distributor of Wurth Electronics Inc: Excellent Integrated System Limited**

Datasheet of 7448040515 - CHOKE COM MODE


more than you expect











B Recommended hole pattern: [mm]



Scale - 1:1



#### **D Electrical Properties:**

Properties	Test conditions		Value	Unit	Tol.
Inductance	10 kHz/ 0.1 mA	L	2x 15.0	mH	+50%/-30%
Rated current	@ 70°C	I <sub>R</sub>	5.0	Α	max.
DC Resistance	@ 20°C	R <sub>DC</sub>	2x 38	mΩ	max.
Rated voltage	50 Hz	$U_{R}$	250	V (AC)	max.
Insulation test voltage	50 Hz/ 5 mA/ 2 sec.	UT	1500	V (AC)	

## C Schematic:



#### E General information:

It is recommended that the temperature of the part does not exceed +125°C under worst case conditions.

•Storage Temperature: -20°C to 60°C

•Operating Temperature: -40°C to 125°C

DESCRIPTION

•Temperature Rise: < 55K
•Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

				Projection ,
				) )
				Würth Elektronik eiSos GmbH & Co. KG
1.3	2015-02-16	SSt	HasA	EMC & Inductive Solutions Max-Evth-Str. 1
1.2	2014-05-13	SSt	SSt	74638 Waldenburg
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com
DD/	DATE	DV/	OUEOVED	CIGOS@WC-UTIIITE.CUTT

**WE-CMBNC Common Mode Power Line Choke Nanocrystalline** 

Order.- No.

7448040515


COMPLIANT ROHS&REACH WÜRTH ELEKTRONIK

SIZE






### F Typical Insertion Loss Characteristics:



### Test Setup:




				Projection		DESCRIPTION				
						WE_CMRNC Cor	nmon Mode Power Lir			
				Würth Elektronik eiSos Gmbl	H & Co. KG	Choke Nanocry		ic		
1.3	2015-02-16	SSt	HasA	EMC & Inductive Solutions Max-Evth-Str. 1						
1.2	2014-05-13	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE		
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0		7440040545	ROHS&REACH WÜRTH ELEKTRONIK	OLL		
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com		7448040515		A4		
REV	DATE	BY	CHECKED	CIOOS SIVE GIIIII C.COIII		Size: Type L				

In section component has been because or progress as to use a separate account or opportunity or location, unless the parties name recovered as a green in speciment with a control, transportation signal, disaster prevention, medical, public information network etc.. With Elektronik eSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.




more than you expect

#### **G Packaging Specification - Carton [mm]:**



		Α0	В0	P0	P1	P2	т	A1	B1	Case	VPE/ packaging Unit
	tolerance	typ.	typ.	ref.	ref.	ref.	typ.	ref.	ref.		pcs.
size	IndCMBNC_L	235,0	185,0	41,0	31,0	32,5	24,0	211,0	161,0	Paper	25



		No. of Cases	Inner Carton	A2	B2	C2	Master Carton	А3	В4	СЗ	Packaging Unit
	tolerance	pcs.	pcs.	typ.	typ.	typ.	pcs.	typ.	typ.	typ.	pcs.
27	IndCMBNC	8	1	260,0	210,0	217,0	1	275,0	232,0	255,0	200

				Projection		DESCRIPTION WE-CMBNC COI	nmon Mode Power Lir	1e		
1.3	2015-02-16	SSt	HasA	Würth Elektronik eiSos Gmbl EMC & Inductive Solutions	H & Co. KG	Choke Nanocrystalline				
1.2	2014-05-13	SSt	SSt	Max-Eyth-Str. 1 74638 Waldenburg		Order No.	COMPLIANT			
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0		ROHS&REJ				
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com		7448040515 WORTH ELEKTRONIK				
REV	DATE	BY	CHECKED	CIGUS SENC-UTIIITE.CUTT		Size: Type L				




more than you expect

#### **H Soldering Specifications:**

# WÜRTH ELEKTRONIK

#### **H4: Classification Wave Soldering Profile:**

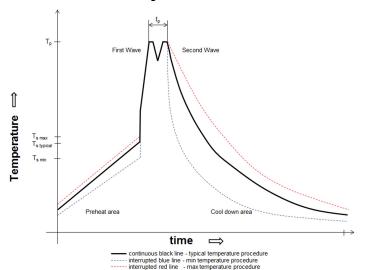

#### **H5: Classification Wave Profile**

Profile Feature	Pb-Free Assembly	Sn-Pb Assembly
Preheat  - Temperature Min (T <sub>SMIn</sub> )  - Temperature Typical (T <sub>stypical</sub> )  - Temperature Max (T <sub>SMIaX</sub> )  - Time (t <sub>s</sub> ) from (T <sub>SMI</sub> to T <sub>SMIAX</sub> )	100°C 120°C 130°C 70 seconds	100°C 120°C 130°C 70 seconds
△ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (T <sub>p</sub> )	250°C - 260°C	235°C - 260°C
Time of actual peak temperature (t <sub>p</sub> )	max. 10 seconds max. 5 second each wave	max. 10 seconds max. 5 second each wave
Ramp-down rate - Min - Typical - Max	~ 2 K/s ~ 3.5 K/s ~ 5 K/s	~ 2 K/s ~ 3.5 K/s ~ 5 K/s
Time 25°C to 25°C	4 minutes	4 minutes

refer to EN 61760-1:2006

				Projection ————————————————————————————————————		DESCRIPTION		
1.3	2015-02-16	SSt	HasA	Würth Elektronik eiSos Gmbl- EMC & Inductive Solutions	H & Co. KG	WE-CMBNC Cor Choke Nanocry	nmon Mode Power Lir stalline	1e
1.2	2014-05-13	SSt	SSt	Max-Eyth-Str. 1 74638 Waldenburg		Order No.	COMPLIANT	SIZE
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0		7440040545	ROHS&REACH	OIZL
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com		7448040515		A4
REV	DATE	BY	CHECKED	CIOUS SINC VIIIII C.CUIII		Size: Type L		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use.

Moreoner Wilton Electronic eSics Smith & Co KG products are neither designed nor intended for use in a reason such as millarlay, averageae, acidation, unless of the product is reasonable upperbation signal, disaster prevention, medical, public information network etc.. With Electronic eSics Gmith & Co KG must be informed about the intent of such usage before the design-in-state in a chaffion sufficient or addition sufficient or intents. For existing the prevention, medical, public information network etc.. With Electronic eSics Gmith & Co KG must be informed about the intent of such usage before the design-in-state in a chaffion sufficient indication. In a chaffin sufficient indication is prevented in the prevention or intention or intention and intention in a chaffin sufficient indication. In a chaffin sufficient indication is prevented in the prevention or intention and intention in a chaffin sufficient indication. In a chaffin sufficient in



more than you expect

#### **I Cautions and Warnings:**

The following conditions apply to all goods within the product series of WE-CMBNC of Würth Elektronik eiSos GmbH & Co. KG:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

#### Product specific:

- Follow all instructions mentioned in the data sheet, especially:

  •The soldering profile has to be complied with according to the technical wave soldering specification, otherwise this will void the warranty.
  - · Reflow soldering is only allowed after evaluation and approval
  - •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be

  - Wolation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
     Due to heavy weight of the component, strong forces and high accelerations might have the effect to damage the electrical connection or to harm the circuit board and will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness

				Projection		DESCRIPTION		
						WE-CMRNC CO	mmon Mode Power Lir	10
				Würth Elektronik eiSos Gmb	H & Co. KG	Choke Nanocry		
1.3	2015-02-16	SSt	HasA	EMC & Inductive Solutions  Max-Evth-Str. 1		onono nanoony		
1.2	2014-05-13	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0		-440040-4-	ROHS&REACH	
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com		7448040515	TOWN BEEK HOUR	A4
REV	DATE	BY	CHECKED	CISUS@WE-UIIIIIE.CUIII		Size: Type L		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wilm Elektronic Resides Genirit & Co Kit or products are neither designed and on the control, transportation signal, disaster prevention, medical, public information network etc., Wilm Elektronic Resides Genital & Co Kit or use to effect and on the control of the residence of the control of the control of the residence of the residenc





more than you expect

#### J Important Notes:

#### The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications
It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty,

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve spe cific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected



#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights
All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection 1		DESCRIPTION				
						WE-CMBNC Co	mmon Mode Power Lir	ne		
				Würth Elektronik eiSos Gmbl	H & Co. KG	Choke Nanocry				
1.3	2015-02-16	SSt	HasA	EMC & Inductive Solutions Max-Evth-Str. 1		onoke Handerystanine				
1.2	2014-05-13	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE		
1.1	2014-04-02	SSt	HasA	Germany Tel. +49 (0) 79 42 945 - 0		7440040545	ROHS&REACH WURTH ELEKTRONIK	OLL		
1.0	2014-03-17	SSt	HasA	www.we-online.com eiSos@we-online.com		7448040515	TOWN BEEKINGAIN	A4		
REV	DATE	BY	CHECKED	elous@we-utilite.cum		Size: Type L				

ectronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially equipment or where a failure of the product is reasonably expected to cause seerer personal injury or death, unless the parties have executed an agreement specifically governing such usage before sign-in addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.