

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1798610000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

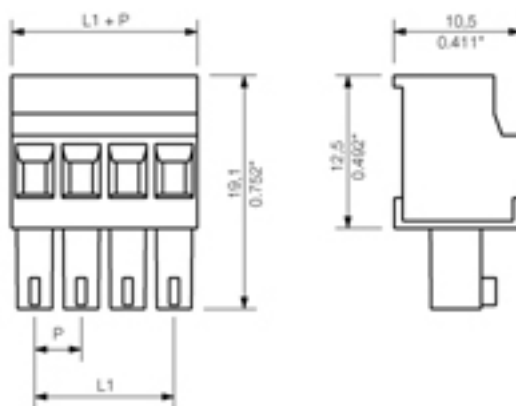

General ordering data

| | |
|------------------|--|
| Order No. | 1798610000 |
| Part designation | BCZ 3.81/10/90 SN SW |
| Version | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 90°, Box |
| EAN | 4032248243242 |
| Qty. | 50 pc(s). |

System parameters

| | |
|---------------------------------|--------------------------|
| Conductor connection system | Clamping yoke connection |
| Outgoing direction of conductor | 90° |
| Pitch | 3.81 mm |
| Pitch in inch | 0.15 inch |
| No. of poles | 10 |
| No. of rows | 1 |
| Screwdriver blade | 0.4 x 2.5 |
| Screwdriver blade standard | DIN 5264 |
| Tightening torque, min. | 0.2 |
| Tightening torque, max. | 0.25 Nm |
| Clamping screw | M 2 |
| Stripping length | 7 mm |
| L1 in mm | 34.29 mm |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/90/270 | BCZ 3.81/90

System parameters

| | |
|---|------------------------|
| L1 in inch | 1.35 inch |
| Electric shock protection to DIN VDE 0470 | IP 20 |
| Electric shock protection to DIN VDE 0470 | Safe from finger touch |

Material data

| | |
|---------------------------|---------------------|
| Insulating material | PA GF |
| Colour | black |
| colour chart | Similar to RAL 9011 |
| Insulating material group | II |
| Flammability class UL 94 | V-0 |
| CTI | >= 475 |
| Contact base material | Copper alloy |
| Contact surface | tinned |

Connectable conductors

| | |
|---|--------------------------|
| Clamping range, min. | 0.08 mm ² |
| Clamping range, max. | 1.5 mm ² |
| AWG, min. | 28 |
| AWG, max. | 16 |
| Solid, min. H05(07) V-U | 0.2 mm ² |
| Solid, max. H05(07) V-U | 1.5 mm ² |
| Flexible, min. H05(07) V-K | 0.2 mm ² |
| Flexible, max. H05(07) V-K | 1.5 mm ² |
| With wire end ferrule, acc. to DIN 46 228/1, min. | 0.2 mm ² |
| With wire end ferrule, acc. to DIN 46 228/1, max. | 1.5 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, min. | 0.2 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, max. | 1.5 mm ² |
| Gauge to EN 60999 a x b; ø | 2.4 mm x 1.5 mm ; 2.4 mm |

DIN IEC rating data

| | |
|--|------------------|
| Rated current, min. No. pins (Tu=20°C) | 17.5 A |
| Rated current, max. No. pins (Tu=20°C) | 15.9 A |
| Rated current, min. No. pins (Tu=40°C) | 17.5 A |
| Rated current, max. No. pins (Tu=40°C) | 14.1 A |
| Rated voltage for overvoltage class/pollution severity II/2 | 320 V |
| Rated voltage for overvoltage class/pollution severity III/2 | 160 V |
| Rated voltage for overvoltage class/pollution severity III/3 | 160 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2 | 2.5 kV |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 2.5 kV |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 2.5 kV |
| Short-time withstand current resistance | 3 x 1s with 76 A |

CSA rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/90/270 | BCZ 3.81/90

CSA rating data

| | |
|------------------------------------|----|
| AWG conductor (field wiring), min. | 28 |
| AWG conductor (field wiring), max. | 16 |

UL 1059 rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |
| AWG conductor, min. | 28 |
| AWG conductor, max. | 16 |

Approvals

Approvals institutes


Classifications

| | |
|------------|-------------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC001284 |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-04 |

Similar products

| Order No. | Part designation | Version |
|------------|---------------------|---|
| 1939820000 | BCZ 3.81/2/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 90°, Box |
| 1798500000 | BCZ 3.81/2/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 90°, Box |
| 1798680000 | BCZ 3.81/2/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 90°, Box |
| 1939830000 | BCZ 3.81/3/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 90°, Box |
| 1798120000 | BCZ 3.81/3/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 90°, Box |
| 1798690000 | BCZ 3.81/3/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 90°, Box |
| 1939840000 | BCZ 3.81/4/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 90°, Box |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/90/270 | BCZ 3.81/90

| | | |
|------------|-------------------------|---|
| 1798550000 | BCZ 3.81/4/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 90°, Box |
| 1798710000 | BCZ 3.81/4/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 90°, Box |
| 1939860000 | BCZ 3.81/5/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 90°, Box |
| 1798570000 | BCZ 3.81/5/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 90°, Box |
| 1798720000 | BCZ 3.81/5/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 90°, Box |
| 1939870000 | BCZ 3.81/6/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 90°, Box |
| 1798590000 | BCZ 3.81/6/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 90°, Box |
| 1798730000 | BCZ 3.81/6/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 90°, Box |
| 1939880000 | BCZ 3.81/7/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 90°, Box |
| 1858960000 | BCZ 3.81/7/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 90°, Box |
| 1871440000 | BCZ 3.81/07/90 SN GN BX | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 90°, Box |
| 1939890000 | BCZ 3.81/8/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 90°, Box |
| 1798130000 | BCZ 3.81/8/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 90°, Box |
| 1798740000 | BCZ 3.81/8/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 90°, Box |
| 1939900000 | BCZ 3.81/9/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 90°, Box |
| 1871430000 | BCZ 3.81/9/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 90°, Box |
| 1871420000 | BCZ 3.81/9/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 90°, Box |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/90/270 | BCZ 3.81/90

| | | |
|------------|----------------------|--|
| 1939910000 | BCZ 3.81/10/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 90°, Box |
| 1798750000 | BCZ 3.81/10/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 90°, Box |
| 1939920000 | BCZ 3.81/11/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 90°, Box |
| 1899380000 | BCZ 3.81/11/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 90°, Box |
| 1899370000 | BCZ 3.81/11/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 90°, Box |
| 1939930000 | BCZ 3.81/12/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 12, 90°, Box |
| 1798630000 | BCZ 3.81/12/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 12, 90°, Box |
| 1798760000 | BCZ 3.81/12/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 12, 90°, Box |
| 1939940000 | BCZ 3.81/13/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 13, 90°, Box |
| 1899420000 | BCZ 3.81/13/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 13, 90°, Box |
| 1899410000 | BCZ 3.81/13/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 13, 90°, Box |
| 1939950000 | BCZ 3.81/14/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 14, 90°, Box |
| 1899460000 | BCZ 3.81/14/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 14, 90°, Box |
| 1899450000 | BCZ 3.81/14/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 14, 90°, Box |
| 1939960000 | BCZ 3.81/15/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 15, 90°, Box |
| 1899500000 | BCZ 3.81/15/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 15, 90°, Box |
| 1899490000 | BCZ 3.81/15/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 15, 90°, Box |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Socket connectors, screw clamp connection, pitch 3.81 | BCZ 3.81/90/270 | BCZ 3.81/90

| | | |
|------------|----------------------|--|
| 1939970000 | BCZ 3.81/16/90 SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 16, 90°, Box |
| 1798660000 | BCZ 3.81/16/90 SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 16, 90°, Box |
| 1798770000 | BCZ 3.81/16/90 SN GN | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 16, 90°, Box |