

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1388760000](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Plug connectors, solder connection pitch 5.08 | SLAD 90 | SLAD 90B

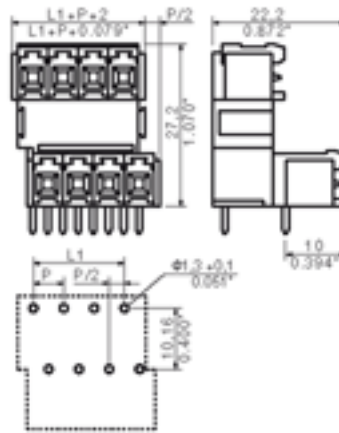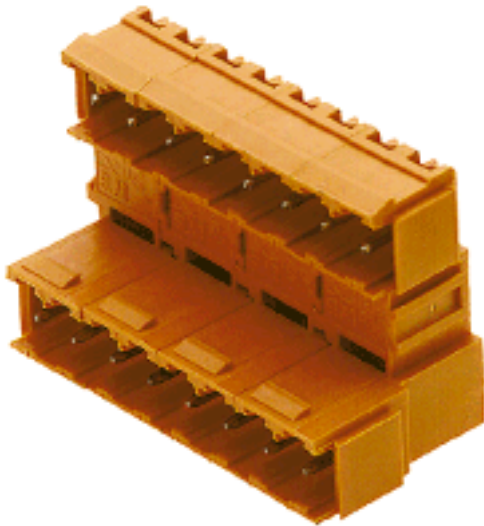

General ordering data

Order No.	1388760000
Part designation	SLAD 12/6/90B 3.2SN OR
Version	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 12, 90°, Box
EAN	4008190043742
Qty.	50 pc(s).

System parameters

Fitted to PCB	Soldered connection
Outgoing elbow	90°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	12
Solder pin length	3.2 mm
Can be coded	Yes
No. of rows	2
No. of solder pins per pole	1
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
L1 in mm	25.4 mm
L1 in inch	1 inch
Insulation resistance	1 MΩ

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Plug connectors, solder connection pitch 5.08 | SLAD 90 | SLAD 90B

System parameters

Electric shock protection to DIN VDE 0470 Safe from back-of-hand touch, plugged

Material data

Insulating material	PBT GF
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned
Constant operating temp., min.	-25 °C
Constant operating temp., max.	120 °C
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	10 A
Rated current, max. No. pins (Tu=20°C)	7 A
Rated current, min. No. pins (Tu=40°C)	8.5 A
Rated current, max. No. pins (Tu=40°C)	6 A
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated voltage for overvoltage class/pollution severity II/2	400 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Short-time withstand current resistance	3 x 1s with 70 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	7 A

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

Approvals

Approvals institutes



Downloads

CAD Library (P-CAD Format - Standard) SLAD.LIB

Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1320660000	SLAD 4/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 4, 90°, Box
1320760000	SLAD 6/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 6, 90°, Box
1388560000	SLAD 8/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 8, 90°, Box
1388660000	SLAD 10/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 10, 90°, Box
1388860000	SLAD 14/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 14, 90°, Box
1388960000	SLAD 16/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 16, 90°, Box
1389060000	SLAD 18/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 18, 90°, Box
1389160000	SLAD 20/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 20, 90°, Box
1389260000	SLAD 22/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 22, 90°, Box
1389360000	SLAD 24/6/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 24, 90°, Box

1390660000	SLAD 26/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 26, 90°, Box
1390760000	SLAD 28/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 28, 90°, Box
1390860000	SLAD 30/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 30, 90°, Box
1390960000	SLAD 32/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 32, 90°, Box
1391060000	SLAD 34/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 34, 90°, Box
1391160000	SLAD 36/6/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 36, 90°, Box
1391260000	SLAD 38/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 38, 90°, Box
1391360000	SLAD 40/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 40, 90°, Box
1391460000	SLAD 42/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 42, 90°, Box
1391560000	SLAD 44/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 44, 90°, Box
1391660000	SLAD 46/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 46, 90°, Box
1391760000	SLAD 48/6/90B 3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 48, 90°, Box