Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

FCI
VJ02615200J0G

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of FCI: Excellent Integrated System Limited
Datasheet of VJ02615200J0G - 762 TB RIS CLA 180 STACK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Copyright FCI.

FCIconnect.com

PRODUCT NUMBER	PITCH
VJxx61x200J0G	7.62 mm



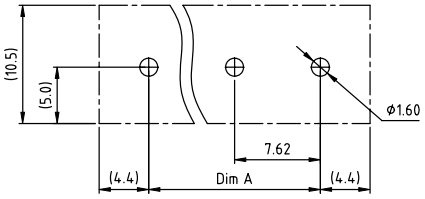

RECOMMENTED P.C.B LAYOUT
TOP VIEW

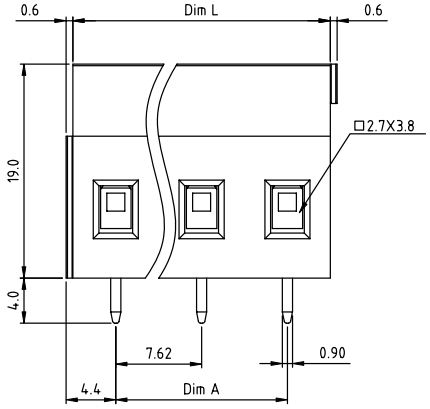

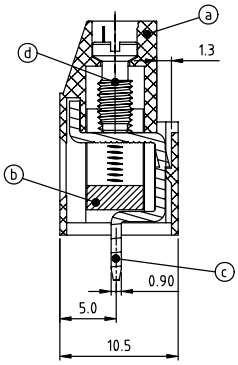

Material:
- Item ⓐ Terminal housing:Thermoplastic (UL 94V-0)
- Item ⓑ Clamp: Brass Ni plated
- Item ⓒ Solder pin:Brass Tin plated
- Item ⓓ Terminal screw: Steel Zinc plating"-"slot type

Electrical cULus / VDE
- Voltage rating : 300VAC / 750V
- Current rating : 20A / 24A
- Wire range : 0.2-2.5mm²
- Solid wire(AWG) : 12-30
- Stranded wire(AWG) : 12-30
- Torque : 3.5 Lb-In / 0.5 N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: c UL us VDE

DIMENSION

Dim L	N×7.62
Dim A	(N-1)×7.62

N=Number of poles

Poles	Tolerance
2p-6p	±0.20
7p-12p	±0.30
13p-16p	±0.40

PART NO.: VJ xx 6 1 x 2 00J0 G

End stackable
No. of poles
02 2 poles
03 3 poles
... ...
16 16 poles

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant (lead<4%) In copper Alloy

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
				angles	linear X.±0.5 / X.X±0.3 / X.XX±0.1	MM	TERMINAL BLOCK
				X°±1°		scale	RISING CLAMP, 180D WIRE INLET,END STACKABLE
				dr	EVIN ZHONG 040914	FCI	dwg no VJxx61x200J0G — sheet 1 of 1 — size A4
				engr	EVIN ZHONG 040914		
				chr	HANKE FENG 040914		
				appd	SHI JUN 040914		type CUSTOMER Drawing
sheet index	revision sheet	A 1					

form: A4mmXLc