

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[7914380000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

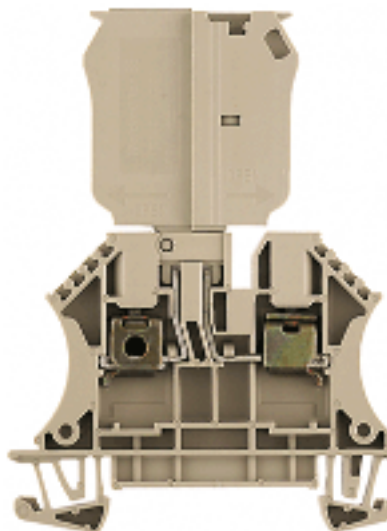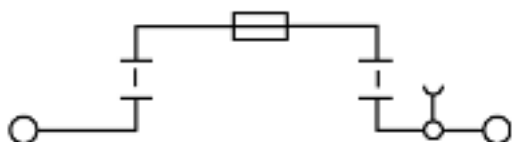

#### General ordering data

Order No.	7914380000
Part designation	WTR 4/SI LD 70V
Version	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
EAN	4032248144822
Qty.	25 pc(s).

#### Product notes

Note, ordering data	UL/CSA specified for 400 V cartridge fuse; otherwise the specified voltage range also applies for UL/CSA.
Note, technical data	The rated current of the terminal is determined by the max. power loss of 1.6 W at the cartridge fuse.
Function	30 - 70V

#### 2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	2.5 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	1.5 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	1.5 mm <sup>2</sup>

#### Additional technical data

Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1

#### Additional technical data

No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Fuse terminal

#### CSA rating data

Voltage (CSA)	300 V
CSA current	6.3 A
Min. cross-section (CSA)	AWG 22
Max. cross-section (CSA)	AWG 10

#### Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	4 mm <sup>2</sup>

#### Conductors for clamping (rated connection)

Clamping range, min.	0.22 mm <sup>2</sup>
Clamping range, max.	6 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	13 mm
Clamping screw	M 3
Blade size	0.6 x 3.5 mm
Tightening torque range	0.5...1.0 Nm
Torque level with DMS electric screwdriver	2
Gauge to IEC 60947-1	A4
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	6 mm <sup>2</sup>
Stranded, min.	1.5 mm <sup>2</sup>
Stranded, max.	6 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	4 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	4 mm <sup>2</sup>
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 10
AWG conductor size, min.	0.13 mm <sup>2</sup>
AWG conductor size, max.	5.26 mm <sup>2</sup>

#### Dimensions

Width	6.1 mm
Height of lowest version	80.5 mm
Length	60 mm
TS 35 offset	32 mm

#### Disconnect terminals

Torque level with DMS electric screwdriver	2
--	---

#### Display element

Operating voltage for display, max.	70 V
Operating voltage for display, min.	35 V
Type of voltage for indicator	AC/DC

#### Fuse terminals

Display	Red LED
Fuse holder (cartridge holder)	pluggable
Operating voltage, max.	70 V
Type of voltage for indicator	AC/DC

#### Rating data

Rated cross-section	4 mm <sup>2</sup>
Rated voltage	400 V
Rated impulse voltage	6 kV
Rated current	6.3 A
Standards	IEC 60947-7-3
Current with max. conductor	6.3 A
Pollution severity	3

#### UL rating data

Voltage (UL)	300 V
Current (UL)	6.3 A
Min. cross-section (UL)	AWG 22
Max. cross-section (UL)	AWG 10

#### Approvals

Approvals institutes



#### Classifications

ETIM 2.0	EC000899
ETIM 3.0	EC000899
eClass 4.1	27-14-11-16
eClass 5.0	27-14-11-16
eClass 5.1	27-14-11-16

### Similar products

Order No.	Part designation	Version
1763940000	WTR 2.5/SI	Fuse terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1763970000	WTR 2.5/SI LD 150V	Fuse terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1763980000	WTR 2.5/SI LD 250V	Fuse terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1763950000	WTR 2.5/SI LD 36V	Fuse terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
7910240000	WTR 4 SI	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
7914390000	WTR 4/SI LD 150V	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
7914400000	WTR 4/SI LD 250V	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
7914370000	WTR 4/SI LD 36V	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35