

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[104-1030-WH-00050](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

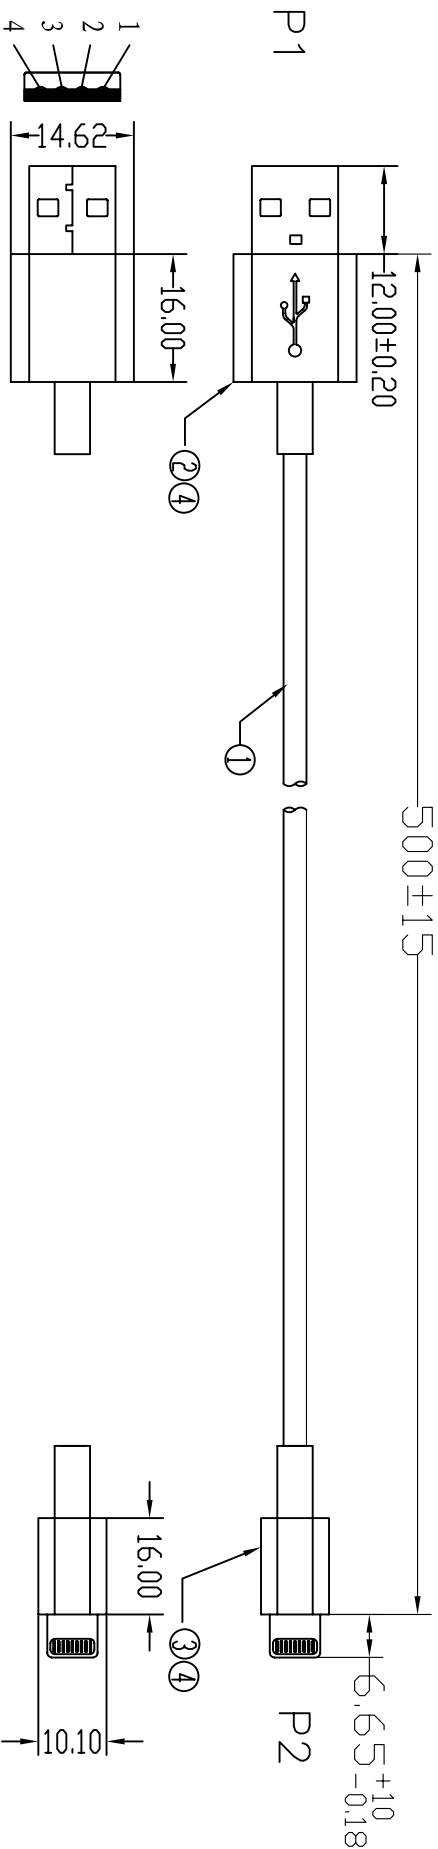

Technical requirements:

- 1 electrical testing requirements: 100% through 15 mobile phone test, data synchronization normal
- USB DC300V 20MΩ 0.1S no open circuit, short circuit, high pressure and other adverse
- 2 appearance: shell scratch, line no stains, forming without deformation, shrinkage, variegated, flash and other undesirable

④	TUBE	1	BLACK TUBE, 006.0mm, L=18mm, 125℃ 600V
	COPPER FOIL	1	W=5*1=15mm, DOUBLE-SIDE COPPER FOIL
	IN MOLD	3.7g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)
	OVER MOLD	1g	IP-5 MATERIAL: PC APPLE WHITE, PIINT GRAY USB LOGO(THE NEW MOLD EXTENDED) WHIT PROTECTIVE FILM
③	SNAP-FIT	1g	IP-5 SNAP-FIT MATERIAL: PC APPLE WHITE
	SHIELD CASE	1	C48 SHIELD CASE UP COVER, MATERIAL: COPPER NICKEL ZINC ALLOY, THICKNESS 0.3mm, WHIT"OPS0" LOGO
	I5 CONNECTOR	1	C48 THE ORIGINAL CONNECTOR
	IN MOLD	4.5g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)
②	OVER MOLD	1g	IP-5 MATERIAL: PC APPLE WHITE, PIINT GRAY USB LOGO(15 SURFACE) WHIT PROTECTIVE FILM
	CONNECTOR	1	USB A MALE SHORT BODY SOLID TYPE, WHIT A TIN COP PEARL NICKEL PLATED FINE BRIDING LINE, WHITE INSULATION RATED TEMPERATURE 250-270, PIN G/F, BETWEEN 4P WHIT SHIELD IS SHORT, Iphone DEDICATED
①	CALBE	1	3C+3D+1500D Huang Densi+144 BRAID+AL 002.6mm, TPE APPLE WHITE DULL PULISH JACKET
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWED	Andy	DRAWING NO	
CHECKED		CUSTOMER	CNC
APPROVAL		ITEM NO.	104-1030-WH-000
DECIDED		DATE	2014-10-27
VERSIONS/EDITION	A/0	PROJECTION	

