

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[FCI](#)
[10129368-001C-TRLF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	DIM A	DIM A1 REF	DIM B	DIM B1 REF	DIM C	DIM D	DIM E	METAL CLIP	PLATING	PICK-UP CAP	PACKAGING	REMARKS	PRODUCT NUMBER	PLATING
10129368-001LF	0.4	2.35	0.6	3.37	1.85	2.3	1.0	2 PCS	NOTE [2]	NO	TRAY	NOTE [8]	10129368-301LF	NOTE [10]
10129368-001CLF										YES		NOTE [4] & [8]	10129368-301CLF	
10129368-001C-TRLF										YES		NOTE [4] [6] & [8]	10129368-301C-TRLF	
10129368-003LF	0.3	2.5	0.8	3.52	2.35	2.6	0.6	2 PCS	NOTE [2]	NO	TRAY	NOTE [8]	10129368-303LF	NOTE [10]
10129368-003CLF										YES		NOTE [4] & [8]	10129368-303CLF	
10129368-003C-TRLF										YES		NOTE [4] [6] & [8]	10129368-303C-TRLF	

NOTE [10]

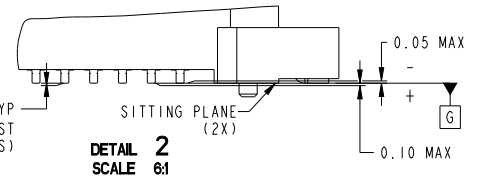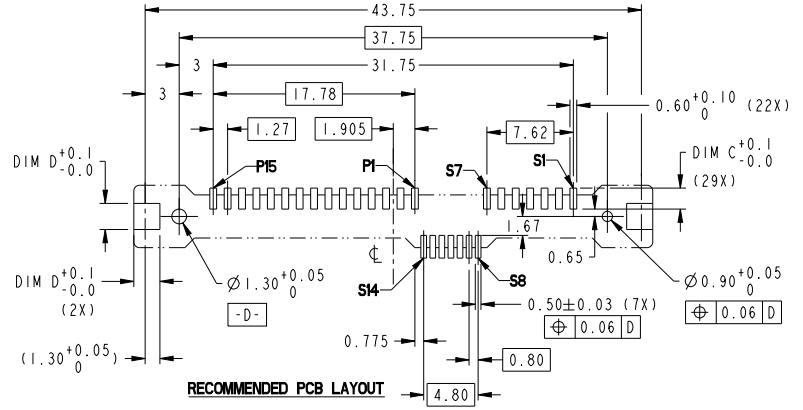

spec ref	-	dr	Vijay P-N	2016/05/08	projection	mm	size	A3	scale	3:1
tolerance std	ISO 406 ISO 1101	eng	Koon-Pak Tay	2016/05/05	chr	-	ecm no	ELX-S-24023-1	rel level	Released
	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2016/05/27	product family	SAS				
surface	ISO 1302	linear	0.X	±-	Amphenol FCI SAS RECEPTACLE VERTICAL SMT TYPE ASSY cat. no.		10129368		rev B	
			0.XX	±0.20						
			0.XXX	±-						
		angular	0°	±2°	Product - Customer Drw		sheet 2 of 3			

Doc File - REV E - 2016-02-12

1

2

3

PDS: Rev B

STATUS: Released

Printed: May 27, 2016

A

B

C

D

A

B

C

D

A

B

C

D

PRODUCT NUMBER
SEE TABLE

NOTES:

1. MATERIAL :
1) HOUSING : HIGH TEMP THERMOPLASTIC, UL 94V-0
COLOR : BLACK
2) TERMINAL : COPPER ALLOY
3) HOLD DOWN : COPPER ALLOY
2. FINISH :
1) TERMINAL : 30μ" Au PLATING (CONTACT POINT) OVER 50μ" NICKEL
2) SOLDER TAIL : 100μ" MIN Sn OVER 50μ" NICKEL
3) HOLD DOWN : 100μ" MIN Sn OVER 50μ" NICKEL
3. PER SFF REV 1.1, EXCEPT 0.8mm PITCH BUMP AREA.
4. PART WITH PICK-UP CAP, P/N XXXXXXXX-XXXCLF.
5. THE STD PACKAGING IS IN TRAY UNLESS OTHERWISE SPECIFIED.
6. PART NUMBER WITH SUFFIX "-TR" MEANS FOR TAPE & REEL PACKAGING (E.G. P/N: XXXXXXXX-XXXC-TRLF).
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
9. PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 8 LEAD FREE IDENTIFICATION
10. FINISH :
1) TERMINAL : 30μ" GXT PLATING (CONTACT POINT) OVER 50μ" NICKEL
2) SOLDER TAIL : 100μ" MIN Sn OVER 50μ" NICKEL
3) HOLD DOWN : 100μ" MIN Sn OVER 50μ" NICKEL
11. 10129368-X03LF FOOTPRINT IS SAME AS 10120818-X01LF
12. A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
13. DATE CODE LOCATION. DATE CODE NO. YYWWD (E.G. 14225)

spec ref		-		dr		Viggo P-N		201408058		projection				mm		size		A3		scale		3:1			
tolerance std		ISO 406		eng		Koon-Pak Tay		201605095						ecn no		ELX-S-24023-1		rel level		Released					
ISO 1101		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-																			
				appr		Chen-Hong Tan		201605027		product family												SAS			
surface		linear		0.X		±				title				SAS RECEPTACLE		dwg no		10129368		rev		B			
				0.XX		±0.20																		VERTICAL SMT TYPE ASSY	
				0.XXX		±																			
ISO 1302		angular		0°		±2°		www.fci.com		cat. no.				-		Product - Customer Drw		sheet 3 of 3							

Doc File - REV E - 2014-02-12

1

2

3

PDS: Rev B

STATUS: Released

Printed: May 27, 2016

A

B

C

D