

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[10106124-B006001LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2

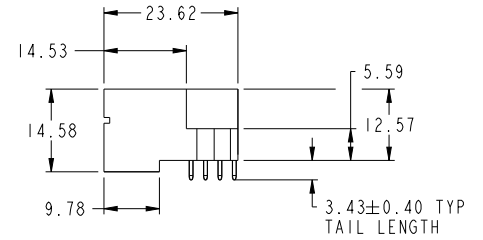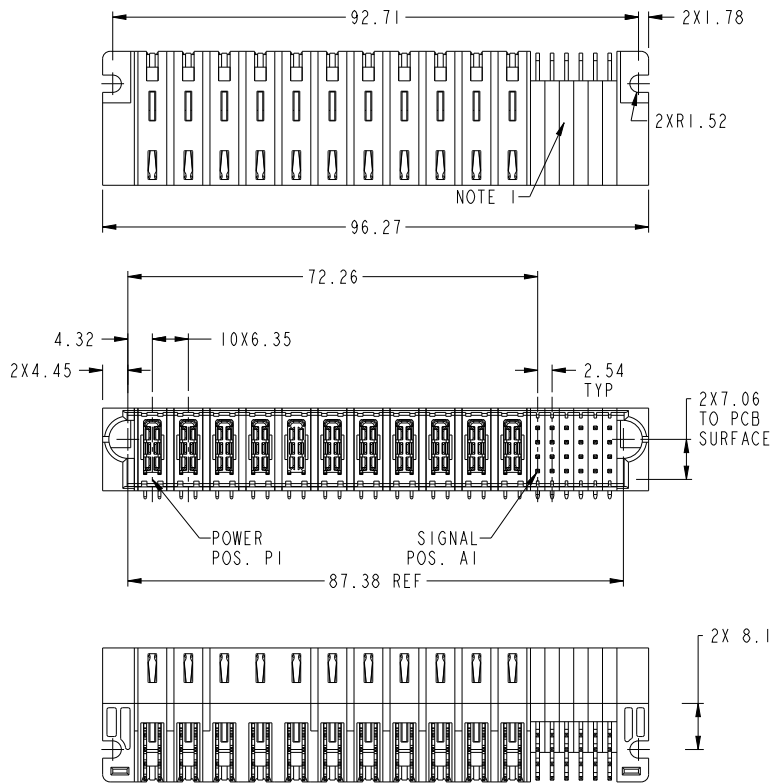

spec ref	*	dr	Peng-Bing Fu	2012/08/20	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/08/20	chr	-	ecm no	-	rel level	Released
surface	linear	appr	Pai-Ming Zhang	2013/03/25	product family	PwrBlade+	cat. no.	10106124-B006001	rev	A
ASME Y14.5	angular	0°	±2°	www.fci.com	RA STB HEADER	Product - Customer Drw	sheet 1 of 3			

Print Date - REV C - 2009-04-09

1

2

3

PDS: Rev A

STATUS: Released


Printed: Mar 25, 2013

PRODUCT NO.	ROWS	HIGH POWER											SIGNAL						
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6
10106124-B006001LF	DCBA	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH

10106124-B006001LF

DCBA

H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

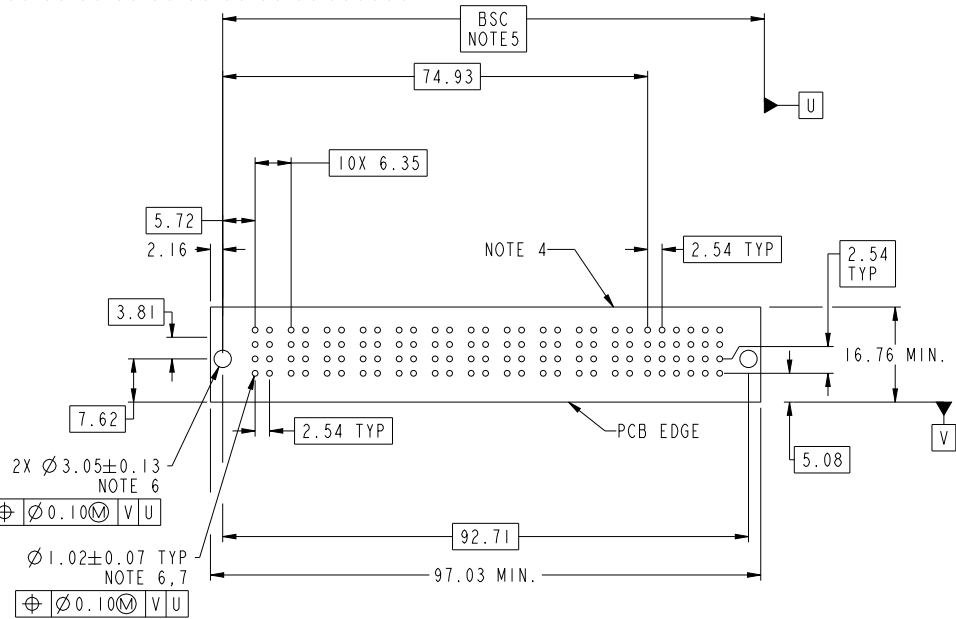

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HI	STD HIGH POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Peng-Bing Fu	2012/08/20	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/05/25			ecm no			
chr					rel level			
appr	Pai-Ming Zhang	2013/05/25	product family	PwrBlade+				
www.fci.com				cat. no.	Product - Customer Drw	sheet 2 of 3		

PDS: Rev :A

STATUS:Released

Printed: Mar 25, 2013

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

dr	Peng-Bing Fu	20130305	projection 	MM 	size	A3	scale	3:2
eng	Peng-Bing Fu	20130305			ecn no	-		
chr	-	-						
appr	Pai-Ming Zheng	20130305	product family	PwrBlade+	rel level	Released		
			IIP + 24S		dwg no	10106124-B006001		rev
www.fci.com			RA STB HEADER				A	
cat. no.			Product - Customer Drw				sheet 3 of 3	