

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[10106262-7006001LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com





PRODUCT NUMBER SEE SHEET 2

A

B

C

D

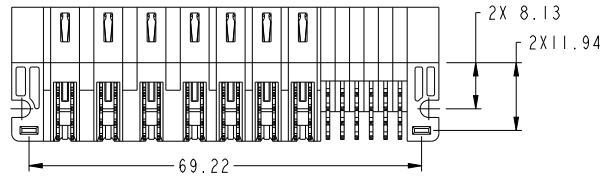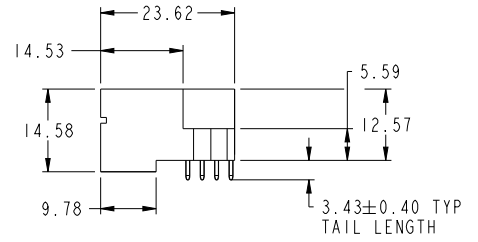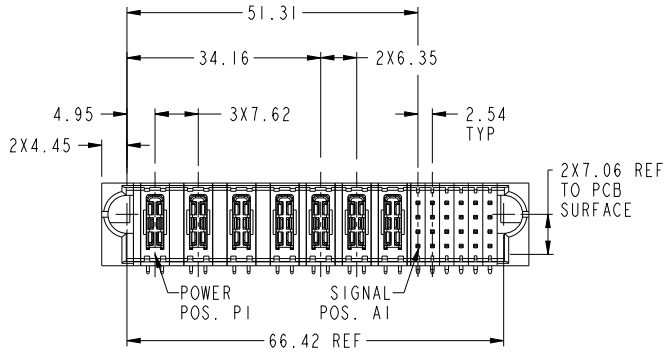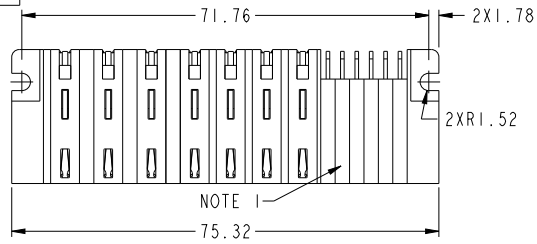

spec ref	*	dr	Peng-Bing Fu	20130919	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	20130423	chr		ecn no			
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pai-Ming Zhang	20130423	product family	PwrBlade+	rel level		Released	
surface	linear	0.X	±0.5		title	3ACP+4H +24S	eng no	10106262-7006001	rev	A
		0.XX	±0.25		www.fci.com	cat. no.				
		0.XXX	±0.10							
	angular	0°	±2°							

Prod File - REV C - 2009-04-29

1

2

3

PDS: Rev :A

STATUS:Released

Printed: Apr 25, 2013



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

dr	Peng-Bing Fu	20130519	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	20130423			ecn no	-	rel level	
chr	-	-			Released			
appr	Pai-Ming Zhang	20130423	product family	PwrBlade+				
			title 3ACP+4H +24S RA STB HEADER		eng no 10106262-7006001	rev A		
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			



Copyright FCI.