

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[10106269-2006202LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2

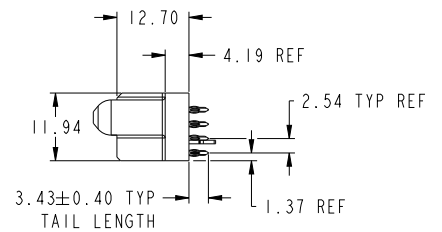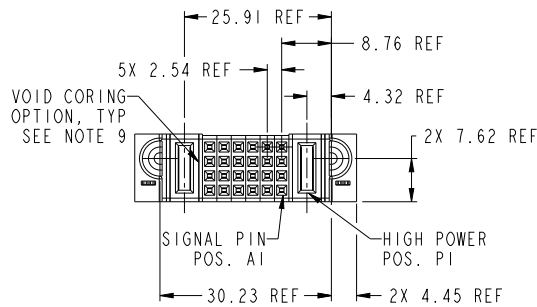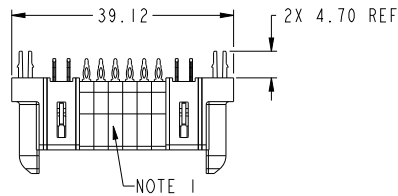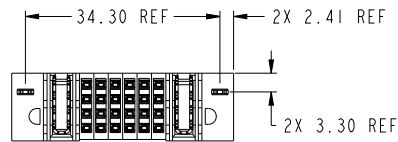

spec ref	dr	Hebin Zhang	201306020	projection	MM	size	A3	scale	3:2
tolerance std	eng	Xin Bob	201402010	chr	-	ecm no	-	rel level	Released
ASME Y14.5	chr	-	-	appr	Pai-Ming Zhang	201402010	product family	PowerBlade+	rel level
surface	linear	0.X	±0.50	FCI	10106269-2006202	rev	A	cat. no.	Product - Customer Drw
ASME Y14.5	angular	0°	±2°	www.fci.com	VT PRESSFIT RECEPTACLE	cat. no.	Product - Customer Drw	sheet 1 of 3	Printed: Jan 10, 2014

Print Date - REV C - 2009-04-09

1

2


3

PDS: Rev :A

STATUS:Released

Printed: Jan 10, 2014

CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HA	METAL HOLD DOWN
HG	STD HIGH POWER CONTACT (3.43)

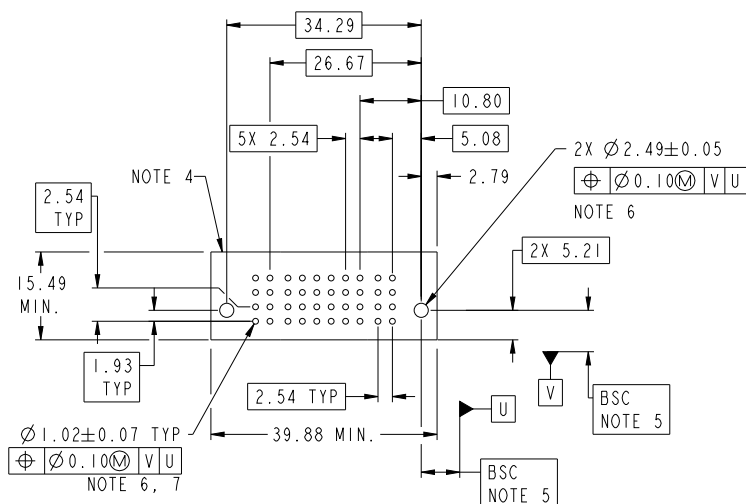

dr	Heisen Zhang	201306080	projection  MM 	size	A3	scale	3:2		
eng	Xie Bob	201402150		ecr no					
chr	-	-							
appr	Pai-Ming Zhang	201402150	product family		PowerBlade+	rel level	Released		
			title	IHP + 24S + IHP VT PRESSFIT RECEPTACLE		dag no	10106269-2006202	rev	A
www.fci.com			cat no	Product - Customer Drw		sheet 2 of 3			

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10123565
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) $1.15 \pm 0.025\text{MM}$ DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER $0.0254\text{-}0.0762\text{MM}$ Cu PLATING TO ACHIEVE A $1.02 \pm 0.07\text{MM}$ HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Helen Zhang	201306020			size	A3	scale	1:1
eng	Xin Bob	201402010			ecm no			
chr	-	-						
appr	Pai-Ming Zhang	201402010	product family	PowerBlade+	rel level	Released		
			title		dwg no	10106269-2006202	rev	A
			IHP + 24S + IHP					
			VT PRESSFIT RECEPTACLE					
www.fci.com			cat. no.		Product - Customer Drw			sheet 3 of 3