

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Delta Electronics](#)

[DSTL-0829-05](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SOLENOID PRODUCT SPECIFICATION


PART No.	VOLTAGE	DUTY CYCLE	POWER (W)	CURRENT (A)	DCR (Ω) *
DSTL-0829-24	24 VDC	100%	76	3.2	7.5
DSTL-0829-18	18 VDC	100%	72	4	4.5
DSTL-0829-12	12 VDC	100%	72	6	2
DSTL-0829-09	9 VDC	100%	73	8.2	1.1
DSTL-0829-05	5 VDC	100%	70	13.8	0.36

* OPERATION: POWER TO PULL

* DCR VALUES ARE $\pm 10\%$ AT 25°C

* WEIGHT ARE 102 GRAMS $\pm 10\%$

1. MECHANICAL DIMENSIONS :

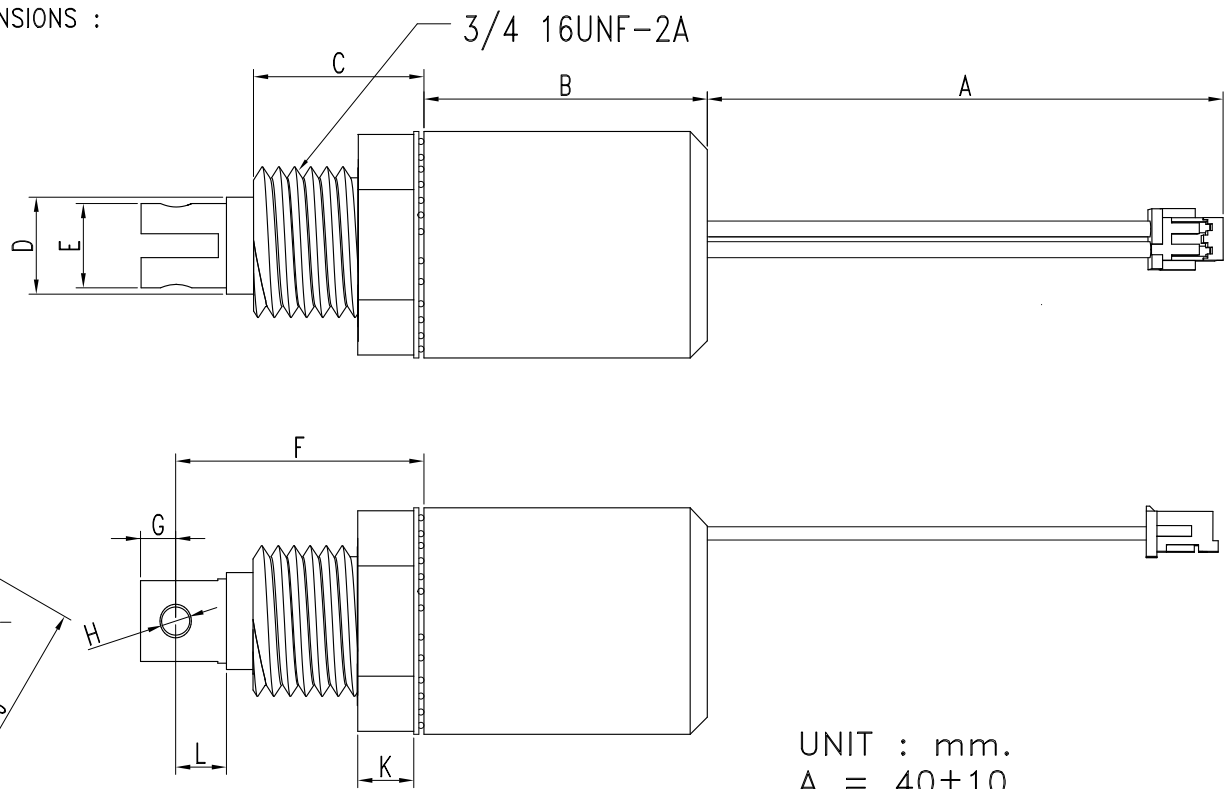

Connector : TYCO
HOUSING : AMP 179228-2
CONTACT PIN : AMP 179227-1
CABLE : AWG 24 UL 1007

UNIT : mm.

A = 40 ± 10

B = 29.0 MAX.

C = 9.5 ± 0.3

D = $\phi 11.1 \pm 0.05$

E = 7.8 ± 0.1

F = 19.05 ± 0.5

G = 4.8 ± 0.3

H = $\phi 2.4 \pm 0.1$

I = $\phi 25.4$ REF.

J = 22.20 REF.

K = 4.0 ± 0.5

L = 3.5 REF.

