

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sunon](#)

[MB60201V2-000U-A99](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**SUNON**



60x60x20 mm

16.5~25.5 CFM



|                    | Bearing | Rating        | Power        | Power               | Speed | Air        | Static                           | Noise | Weight | Curve |
|--------------------|---------|---------------|--------------|---------------------|-------|------------|----------------------------------|-------|--------|-------|
|                    | ● VAPO  | Voltage (VDC) | Current (mA) | Consumption (WATTS) | (RPM) | Flow (CFM) | Pressure (Inch-H <sub>2</sub> O) | (dBA) | (g)    |       |
| MB60201VX-0000-A99 | ●       | 12            | 210          | 2.52                | 5100  | 25.5       | 0.24                             | 39.0  | 51.0   | 1     |
| MB60201V1-0000-A99 | ●       | 12            | 135          | 1.62                | 4500  | 23.0       | 0.18                             | 33.5  | 51.0   | 2     |
| MB60201V2-0000-A99 | ●       | 12            | 79           | 0.95                | 3700  | 19.0       | 0.14                             | 29.0  | 51.0   | 3     |
| MB60201V3-0000-A99 | ●       | 12            | 50           | 0.60                | 3000  | 16.5       | 0.10                             | 23.0  | 51.0   | 4     |
| MB60202VX-0000-A99 | ●       | 24            | 115          | 2.76                | 5100  | 25.5       | 0.24                             | 39.0  | 51.0   | 1     |
| MB60202V1-0000-A99 | ●       | 24            | 75           | 1.80                | 4500  | 23.0       | 0.18                             | 33.5  | 51.0   | 2     |
| MB60202V2-0000-A99 | ●       | 24            | 48           | 1.16                | 3700  | 19.0       | 0.14                             | 28.0  | 51.0   | 3     |
| MB60202V3-0000-A99 | ●       | 24            | 33           | 0.80                | 3000  | 16.5       | 0.10                             | 23.0  | 51.0   | 4     |

| Model              |   | (VDC) | (mA) | (WATTS) | (RPM) | (CFM) | (Inch-H <sub>2</sub> O) | (dBA) | (g)  | Curve |
|--------------------|---|-------|------|---------|-------|-------|-------------------------|-------|------|-------|
| EB60201S1-0000-999 | ○ | 12    | 153  | 1.84    | 4500  | 23.0  | 0.18                    | 33.5  | 51.0 | 2     |
| EB60201S2-0000-999 | ○ | 12    | 89   | 1.07    | 3700  | 19.0  | 0.14                    | 28.0  | 51.0 | 3     |
| EB60201S3-0000-999 | ○ | 12    | 58   | 0.70    | 3000  | 16.5  | 0.10                    | 23.0  | 51.0 | 4     |

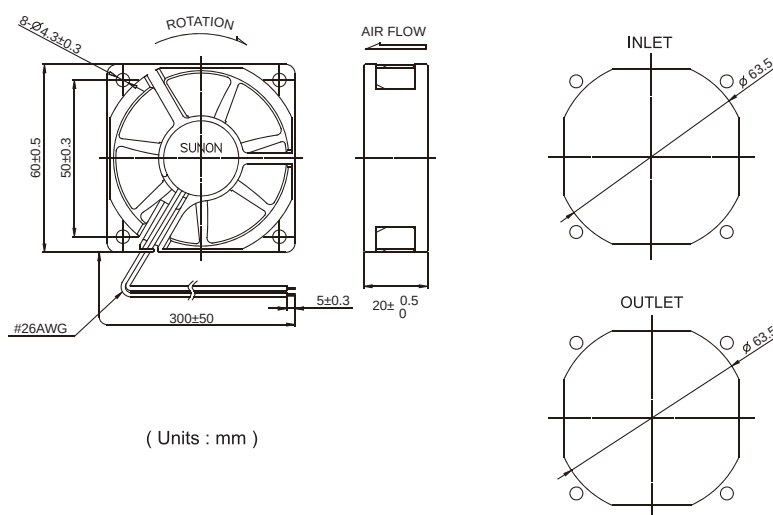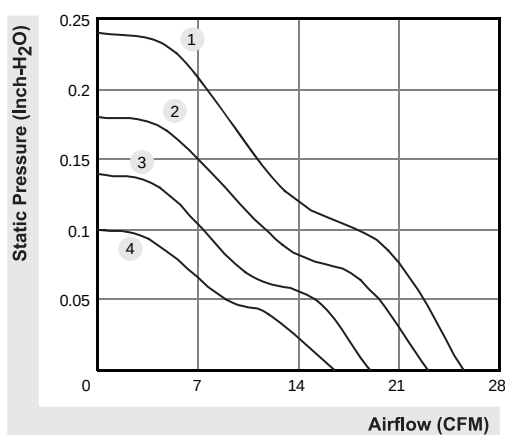

\*All model could be customized. Please contact with Sunon Sales.

\*Specifications are subject to change without notice. Please Visit SUNON web site at <http://www.sunon.com> for update information.