

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ADT-2580-NM-SMM-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING: STAINLESS STEEL PER
ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD
ALLOY C172, PER ASTM-B194.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER

2.0 PLATING:

- 2.1 HOUSING & NUTS: PASSIVATED PER MIL-F-14072
AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204,
TYPE II, CLASS 2.


3.0 ELECTRICAL SPECIFICATION:

- 3.1 FREQUENCY RANGE: DC to 18.0 GHz
- 3.2 VSWR (MAXIMUM):
DC to 4.0 GHz: 1.04:1
4.0 to 8.0 GHz: 1.07:1
8.0 to 18.0 GHz: 1.12:1

4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

5.0 MARKING: MARK UNIT AS SHOWN

(REF.; INK-02669-27-05)

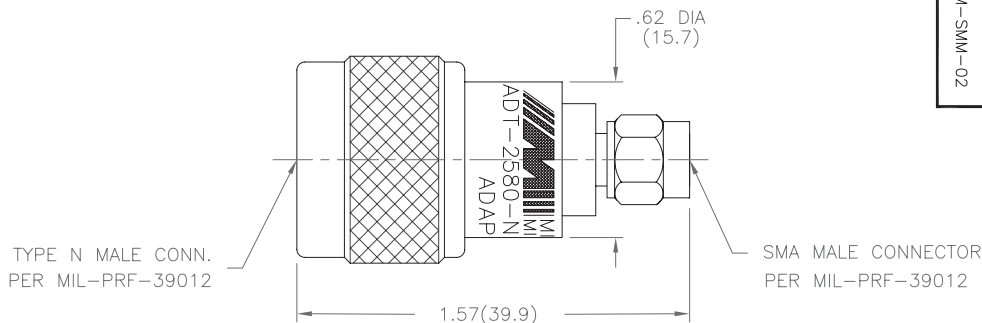

DWG NO. WAS: 02413-01-00

REV.	DESCRIPTION	DATE
1	RELEASED	8/9/78
A	ECR 6545	6/28/89
B	REDRAW ON CAD	3/31/92
B1	ADDED TITLEBLOCK	3/9/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ± 1/64 PARALLELITY: T.J.R. FLATNESS: T.J.R. CONCENTRICITY: T.J.R. ANGLES AND PERPENDICULARITY: ±1°		GAGE CODE 34078		MIDWEST MICROWAVE	
				TITLE TYPE N MALE TO SMA MALE ADAPTER OUTLINE DRAWING	
DSNR/DATE A.BEATTY 3/30/92		ENG./DATE A.OSGA 4/15/92		DRAWING NUMBER ADT-2580-NM-SMM-02-01	
CHECKED/DATE		APPROVED/DATE		REV. B1	
SCALE: 2=1		SHEET 1 of 1			