

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ADT-2826-FF-TNC-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.

2.0 PLATING:

- 2.1 HOUSING: PASSIVATED PER MIL-F-14072 AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 FREQUENCY RANGE: DC to 18.0 GHz


3.2 VSWR (MAX):

DC to 4.0 GHz: 1.05:1
4.0 to 8.0 GHz: 1.10:1
8.0 to 18.0 GHz: 1.15:1


- 3.3 IMPEDANCE: 50 OHMS

4.0 MARKING:

MARK UNIT AS SHOWN
(REF.: INK-02638-27-12)

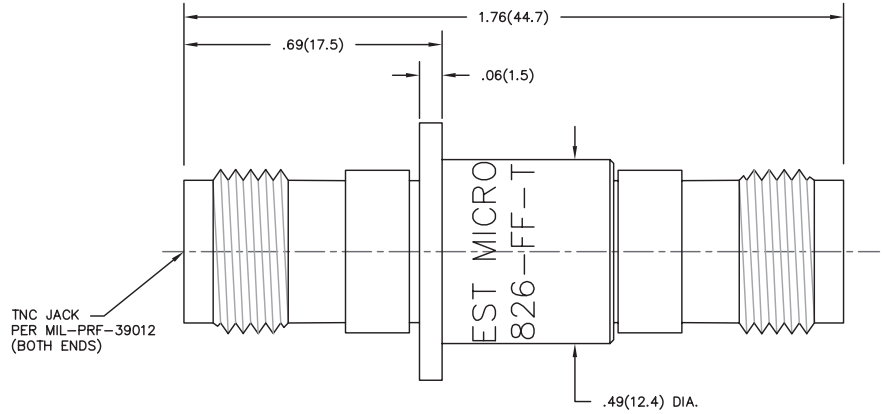

TNC JACK
PER MIL-PRF-39012
(BOTH ENDS)

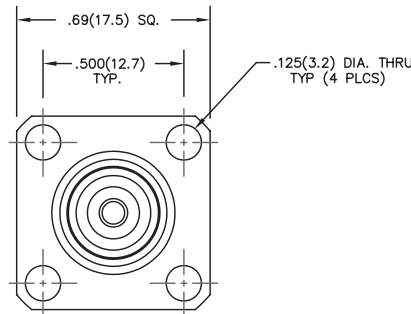

END VIEW
NOT TO SCALE

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005

2 PLACE DECIMALS ±.02

FRACTIONS ±1/64

PARALLELITY: T.I.R.

FLATNESS: T.I.R.

CONCENTRICITY: T.I.R.

ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078		MIDWEST MICROWAVE	
		TITLE ADAPTER TNC JACK TO TNC JACK FLANGE MOUNT OUTLINE DRAWING	
		DRAWING NUMBER ADT-2826-FF-TNC-02-01	
DESIGN/DATE A. BEATTY 2/27/95	ENG/DATE A. OSGA 3/8/95	REV. -1	
CHECKED/DATE P. GOODMAN 3/2/95	APPROVED/DATE	SCALE: 5=1 SHEET 1 of 1	

MODEL NUMBER
ADT-2826-FF-TNC-02

REV.	DESCRIPTION	DATE
1	RELEASED	3/8/95
1	ADDED TITLE BLOCK	3/17/05