

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Cinch Connectivity Solutions](#)
[TRM-2010-MC-SMA-07](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 18.0 GHz
 - 1.2 MAXIMUM INPUT POWER: 5 WATTS AVG. AT +40°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
 - 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
 - 1.4 IMPEDANCE: 50 OHMS
 - 1.5 MAXIMUM VSWR: 1.05 +0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN.
(REF.: INK-01526-27-02)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

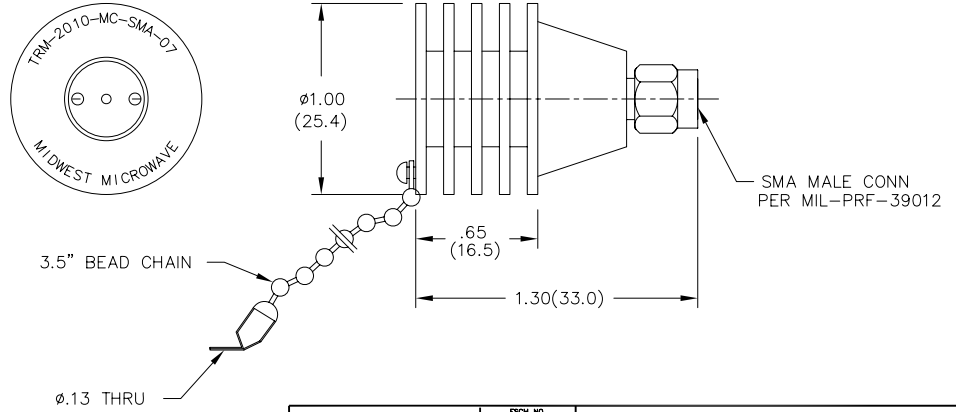

MODEL NUMBER	REV.
TRM-2010-MC-SMA-07	A1

REV.	DESCRIPTION	DATE
1	RELEASED	3/25/92
A	ECN 15506	9/23/96
A1	ADDED TITLEROOK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FIG. NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION
	DRAWN/DATE A. BEATTY 3/17/92	ENG/DATE G. KOZAK 3/25/92	DRAWING NUMBER TRM-2010-MC-SMA-07
	CHECKED/DATE	APPROVED/DATE	SCALE: 2=1 SHEET 1 of 1