

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[TRM-2071-FC-NNN-07](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 4.0 GHz
- 1.2 VSWR: 1.25:1 MAX.
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 POWER: 2 WATTS AVG. AT +25°C
DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICRSECOND PULSE WIDTH).
- 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-02611-27-43)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

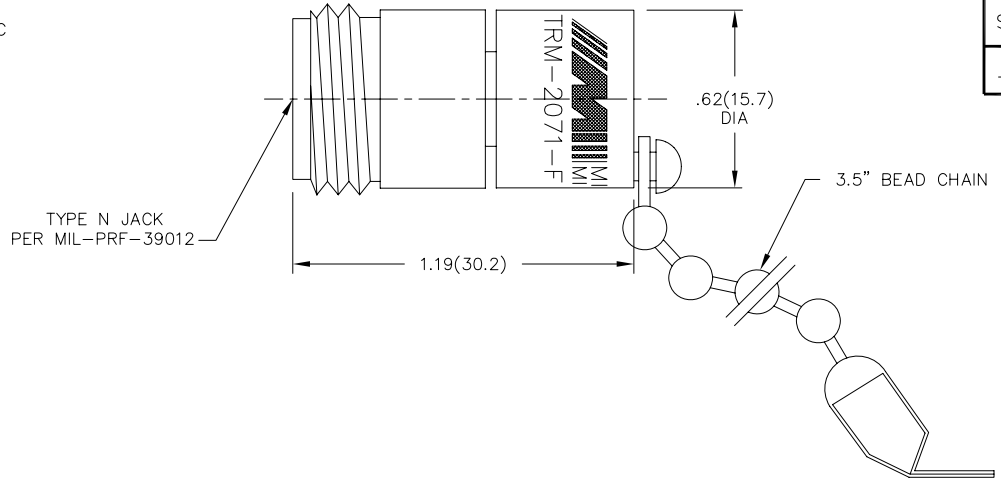

DATE	DESCRIPTION	REV.
8/12/93	RELEASED	1
10/28/93	ADDED TITLE BLOCK	-1

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FROM NO. 34078	MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION
DRAWN/DATE A. BEATTY 8/4/93		ENG/DATE G. KOZAK 8/10/93		DRAWING NUMBER TRM-2071-FC-NNN-07
CHECKED/DATE M. HOLLMAN 8/6/93		APPROVED/DATE		SCALE: 3=1 SHEET 1 of 1