

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[TRM-2071-M0-NNN-07](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 4.0 GHz
- 1.2 VSWR: 1.25:1 MAX.
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 POWER: 2 WATTS AVG. AT +25°C
DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICROSECOND
PULSE WIDTH).
- 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN:
(REF.: INK-02611-27-44)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

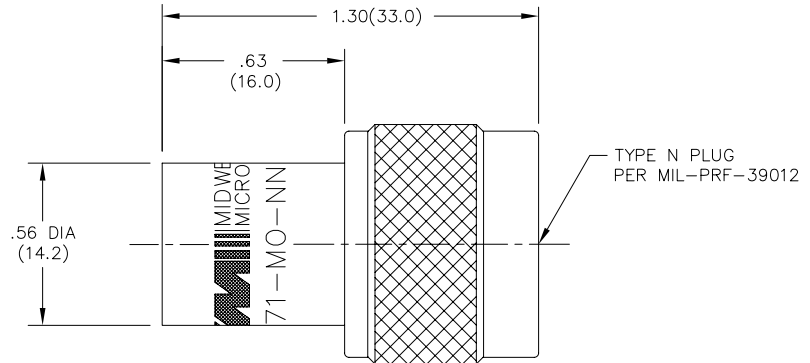

REV.	DESCRIPTION	DATE
1	RELEASED	8/12/93
1	ADDED TITLE BLOCK	10/28/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FROM NO.		34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave				TITLE TERMINATION	
	DRAWN/DATE A.BEATTY 8/4/93		ENG./DATE G.KOZAK 8/10/93			
	CHECKED/DATE M.HOLLMAN 8/6/93		APPROVED/DATE			
3 PLACE DECIMALS ±.005						
2 PLACE DECIMALS ±.02						
FRACTIONS ±1/64						
PARALLELITY: T.I.R. _____						
FLATNESS: T.I.R. _____	DRAWING NUMBER TRM-2071-MO-NNN-07					
CONCENTRICITY: T.I.R. _____						
ANGLES AND PERPENDICULARITY: ±1°	SCALE: 3=1					
	SHEET 1 of 1					