

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Nichicon](#)
[UPW0J220MDD](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon



UPW

Miniature Sized, Low Impedance,
High Reliability For
Switching Power Supplies



Smaller Low Impedance Long Life Anti-Solvent Feature (Through 100V only)


- Smaller case size and lower impedance than UPM.
- Low impedance and high reliability withstanding 2000 hours to 8000 hours.
- Capacitance ranges available based on the numerical values in E12 series under JIS.
- Compliant to the RoHS directive (2011/65/EU).

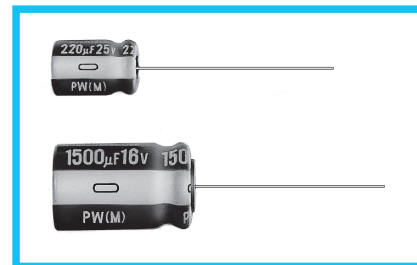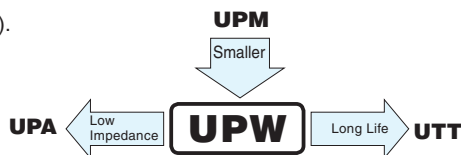

Specifications

Item	Performance Characteristics												
Category Temperature Range	-55 to +105°C (6.3 to 100V), -40 to + 105°C (160 to 400V), -25 to +105°C (450V)												
Rated Voltage Range	6.3 to 450V												
Rated Capacitance Range	0.47 to 15000μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	Rated voltage (V)	6.3 to 100						160 to 450					
	Leakage current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.						CV ≤ 1000 : I = 0.1CV+40 (μA) max. CV > 1000 : I = 0.04CV+100 (μA) max.					
Tangent of loss angle (tan δ)	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. Measurement frequency : 120Hz at 20°C												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 · 350	400 · 450	
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.20	0.25	
Stability at Low Temperature	120Hz												
	Rated voltage (V)			6.3 · 10	16 · 25	35 · 50	63 · 100	160 · 200	250	315 · 350	400	450	
	Impedance ratio (MAX.)	Z-25°C / Z+20°C			—	—	—	—	3	3	4	6	15
		Z-40°C / Z+20°C			—	—	—	—	4	6	8	10	—
Z-55°C / Z+20°C			3	3	3	3	—	—	—	—	—	—	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 8000 hours (2000 hours for φD=4, 5 and 6.3, 3000 hours for φD=8, 5000 hours for φD=10, 7000 hours for φD=12.5) at 105°C, the peak voltage shall not exceed the rated voltage.												
	Capacitance change		Within ±20% of the initial capacitance value										
	tan δ		200% or less than the initial specified value										
	Leakage current		Less than or equal to the initial specified value										
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.												
Marking	Printed with white color letter on dark brown sleeve.												


Radial Lead Type

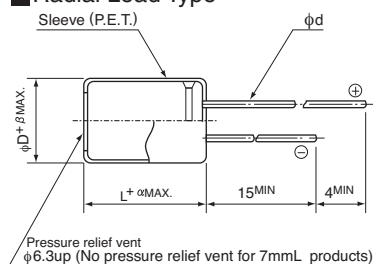

α	(L = 7) 1.0											
	(L < 20) 1.5											
	(L ≥ 20) 2.0											
		(mm)										
φD		4	5	6.3	8	10	12.5	16	18	20	22	25
P		1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
φd		0.45	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
				(0.45)			※0.8					
β		0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

※: Applied to L>25 products
(): Applied to 7mmL products

Type numbering system (Example : 10V 680µF)

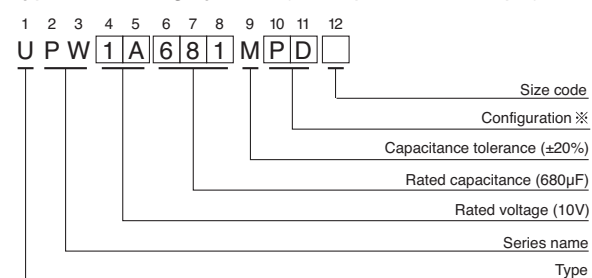

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4 · 5	DD
6.3	ED (7mm L : DD)
8 · 10	PD
12.5 to 18	HD
20 to 25	RD

• Please refer to page 20 about the end seal configuration.

Frequency coefficient of rated ripple current

V	Cap. (µF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
6.3 to 100		0.47 to 56	0.20	0.30	0.50	0.80	1.00
		68 to 330	0.55	0.65	0.75	0.85	1.00
		390 to 1000	0.70	0.75	0.80	0.90	1.00
		1200 to 15000	0.80	0.85	0.90	0.95	1.00
160 to 450		0.47 to 220	0.80	1.00	1.25	1.40	1.60
		330 to 470	0.90	1.00	1.10	1.13	1.15

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

• Dimension table in next page.

ALUMINUM ELECTROLYTIC CAPACITORS

UPW

■ Standard Ratings

V (Code)		6.3 (0J)				10 (1A)			
Cap.(μF)	Item Code	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mA _{rms}) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mA _{rms}) 105°C / 100kHz
			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
22	220	5 × 11	0.60	1.20	180	5 × 11 ▲ 4 × 7	0.60 2.00	1.20 5.00	180 65
27	270	4 × 7	2.00	5.00	65				
33	330	5 × 11 ▲ 5 × 7	0.60 0.95	1.20 2.40	180 120	5 × 11 ▲ 5 × 7	0.60 0.95	1.20 2.40	180 120
39	390					5 × 7	0.95	2.40	120
47	470	5 × 11 ▲ 5 × 7	0.60 0.95	1.20 2.40	180 120	5 × 11 ▲ 4 × 11	0.60 1.30	1.20 2.60	180 120
56	560	5 × 7	0.95	2.40	120				
68	680	4 × 11	1.30	2.60	120				
82	820					5 × 11 ▲ 6.3 × 7	0.60 0.45	1.20 1.20	180 200
100	101	5 × 11	0.60	1.20	180	5 × 11 ▲ 5 × 15	0.60 0.50	1.20 1.00	180 235
120	121	6.3 × 7	0.45	1.20	200				
150	151	6.3 × 11 ▲ 5 × 15	0.25 0.50	0.50 1.00	290 235	6.3 × 11	0.25	0.50	290
180	181					6.3 × 11	0.25	0.50	290
220	221	6.3 × 11	0.25	0.50	290	6.3 × 11 ▲ 6.3 × 15	0.25 0.23	0.50 0.46	290 430
330	331	6.3 × 11 ▲ 6.3 × 15	0.25 0.23	0.50 0.46	290 430	8 × 11.5	0.117	0.234	555
470	471	8 × 11.5	0.117	0.234	555	8 × 11.5	0.117	0.234	555
560	561	8 × 11.5	0.117	0.234	555				
680	681	10 × 12.5	0.090	0.180	755	10 × 12.5 ▲ 8 × 15	0.090 0.085	0.180 0.170	760 730
820	821	8 × 15 ▲ 10 × 12.5	0.085 0.090	0.170 0.180	730 755				
1000	102	10 × 12.5	0.090	0.180	755	10 × 16 ▲ 8 × 20	0.068 0.065	0.136 0.130	1050 995
1200	122	8 × 20 ▲ 10 × 16	0.065 0.068	0.130 0.136	995 1050	10 × 20	0.052	0.104	1220
1500	152	10 × 20	0.052	0.104	1220	10 × 20 ▲ 10 × 25	0.052 0.045	0.104 0.090	1220 1440
2200	222	12.5 × 20 ▲ 10 × 25	0.038 0.045	0.076 0.090	1655 1440	12.5 × 20 ▲ 10 × 31.5	0.038 0.035	0.076 0.070	1655 1815
2700	272	10 × 31.5	0.035	0.070	1815	12.5 × 25	0.030	0.060	1945
3300	332	12.5 × 20	0.038	0.076	1655	12.5 × 25 ▲ 12.5 × 31.5	0.030 0.025	0.060 0.050	1950 2310
3900	392	12.5 × 25	0.030	0.060	1945	12.5 × 35.5 ▲ 16 × 20	0.022 0.029	0.044 0.058	2510 2210
4700	472	16 × 25 ▲ 12.5 × 31.5	0.022 0.025	0.044 0.050	2555 2310	16 × 25	0.022	0.044	2555
5600	562	12.5 × 35.5 ▲ 16 × 20	0.022 0.029	0.044 0.058	2510 2210	16 × 25 ▲ 18 × 20	0.022 0.028	0.044 0.056	2560 2490
6800	682	16 × 25 ▲ 18 × 20	0.022 0.028	0.044 0.056	2560 2490	16 × 31.5 ▲ 18 × 25	0.018 0.020	0.036 0.040	3010 2740
8200	822	16 × 31.5	0.018	0.036	3010	16 × 35.5 ▲ 18 × 31.5	0.016 0.016	0.032 0.032	3150 3635
10000	103	16 × 31.5 ▲ 18 × 25	0.016 0.020	0.032 0.040	3150 2740	18 × 35.5	0.015	0.030	3680
12000	123	18 × 31.5	0.016	0.032	3635				
15000	153	18 × 35.5	0.015	0.030	3680	18 × 40	0.014	0.028	3800

▲ : In this case, [6] will be put at 12th digit of type numbering system.

ALUMINUM ELECTROLYTIC CAPACITORS

UPW

■ Standard Ratings

Cap. (μF)	V(Code) Code	Item	16 (1C)			25 (1E)		
			Case size φD × L (mm)	Impedance (Ω) MAX.		Case size φD × L (mm)	Impedance (Ω) MAX.	
				20°C / 100kHz	−10°C / 100kHz		20°C / 100kHz	−10°C / 100kHz
4.7	4R7					5 × 11	0.60	1.20
10	100		5 × 11	0.60	1.20	5 × 11	0.60	1.20
15	150		4 × 7	2.00	5.00	▲4 × 7	2.00	5.00
22	220		5 × 11	0.60	1.20	5 × 11	0.60	1.20
27	270		▲5 × 7	0.95	2.40	▲5 × 7	0.95	2.40
33	330		5 × 7	0.95	2.40	4 × 11	1.30	2.60
39	390		5 × 11	0.60	1.20	5 × 11	0.60	1.20
47	470		▲6.3 × 7	0.45	1.20	5 × 11	0.60	1.20
56	560		4 × 11	1.30	2.60	▲6.3 × 7	0.45	1.20
82	820		5 × 11	0.60	1.20	5 × 11	0.60	1.20
100	101		5 × 11	0.60	1.20	5 × 15	0.50	1.00
120	121		▲6.3 × 7	0.45	1.20	6.3 × 11	0.25	0.50
150	151		5 × 15	0.50	1.00	6.3 × 11	0.25	0.50
180	181		6.3 × 11	0.25	0.50	6.3 × 15	0.23	0.46
220	221		6.3 × 11	0.25	0.50	8 × 11.5	0.117	0.234
330	331		6.3 × 15	0.23	0.46	8 × 11.5	0.117	0.234
470	471		8 × 11.5	0.117	0.234	10 × 12.5	0.090	0.180
560	561		8 × 11.5	0.117	0.234	▲8 × 15	0.085	0.170
680	681		10 × 12.5	0.090	0.180	10 × 16	0.068	0.136
820	821		▲8 × 15	0.085	0.170	▲8 × 20	0.065	0.130
1000	102		10 × 16	0.068	0.136	10 × 20	0.052	0.104
1200	122		▲8 × 20	0.065	0.130	12.5 × 20	0.038	0.076
1500	152		10 × 20	0.052	0.104	▲10 × 31.5	0.035	0.070
1800	182		10 × 25	0.045	0.090	16 × 25	0.022	0.044
2200	222		12.5 × 20	0.038	0.076	▲12.5 × 25	0.030	0.060
2700	272		▲10 × 31.5	0.035	0.070	12.5 × 31.5	0.025	0.050
3300	332		10 × 25	0.045	0.090	▲16 × 20	0.029	0.058
3900	392		12.5 × 25	0.030	0.060	16 × 25	0.022	0.044
4700	472		12.5 × 31.5	0.025	0.050	▲18 × 20	0.028	0.056
5600	562		▲16 × 20	0.029	0.058	※12.5 × 35.5	0.022	0.044
6800	682		16 × 25	0.022	0.044	16 × 35.5	0.016	0.032
8200	822		▲12.5 × 35.5	0.022	0.044	▲18 × 31.5	0.016	0.032
10000	103		16 × 31.5	0.018	0.036	18 × 35.5	0.015	0.030
			▲18 × 25	0.020	0.040			
			16 × 35.5	0.016	0.032			
			▲18 × 31.5	0.016	0.032			
			18 × 35.5	0.015	0.030			
			18 × 40	0.015	0.030			
				0.014	0.028			

▲ : In this case, [6] will be put at 12th digit of type numbering system.

※ : In this case, [3] will be put at 12th digit of type numbering system.

ALUMINUM ELECTROLYTIC CAPACITORS

UPW

■ Standard Ratings

Cap.(μF)	V(Code) Item Code	35 (1V)				50 (1H)			
		Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mA _{rms}) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mA _{rms}) 105°C / 100kHz
			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
0.47	R47					5 × 11	5.00	10.0	25
1	010					5 × 11	3.50	7.00	40
2.2	2R2					5 × 11	3.00	6.00	55
3.3	3R3					5 × 11	2.60	5.20	65
4.7	4R7	5 × 11	0.60	1.20	180	5 × 11	2.30	4.60	90
6.8	6R8	4 × 7	2.00	5.00	65				
10	100	5 × 11	0.60	1.20	180	5 × 11	1.40	2.80	120
		▲ 5 × 7	0.95	2.40	120	▲ 4 × 11	2.50	5.00	90
12	120	5 × 7	0.95	2.40	120				
18	180	4 × 11	1.30	2.60	120	5 × 11	1.30	2.60	155
22	220	5 × 11	0.60	1.20	180	5 × 11	1.20	2.40	170
27	270	5 × 11	0.60	1.20	180	5 × 15	0.90	1.80	215
		▲ 6.3 × 7	0.45	1.20	200				
33	330	5 × 11	0.60	1.20	180	6.3 × 11	0.43	0.86	300
39	390	5 × 15	0.50	1.00	235				
47	470	6.3 × 11	0.25	0.50	290	6.3 × 11	0.43	0.86	300
56	560	6.3 × 11	0.25	0.50	290	6.3 × 15	0.40	0.80	360
82	820	6.3 × 15	0.23	0.46	430	8 × 11.5	0.234	0.468	485
100	101	8 × 11.5	0.117	0.234	555	8 × 11.5	0.234	0.468	485
120	121					8 × 15	0.155	0.310	635
						▲ 10 × 12.5	0.162	0.324	620
150	151	8 × 11.5	0.117	0.234	555	10 × 12.5	0.162	0.324	615
180	181					8 × 20	0.120	0.240	860
						▲ 10 × 16	0.119	0.238	850
220	221	10 × 12.5	0.090	0.180	760	10 × 16	0.119	0.238	850
		▲ 8 × 15	0.085	0.170	730	▲ 10 × 20	0.090	0.180	1030
270	271					10 × 25	0.082	0.164	1200
330	331	10 × 16	0.068	0.136	1050	10 × 20	0.090	0.180	1030
		▲ 8 × 20	0.065	0.130	995	▲ 10 × 31.5	0.060	0.120	1610
390	391	10 × 20	0.052	0.104	1220	12.5 × 20	0.063	0.126	1480
470	471	10 × 20	0.052	0.104	1220	12.5 × 20	0.060	0.120	1500
560	561	10 × 25	0.045	0.090	1440	12.5 × 25	0.050	0.100	1832
680	681	12.5 × 20	0.038	0.076	1660	12.5 × 25	0.050	0.100	1840
		▲ 10 × 31.5	0.035	0.070	1815	▲ 16 × 20	0.048	0.096	1840
820	821					12.5 × 35.5	0.034	0.068	2290
						▲ 18 × 20	0.042	0.084	2420
1000	102	12.5 × 25	0.030	0.060	1950	16 × 25	0.034	0.068	2235
1200	122	12.5 × 31.5	0.025	0.050	2310	16 × 31.5	0.028	0.056	2700
		▲ 16 × 20	0.029	0.058	2210	▲ 18 × 25	0.029	0.058	2610
1500	152	16 × 25	0.022	0.044	2555	16 × 31.5	0.028	0.056	2700
		▲ 12.5 × 35.5	0.022	0.044	2510	▲ 16 × 35.5	0.025	0.050	2790
1800	182	16 × 25	0.022	0.044	2555	18 × 31.5	0.025	0.050	3000
		▲ 18 × 20	0.028	0.056	2490				
2200	222	16 × 31.5	0.018	0.036	3010	18 × 35.5	0.023	0.046	3100
		▲ 18 × 25	0.020	0.040	2740				
2700	272	16 × 35.5	0.016	0.032	3150				
		▲ 18 × 31.5	0.016	0.032	3635				
3300	332	18 × 35.5	0.015	0.030	3680				
4700	472	18 × 40	0.014	0.028	3800				

▲: In this case, [6] will be put at 12th digit of type numbering system.

ALUMINUM ELECTROLYTIC CAPACITORS

UPW

Standard Ratings

Cap.(μF)	V(Code)	Code	Item	63 (1J)			100 (2A)		
				Case size φD × L (mm)	Impedance (Ω) MAX.		Case size φD × L (mm)	Impedance (Ω) MAX.	
					20°C / 100kHz	-10°C / 100kHz		20°C / 100kHz	-10°C / 100kHz
0.47	R47						5 × 11	43.0	86.0
1	010						5 × 11	20.0	40.0
2.2	2R2						5 × 11	9.80	19.6
3.3	3R3						5 × 11	6.60	13.2
4.7	4R7			5 × 11	4.70	9.40	5 × 11	4.60	9.20
6.8	6R8			5 × 11	2.50	5.00	5 × 11	3.50	7.00
				▲ 4 × 11	3.50	7.00			
10	100			5 × 11	2.10	4.20	6.3 × 11	1.80	3.60
12	120			5 × 11	2.00	4.00			
15	150			6.3 × 11	1.20	2.40	8 × 11.5	0.83	1.66
18	180			5 × 15	1.30	2.60	6.3 × 15	0.80	1.60
22	220			6.3 × 11	0.71	1.42	8 × 11.5	0.68	1.36
33	330			6.3 × 11	0.71	1.42	10 × 12.5	0.46	0.92
							▲ 8 × 15	0.45	0.90
39	390			6.3 × 15	0.70	1.40			
47	470			8 × 11.5	0.342	0.684	10 × 16	0.37	0.74
							▲ 8 × 20	0.37	0.74
68	680			8 × 11.5	0.342	0.684	10 × 20	0.30	0.60
82	820						10 × 25	0.25	0.50
100	101			10 × 12.5	0.256	0.512	12.5 × 20	0.18	0.36
				▲ 8 × 15	0.230	0.460			
120	121			10 × 16	0.194	0.388			
150	151			10 × 16	0.194	0.388	12.5 × 25	0.13	0.26
180	181			10 × 20	0.147	0.294	12.5 × 31.5	0.12	0.24
				▲ 12.5 × 15	0.150	0.300	▲ 16 × 20	0.13	0.26
220	221			10 × 20	0.147	0.294	16 × 25	0.10	0.20
				▲ 10 × 25	0.130	0.260	▲ 18 × 20	0.11	0.22
270	271			16 × 15	0.090	0.180			
330	331			12.5 × 20	0.085	0.170	16 × 25	0.090	0.18
390	391			12.5 × 25	0.070	0.140	18 × 25	0.083	0.166
				▲ 18 × 15	0.086	0.172			
470	471			12.5 × 25	0.070	0.140	16 × 31.5	0.076	0.152
				▲ 12.5 × 31.5	0.055	0.110			
				※ 16 × 20	0.059	0.118			
560	561						18 × 31.5	0.068	0.136
680	681			16 × 25	0.050	0.100	16 × 35.5	0.064	0.128
				▲ 12.5 × 35.5	0.047	0.094			
				※ 18 × 20	0.055	0.110			
820	821			16 × 31.5	0.043	0.086			
				▲ 18 × 25	0.043	0.086			
1000	102			16 × 31.5	0.043	0.086	18 × 40	0.047	0.094
				▲ 16 × 35.5	0.036	0.072			
1200	122			18 × 31.5	0.032	0.064			
1500	152			18 × 35.5	0.030	0.060			
2200	222			18 × 40	0.028	0.056			

▲ : In this case, [6] will be put at 12th digit of type numbering system.

※ : In this case, [3] will be put at 12th digit of type numbering system.

Cap. (μF)	V(Code)	Code	160		200		250		315		350		400		450	
			2C		2D		2E		2F		2V		2G		2W	
0.47	R47		6.3 × 11	12	6.3 × 11	12	6.3 × 11	12	8 × 11.5	11	8 × 11.5	11				
1	010		6.3 × 11	17	6.3 × 11	17	6.3 × 11	17	8 × 11.5	16	10 × 12.5	17	10 × 12.5	16	10 × 12.5	18
2.2	2R2		6.3 × 11	25	6.3 × 11	25	8 × 11.5	29	10 × 12.5	28	10 × 16	31	10 × 16	27	10 × 20	29
3.3	3R3		8 × 11.5	36	8 × 11.5	36	10 × 12.5	42	10 × 12.5	34	10 × 16	38	10 × 20	36	12.5 × 20	41
4.7	4R7		8 × 11.5	43	10 × 12.5	50	10 × 12.5	50	10 × 16	45	10 × 20	49	10 × 20	43	12.5 × 20	49
10	100		10 × 12.5	70	10 × 16	80	10 × 20	88	10 × 20	72	12.5 × 20	82	12.5 × 25	72	16 × 25	75
22	220		10 × 20	130	10 × 20	140	12.5 × 25	155	12.5 × 25	120	16 × 25	130	16 × 25	110	16 × 31.5	115
33	330		12.5 × 20	180	12.5 × 25	190	12.5 × 25	190	16 × 25	155	16 × 31.5	160	16 × 31.5	140	● 18 × 35.5	145
47	470		12.5 × 25	220	12.5 × 25	220	16 × 25	230	16 × 35.5	190	● 18 × 35.5	200	● 18 × 35.5	170	20 × 40	175
100	101		16 × 25	330	16 × 31.5	335	● 18 × 35.5	340	Δ 18 × 40	285	20 × 40	290	22 × 50	350	25 × 50	350
220	221		● 18 × 35.5	500	Δ 18 × 40	515	20 × 40	525	22 × 50	540	25 × 50	550				
330	331		20 × 40	900	22 × 40	1100	22 × 50	1150								
470	471		22 × 50	1200	22 × 50	1310	25 × 50	1350								

※ Rated ripple current (mA) at 105°C 120Hz

Size φ20 × 31 is available for capacitors marked " ● "

Size φ20 × 35 is available for capacitors marked " Δ "

In this case, [6] will be put at 12th digit of type numbering system.