

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[5519A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 5519A
IEC 1010 Compliant Replacement Test
Leads For Sheathed Style DMM's

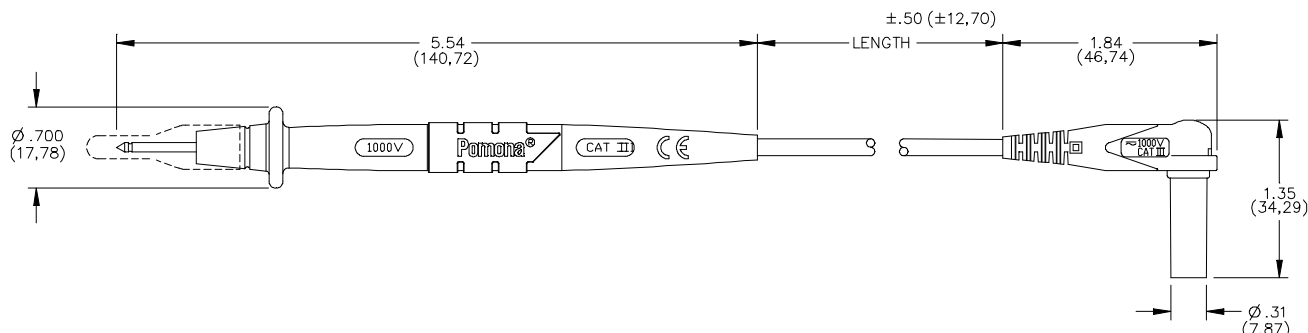

FEATURES:

- Designed for Fluke, H-P, Tektronix and Wavetek DMM's with a safety style of sheathed banana jack.
- Probe body incorporates a two step mold process. First step is Polypropylene for probe rigidity. Second step is Santoprene® rubber for handling comfort, added insulation protection and wire strain relief.
- Probe test leads are designed with over-voltage spike protection of up to 6kV.
- Probe body inner insulation is fire retardant Polypropylene for added safety.
- Probe body and banana plug are molded directly to the wire for robust pull strength.
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.
- UL Rated test accessory

MATERIALS:

Probe Body: Outer Insulation - Santoprene® Rubber, Color: Gray

Inner Insulation – Polypropylene, Fire Retardant, Color: One Black, One Red

Tip: Nickel plated brass

Wire: 18 AWG, 65 x 36 Tinned Copper Stand, Silicone Insulation, Length: 48" (122cm), O.D. .144" (3,66mm)

Banana Plug: Body – Brass, Nickel Plated

Spring – Beryllium Copper, Nickel Plated

Insulation – PVC, Color: One Black, One Red

RATINGS:

IEC 1010-2-031, Category III, P2 Compliant

Operating Voltage: 1000 VRMS/DC

Current: 10 Amperes

UL Rated

ORDERING INFORMATION: Model 5519A

Includes a set of one black and one red test lead

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA