

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ECS Inc. International](#)
[ECS-200-20-5PX-TR](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



- ▶ Cost effective
- ▶ Low profile
- ▶ Industry Standard Footprint
- ▶ Pb Free/RoHS Compliant
- ▶ MSL 1

CSM-7X

SMD Quartz Crystal

The CSM-7X is an excellent choice for a low cost SMD crystal. The CSM-7X (5PX) has a case height of 4.3 mm Max. in a resistance weld metal package. Lower profile package height of 3.2 mm Max. is available with the (5PLX) package.


OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	CSM-7X			UNITS
		MIN	TYP	MAX	
Frequency Range	fo	3.57		70.00	MHz
Frequency Tolerance	at +25°C			± 30	ppm
Frequency Stability	Standard -10 to +70°C			± 50	ppm
Shunt Capacitance	Co			7	pF
Load Capacitance (CL)	Specify in P/N	10	20	Series	pF
Drive Level				500	μW
Operating Temperature		-10		+70	°C
Storage Temperature		-55		+125	°C
Aging (Per Year)	@ +25°C ±3°C			±5	ppm

EQUIVALENT SERIES RESISTANCE/MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω
3.57 ~ 4.999	Fundamental	150	13.000 ~ 19.999	Fundamental	40
5.000 ~ 5.999	Fundamental	80	20.000 ~ 30.000	Fundamental	30
6.000 ~ 6.999	Fundamental	70	26.000 ~ 39.999	3rd Overtone	100
7.000 ~ 8.999	Fundamental	60	40.000 ~ 70.000	3rd Overtone	80
9.000 ~ 12.999	Fundamental	50			

PACKAGE DIMENSIONS (mm)

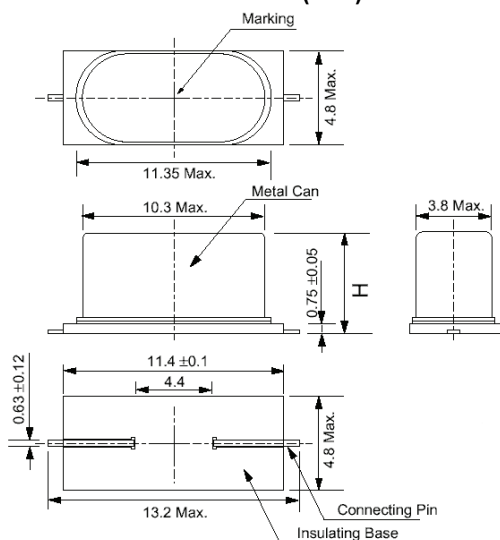

Height "H" MAX	
-5PX	-4.3 mm
-5PLX	-3.2 mm

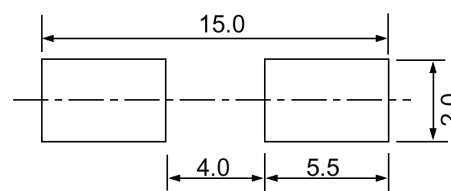


Figure 1) Top, Side, Bottom and End views

Figure 2) Suggested Land Pattern

PART NUMBERING GUIDE: Example ECS-200-20-5PX-TR

ECS - Frequency Abbreviation - Load Capacitance - Package

200 = 20.000 MHz
See P/N Guide

20 = 20 pF
S=Series

5PX = 4.3 mm
5PLX = 3.2 mm

Custom Options

Tolerance

A= ± 25 ppm
J= ± 20 ppm
R= ± 15 ppm
C= ± 10 ppm

*Stability

D= ± 100 ppm
E= ± 50 ppm
G= ± 30 ppm
H= ± 25 ppm
T= ± 20 ppm
W= ± 15 ppm
K= ± 10 ppm

Temperature

M= -20 ~ +70°C
N= -40 ~ +85°C
P= -40 ~ +105°C
S= -40 ~ +125°C
U= -55 ~ +125°C

*Consult Factory for available stability options over extended temp range

- Packaging

TR= Tape
& Reel
1K/Reel