

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sullins Connector Solutions](#)
[PXC36DBAN](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



SULLINS PART NUMBER PXC36DBAN

SULLINS ELECTRONICS CORP


SAN MARCOS, CA 760-744-0125 FAX 760-744-6081

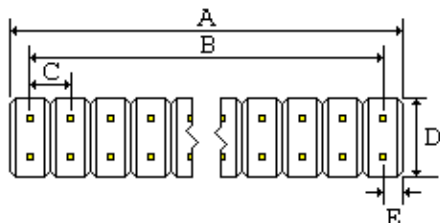

A = 3.600+-0.020 [91.44+-0.51]
B = 3.500+-0.008 [88.90+-0.20]
C = 0.100+-0.003 [2.54+-0.08]
D = 0.240+-0.005 [6.10+-0.13]
E = 0.050+-0.005 [1.27+-0.13]
F = 0.100+-0.005 [2.54+-0.13]
G = 0.230+-0.015 [5.84+-0.38]
H = 0.100+-0.005 [2.54+-0.13]
I = 0.060+-0.005 [1.52+-0.13]
J = 0.100+-0.005 [2.54+-0.13]
K = 0.100+-0.015 [2.54+-0.38]

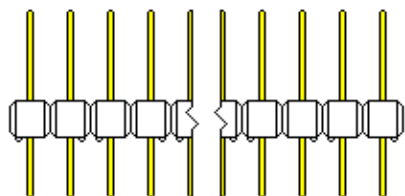

.025[0.64] SQUARE POSTS FIT .040[1.02] MINIMUM DIAMETER HOLE



Right angle bent tails not shown in bottom view

- 1.0 SPECIFICATIONS FOR A DUAL 36/72 POSITION HEADER
- 2.0 INSULATOR MATERIAL: THERMOPLASTIC POLYESTER
- 3.0 CONTACT MATERIAL: CA510, PHOSPHOR BRONZE GRADE A
- 4.0 PLATING: .000030" GOLD ON HEADS, .000100" TIN ON TAILS, .000050" NICKEL UNDERPLATE
- 5.0 TEMPERATURE: TO 125 DEGREES C CONTINOUS
- 6.0 UL FLAMMABILITY RATING: 94V-0
- 7.0 VOLTAGE RATING: 600 VDC MINIMUM AT SEA LEVEL
- 8.0 CURRENT RATING: 3 AMPERES
- 9.0 INSULATION RESISTANCE: 5,000 MEGA OHMS
- 10.0 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
- 11.0 NOT DRAWN TO SCALE

SULLINS PART NUMBER: PXC36DBAN

DATE: 11-30-04

[Print PDF](#)