

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\)](#)
[MMST3906-TP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST3906

Features

- Epitaxial Planar Die Construction
- Complementary NPN Type available (MMST3904)
- Ultra-small surface mount package
- Marking : K5N
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Halogen free available upon request by adding suffix "-HF"

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current-Continuous ⁽¹⁾	200	mA
P_C	Power dissipation ⁽¹⁾	200	mW
T_J	Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS ⁽²⁾

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0mA$, $I_B=0$)	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu A$, $I_E=0$)	40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_C=10\mu A$, $I_C=0$)	5.0	---	Vdc
I_{CEX}	Collector-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc
I_{BL}	Emitter-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc


ON CHARACTERISTICS ⁽²⁾

h_{FE}	DC Current Gain ($I_C=100\mu A$, $V_{CE}=1.0Vdc$) ($I_C=1.0mA$, $V_{CE}=1.0Vdc$) ($I_C=10mA$, $V_{CE}=1.0Vdc$) ($I_C=50mA$, $V_{CE}=1.0Vdc$) ($I_C=500mA$, $V_{CE}=1.0Vdc$)	60 80 100 60 30	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	---	0.20 0.30	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	0.65 ---	0.85 0.95	Vdc

Note: 1. Valid provided that terminals are kept at ambient temperature.
 2. Pulse test: Pulse width<300us, duty cycle<2%


PNP Small Signal Transistors

SOT-323

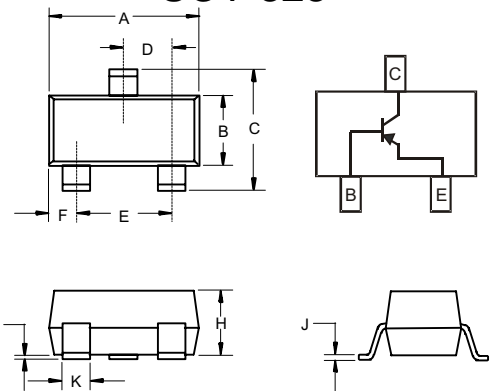

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

Suggested Solder Pad Layout

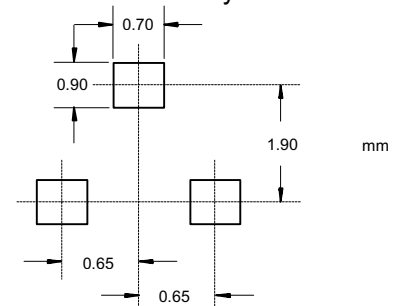

MMST3906



Micro Commercial Components

SMALL SIGNAL CHARACTERISTICS

C_{obo}	Output Capacitance ($V_{CB}=5.0Vdc, f=1.0MHz, I_E=0$)	---	4.5	pF
C_{ibo}	Input Capacitance ($V_{EB}=0.5Vdc, f=1.0MHz, I_C=0$)	---	10	pF
h_{ie}	Input Impedance	2.0	12	kohms
h_{re}	Voltage Feedback Ratio	0.1	10	$\times 10^{-4}$
h_{fe}	Small Signal Current Gain	100	400	---
h_{oe}	Output Admittance	3.0	60	μS
f_T	Current Gain-Bandwidth Product ($V_{CE}=20Vdc, I_C=10mAdc, f=100MHz$)	300	---	MHz
NF	Noise Figure ($V_{CE}=5.0Vdc, I_C=100\mu Adc, R_S=1.0KOHMS, f=1.0KHz$)	---	4.0	dB

SWITCHING CHARACTERISTICS

t_d	Delay Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$	---	35	ns
t_r	Rise Time	$V_{BE(off)}=0.5Vdc, I_{B1}=1.0mAdc$	---	35	ns
t_s	Storage Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$	---	225	ns
t_f	Fall Time	$I_{B1}=I_{B2}=1.0mAdc$	---	75	ns



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel; 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.