



Distributor of Texas Instruments: Excellent Integrated System Limited

Datasheet of RI-116-112A - RFID TRANSP CIRC IN-LAY 13.56MHZ

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Texas Instruments](#)
[RI-116-112A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Tag-it™ HF-I Transponder Inlay - 24.2mm Circular -

The Tag-it HF-I Transponder Inlay is compliant with the ISO/IEC 15693 and ISO/IEC 18000-3 standard. With a user memory of 2k bits, organized in 64 blocks, the Tag-it HF-I Transponder Inlays allows advanced solutions for a variety of applications, including product authentication, ticketing, library management, supply chain management etc. The thin and flexible Tag-it HF-I Transponder Inlays can be easily converted into paper or plastic labels.

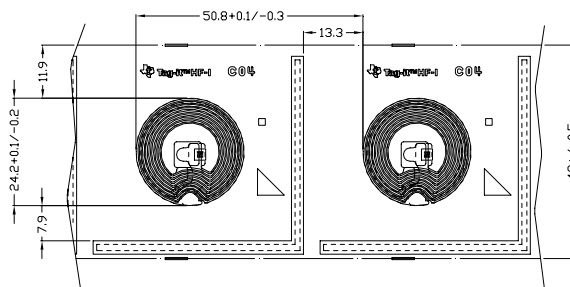

Specifications:

Part Number	RI-116-112A
Supported Standard	ISO/IEC 15693-2,-3; ISO/IEC 18000-3
Recommended Operating frequency	13.56 MHz
Passive Resonance Frequency (at +25°C)	13.70 MHz ± 400kHz (includes frequency offset to compensate further integration into paper or PVC lamination)
Typ. required activation field strength to read (at +25°C)	113 dBμA/m [#]
Typ. required activation field strength to write (at +25°C)	116 dBμA/m [#]
Factory programmed Read Only Number	64 bits
Memory (user programmable)	2k bits organized in 64 x 32-bit blocks
Typical programming cycles (at +25°C)	100,000
Data retention time (at +55°C)	> 10 years
Simultaneous Identification of Tags	Up to 50 tags per second (reader/antenna dependent)
Antenna size	Ø 24.2 mm +0.1mm/-0.2mm (~0.95 in)
Foil width	48 mm ± 0.5 mm (1.89 in ± 0.02 in)
Foil pitch	50.8 mm +0.1mm/-0.3mm (2 in)
Thickness	Chip area: 0.355mm (~0.014 in) Antenna area: 0.085mm (~0.0033 in)
Base material	Substrate: PET (Polyethylenetherephalate) Antenna: Aluminum
Smallest bending radius allowed	18 mm (~0.71 in)
Operating temperature	-25°C to +70°C
Storage temperature (single inlay)	-40°C to +85°C (warpage may occur at upper temperature range)
Storage temperature (on reel)	-40°C to +40°C
Delivery	Single row tape wound on cardboard reel with 500 mm diameter Reel outer width: approx. 60 mm (~2.36 in) Reel inner width: approx. 50 mm (~1.97 in) Hub diameter: 76.2 mm (3 in)
Typical quantity of good units per reel	5,000

Note: For highest possible read-out coverage we recommend to operate readers at a modulation depth of 20% or higher

[#] After integration into paper or PVC lamination


For more information, contact the sales office or distributor nearest you. This contact information can be found on our web site at: <http://www.ti-rfid.com>

Supported Command Set

Request	Request Code	Request Mode				
		Inventory	Addressed	Non-Addressed	Select	AFI
ISO 15693 Mandatory and Optional Commands						
Inventory	0x01	✓	-	-	-	✓
Stay Quiet	0x02	-	✓	-	-	-
Read_Single_Block	0x20	✓	✓	✓	✓	✓
Write_Single_Block	0x21	-	✓	✓	✓	-
Lock_Block	0x22	-	✓	✓	✓	-
Read_Multi_Blocks	0x23	✓	✓	✓	✓	✓
Write_Multi_Blocks	0x24	-	-	-	-	-
Select Tag	0x25	-	✓	-	-	-
Reset to Ready	0x26	-	✓	✓	✓	-
Write_AFI	0x27	-	✓	✓	✓	-
Lock_AFI	0x28	-	✓	✓	✓	-
Write_DSFD	0x29	-	✓	✓	✓	-
Lock_DSFD	0x2A	-	✓	✓	✓	-
Get_System_info	0x2B	✓	✓	✓	✓	✓
Get_M_Blk_Sec_St	0x2C	✓	✓	✓	✓	✓
TI Custom Commands						
Write_2_Blocks	0xA2	-	✓	✓	✓	-
Lock_2_Blocks	0xA3	-	✓	✓	✓	-

✓: Implemented
 -: Not applicable

Memory Organization

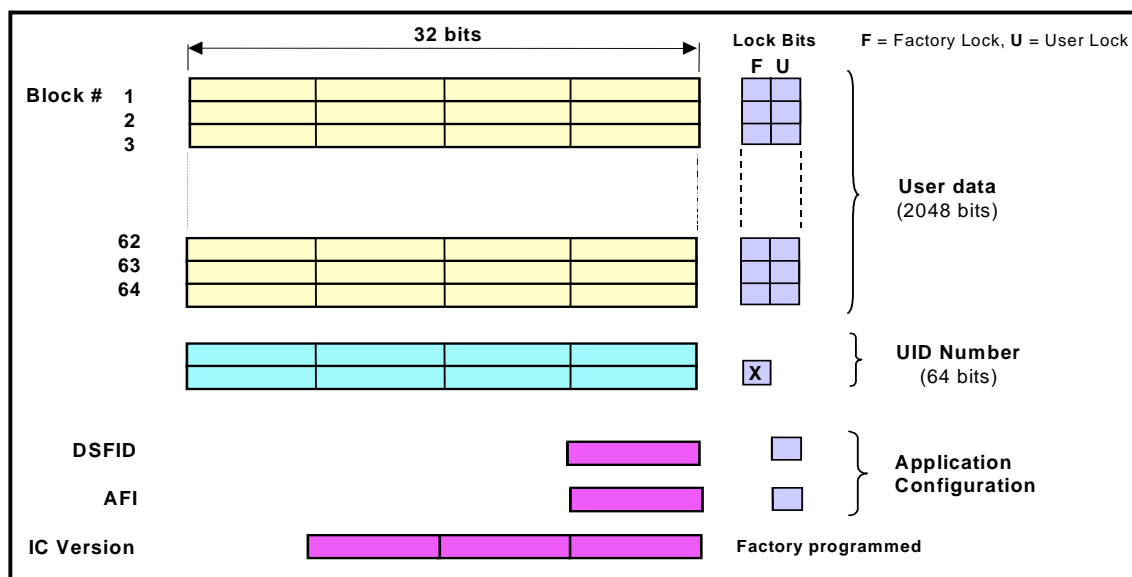

Texas Instruments reserves the right to change its products and services at any time without notice. TI provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customers products. Therefore, TI assumes no responsibility for customer product design or for infringement of patents and/or the rights of third parties, which may result from assistance provided by TI.