

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[2798](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona[®]

**Model 2798
 Phone Plug (WE 310) To
 BNC Female Adapter**

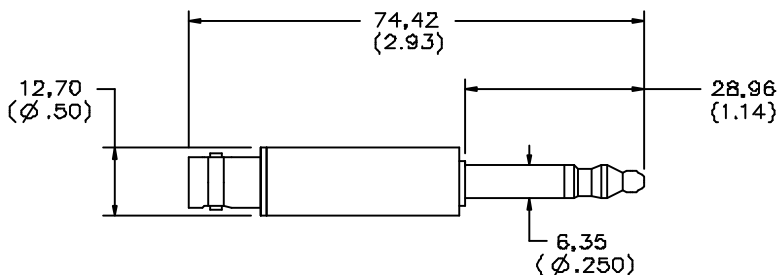

FEATURES:

- This telephone plug is commonly used in switching panels and telecommunication equipment.
- Readily adapts telecommunication equipment for connection to BNC coaxial cables.
- Only the tip and ring are connected. The tip is connected to center contact and the ring is connected to the shell of the BNC. The sleeve is floating.

MATERIALS:

BNC: Outer shell is brass with tarnish resistant plating. Center contact is Beryllium Copper with gold plating.

Plug: Brass with black ABS insulation. Marking: "Model 2798"

RATINGS:

Operating Voltage: 500V (Disconnect power before handling)

Operating Temperature: +50°C (+122°F) Max.

ORDERING INFORMATION: Model 2798

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA