

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[3787-C-18](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 3787
BNC Male To
Minigrabber® Test Clips

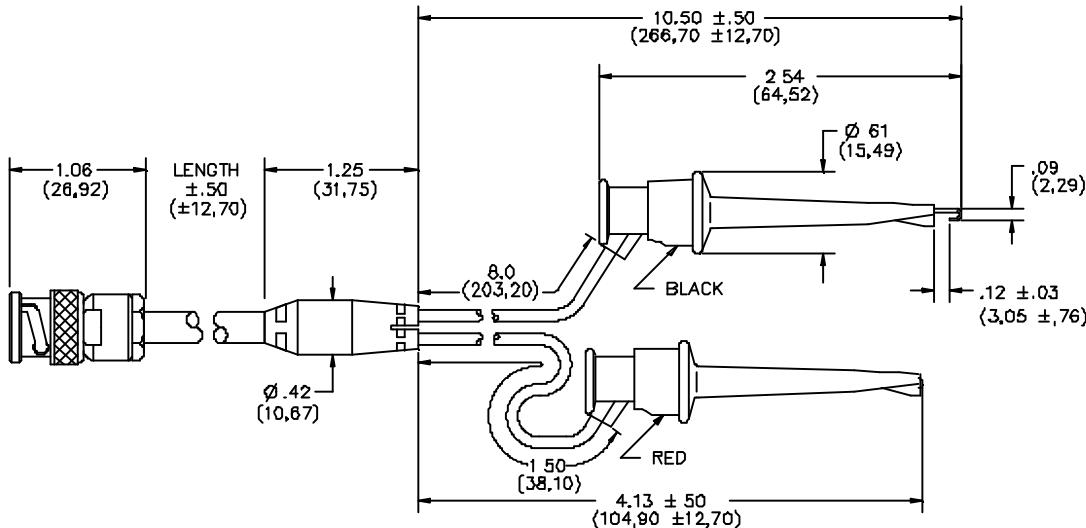

FEATURES:

- Cable assembly is perfect for interfacing test instruments to discrete test points.
- BNC connector is the highest quality, field replaceable construction. The nickel plated shell resists corrosion and the gold plated center contact promotes high quality, low resistance connections in the field and the laboratory.
- Breakout wires are crimped to the cable conductors and over-molded with a flexible PVC strain relief for long service life.

MATERIALS:

BNC Male: Body - Brass, Tarnish Resistant Plating, Center Contact - Brass, Gold Plated,

Dielectric: PTFE, Impedance: 50 Ohms

Minigrabber® Test Clips: Contact, Beryllium Copper, Gold Plated, Insulation: Nylon, Color: One Black/One Red

Breakout Wires: 20 AWG, 41 x 36 t.c., PVC Insulation, O.D. .087" (2.21 mm), Color Matches Grabbers

Molded Breakout: PVC, Color: Black

Cable: RG58C/U Coaxial cable, Non-contaminating PVC jacket. Impedance: 50 Ohms

RATINGS:

Operating Voltage: 45 VRMS Max.

Operating Temperature: +50° C (+122° F)

ORDERING INFORMATION: Model 3787-C-XX

XX = Length in Inches

Standard Lengths: -18" (45.72), -24" (61), -36" (91.44), -48" (122), -60" (152.4)

Additional lengths can be quoted upon request.

Ordering Example: 3787-C-36 Cable length is 36" (91.44)

All dimensions are in inches. Tolerances (except noted): .xx = ± .02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA