

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[5092-K-36](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona®

**Model 5092  
Cable Assembly  
Phono Plug Both Ends**

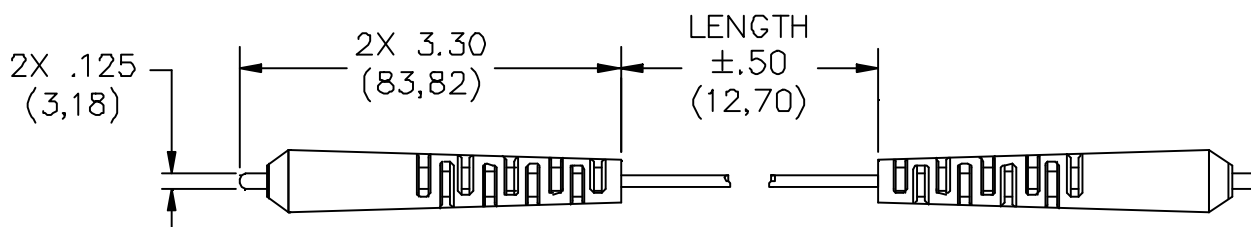

**MATERIALS:**

Connector: 1<sup>st</sup> End – Phono Plug

Body and Center Contact – Brass

Finish: Body and Center contact – Nickel plated

Strain Relief Boot: PVC molded to Phone plug and cable. Color: Black

Cable: RG 174/U, 26 AWG, 7 x 34 T.C. Bare copperweld, vinyl insulated 2.54 (.100) O.D.

Color: Black

Marking: “POMONA ELECTRONICS 5092-K-XX”

Connector: 2<sup>nd</sup> End – Phono

Body and Center Contact – Brass

Finish: Body and Center contact – Nickel plated

Strain Relief Boot: PVC molded to Phone plug and cable. Color: Black

Cable: RG 174/U, 26 AWG, 7 x 34 T.C. Bare copperweld, vinyl insulated 2.54 (.100) O.D.

Color: Black

Marking: “POMONA ELECTRONICS 5092-K-XX”

**RATINGS:**

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 500 VRMS

Nominal Impedance: 50 Ohms

Nom. Cap: 30.8 pF/FT.

**ORDERING INFORMATION:** Model 5092-K-XX

XX = Length in inches. Std. Lengths: 18” (45,72cm), 24” (60,96 cm), 36” (91,44 cm), 48” (121,92 cm). Additional lengths can be quoted upon request. Ordering Example: 5092-K-36, Cable length will be 36” (9,44mm) long.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA