

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[6232A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Model 6232A
Modular Test Probe with
Standard 0.080 (2mm) Tip

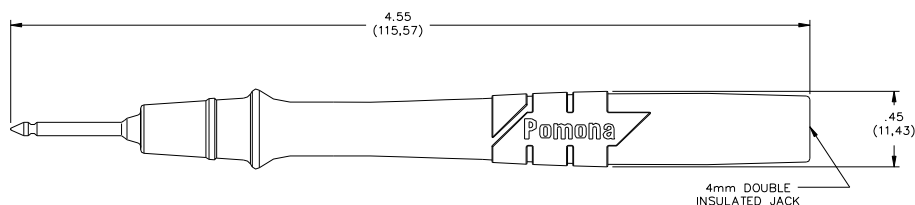

FEATURES:

- Modular designed for use with Pomona CE test lead sets, or any other modular test leads with a CE safety style sheathed banana jack.
- Notched .080" (2mm) probe tip; notch near probe tip end helps keep probe from sliding off test points.
- Probe tip mates with 0.080 (2mm) pin tip jacks.

MATERIALS:

Probe Body: Black or Red Polypropylene
 Tip: Nickel plated brass, notched .080" (2mm) tip
 Jack: Nickel plated brass, .166 (4mm) safety style sheathed banana jack

RATINGS:

IEC 1010-2-031, Category III
 Operating Voltage: 1000 Vrms/DC
 Current: 10 Amperes

ORDERING INFORMATION:

Model# 6232A (Set includes one black and one red probe)

Probes can be used with the following Pomona CE test lead sets:

- 5907A * Straight banana plug to right-angle banana plug test lead set; length 48" (122.0cm)
- 5908A * Straight banana plug to straight banana plug test lead set; length 48" (122.0cm)
- 5909A * Right-angle banana plug to right-angle banana plug test lead set; length , 48" (122.0cm)
- 6358 * Straight banana plug to Retractable sheath banana plug test lead set; length 48" (122.0cm)

* See data sheets for specifications

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA



Model 6232A
Modular Test Probe with
Standard 0.080 (2mm) Tip

Pomona®

The items included with this product are certified to meet IEC 1010-2-031 safety requirements.

Les éléments inclus avec ce produit sont certifiés pour répondre à des exigences de sûreté du IEC 1010-2-031.

Los items incluidos con este producto se certifican para resolver requisitos de seguridad del IEC 1010-2-031.

- Only IEC 1010 type shrouded test plugs should be used with IEC 1010 type jacks. NEVER INSERT A PROBE TIP WITH BANANA SPRING INTO A TEST ACCESSORY JACK THAT WILL BE USED AS A HAND HELD PROBING DEVICE

-Seuls les vérificateurs de tension renforcés de type IEC 1010 devraient être utilisés avec des jacks de type IEC 1010. NE JAMAIS INSERER DE BOUT DE SONDE AVEC RESSORT BANANE DANS UN JACK D'ESSAI D'ACCESSOIRES QUI SERA UTILISE COMME DISPOSITIF DE SONDAGE A MAIN.

-Se deben usar sólo topones de prueba reforzados del tipo IEC 1010 con receptáculos de tipo IEC 1010. NUNCA INTRODUZCA UNA CLAVIJA CON UN MUELLE TIPO BANANA EN UN RECEPTACULO DE PRUEBA QUE A SU VEZ SE USE COMO APARATO DE PRUEBA MANUAL.



Both Direct and Alternating Current.
 Courant Continu et Alternatif.
 Corriente Directa y Alterna.



Caution ! Refer to Accompanying Documents.
 Attention ! Se Reporter aux Documents joints.
 ¡ Peligro! Consulte los Documentos Adjuntos.



Double Insulation or Reinforced Insulation.
 Isolation Double ou Isolation Renforcée.
 Aislamiento Doble o Aislamiento Reforzado.



Caution ! Risk of Electric Shock.
 Attention ! Risque de Choc Électrique.
 ¡ Peligro! Riesgo de Sacudida Eléctrica.

CAT

Overvoltage Category I, II, III or IV.
 Surtension Catégorie I, II, III ou IV.
 Sobretensión de Categoría I, II III o IV.

Pomona Electronics 

PO Box 9090, Everett, WA 98206-9090 TEL: 800-490-2361

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com